


Z-PACK | Z-PACK 2mm HM

TE Internal #: 5352269-1 Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb /s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

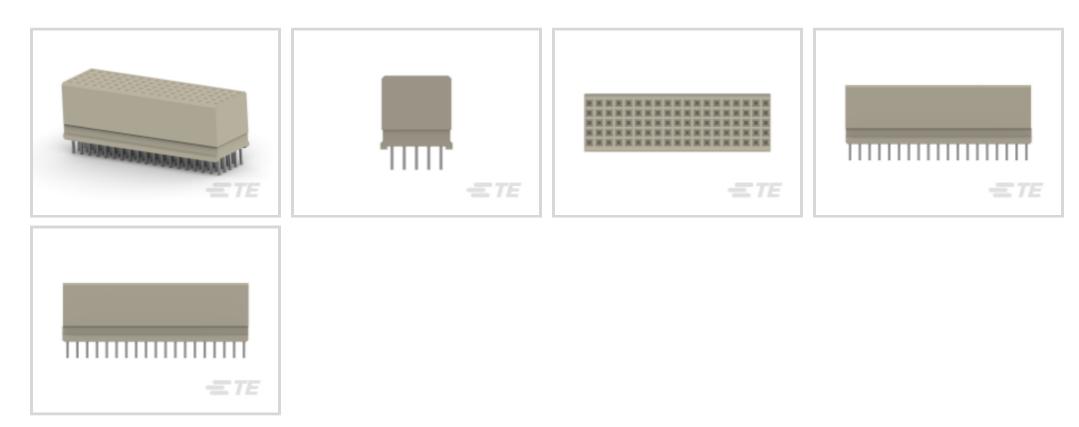

Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm

PCB Connector Assembly Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s**

Number of Columns: 19

Number of Rows: 5

Backplane Architecture: Mezzanine

All Hard Metric Backplane Receptacle Connector: Mezzanine, 2mm (27)



Features

Product Type Features

Backplane Interface Type	2mm HM
PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Mating & Unmating Configuration	Make First / Break Last
Rows Loaded	A, B, C, D, E
Number of Signal Positions	95
Number of Columns	19
Number of Rows	5
Backplane Architecture	Mezzanine

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Number of Positions	95
PCB Mount Orientation	Vertical
Signal Characteristics	
Crosstalk Version	Standard
Data Rate	≤1 Gb/s
Body Features	
Primary Product Color	Gray
Contact Features	
Feedthrough Post Length	3.3 mm
CompactPCI Designation	None
Contact Type	Socket
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Contact Current Rating (Max)	1.5 A

Mechanical Attachment

Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Backplane Module Length	38 mm
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	No
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Packaging Features

Packaging Quantity	11
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series Z-PACK 2mm HM

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



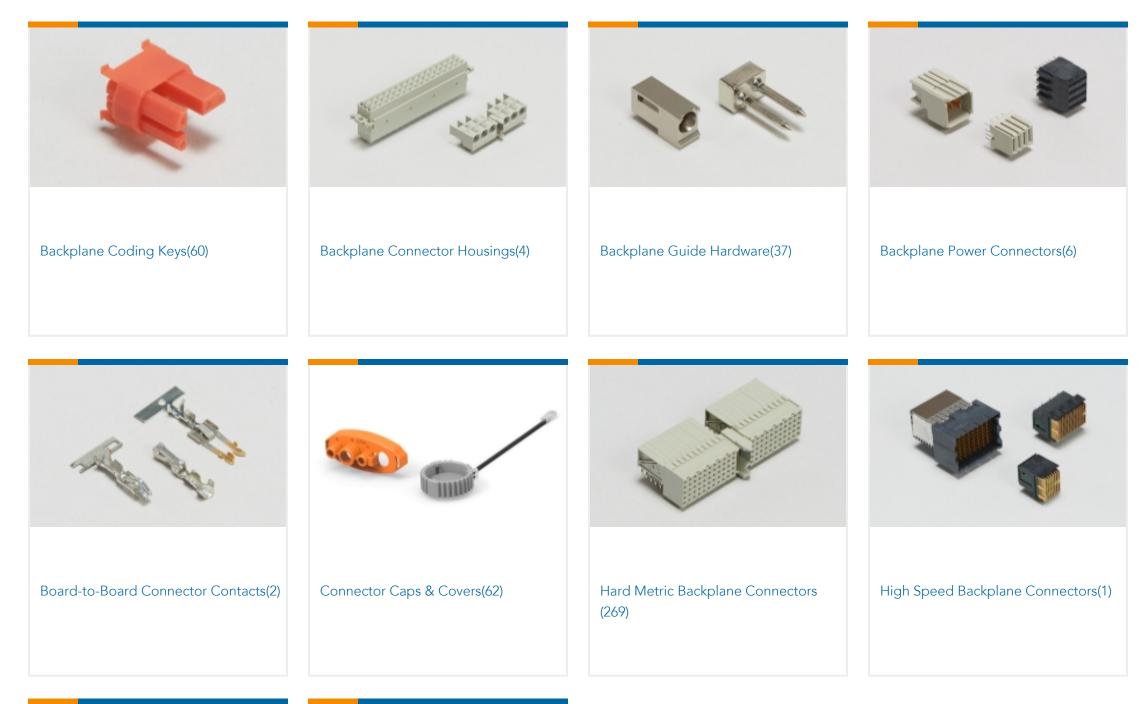




Insertion & Extraction Tools(2)

Rectangular Power Connectors(87)

Customers Also Bought

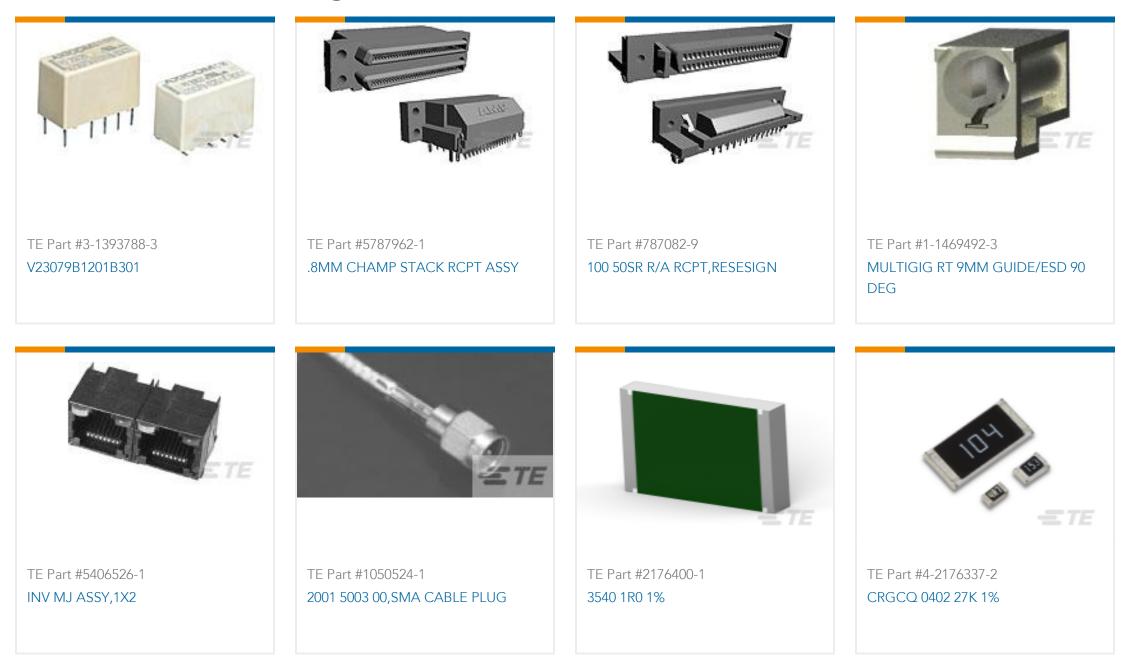

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 19 Column, 5 Row, Mezzanine, 95 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM





Documents

Product Drawings Z-PACK/B19 VF 95P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5352269-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5352269-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5352269-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance

TE Material Declaration

English