
53546-1 - ACTIVE

PIDG

TE Internal #: 53546-1 Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, .029 in [.73 mm] Barrel Inside Diameter, 202 – 810 CMA Wire Size, PIDG

View on TE.com >

Terminals & Splices > Splices > PIDG Butt Splices

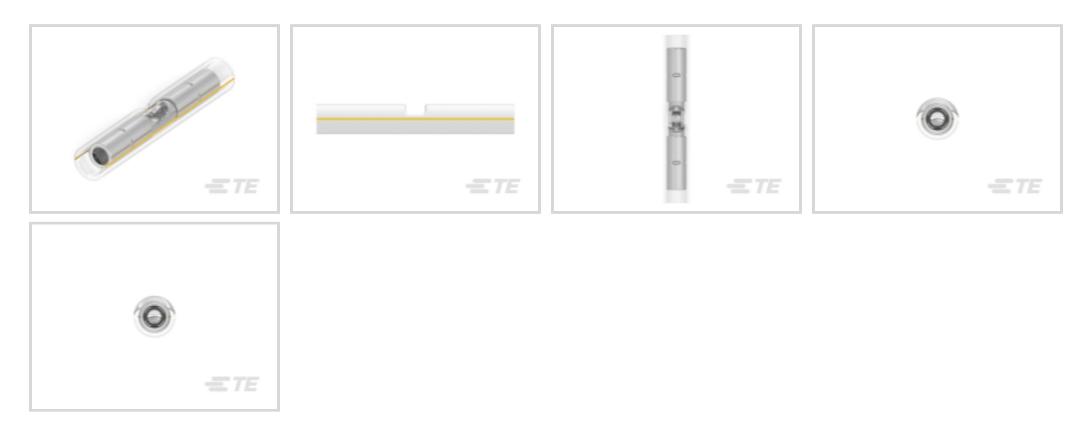

Wire Size: .12 – .4 mm²

Sealable: No

Splice Features: Serrated

Compatible Insulation Diameter Range: 2.09 mm [.082 in]

All PIDG Butt Splices (28)



Features

Product Type Features

Sealable	No			
Splice Type	Butt Splice			
Compatible With Discrete Wire Type	Stranded			
Wire Insulation Support Retention Type	Insulation Support			
Configuration Features				
Compatible With Wire & Cable Type	Discrete Wire			
Body Features				
Insulation Support Sleeve Material	Copper			
Insulation Material	PVF2			
Splice Features	Serrated			
Contact Features				
Military Part Class	Class I			
Terminal Plating Material	Tin-Lead			

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, .029 in [. 73 mm] Barrel Inside Diameter, 202 – 810 CMA Wire Size, PIDG



Contact Base Material	Copper			
Barrel Type	Closed			
Mechanical Attachment				
Wire Insulation Support	With			
Dimensions				
Wire Size	202 – 810 CMA			
Compatible Insulation Diameter Range	2.09 mm[.082 in]			
Barrel Inside Diameter	.73 mm[.029 in]			
Product Length	22.61 mm[.89 in]			
Usage Conditions				
Insulation Option	Fully Insulated			
Operating Temperature Range	150 °C[302 °F]			
Industry Standards				
Government Qualified Splice	Yes			
Packaging Features				
Packaging Quantity	1000			
Packaging Method	Loose Piece			

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part) Aticle Safe Usage Statements Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	


Product Compliance Disclaimer

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, .029 in [. 73 mm] Barrel Inside Diameter, 202 – 810 CMA Wire Size, PIDG



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

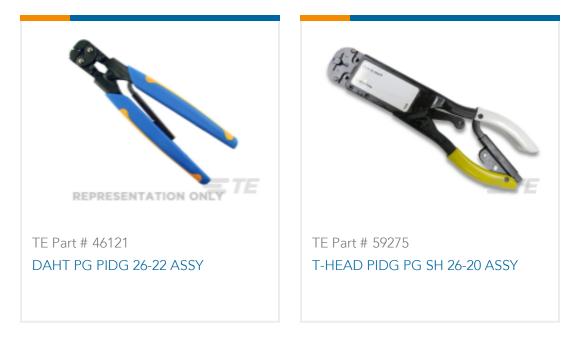


Also in the Series | PIDG




		Le L	
Compression Connectors(17)	Crimp Terminal Housings(1)	Crimp Wire Pins, Tabs & Ferrules(41)	Hand Crimping Tools(2)
		A CONTRACTOR OF CONTRACTOR	
Knife Disconnects(11)	PCB Terminals(7)	Quick Disconnects(49)	Ring Terminals(611)

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, .029 in [. 73 mm] Barrel Inside Diameter, 202 – 810 CMA Wire Size, PIDG



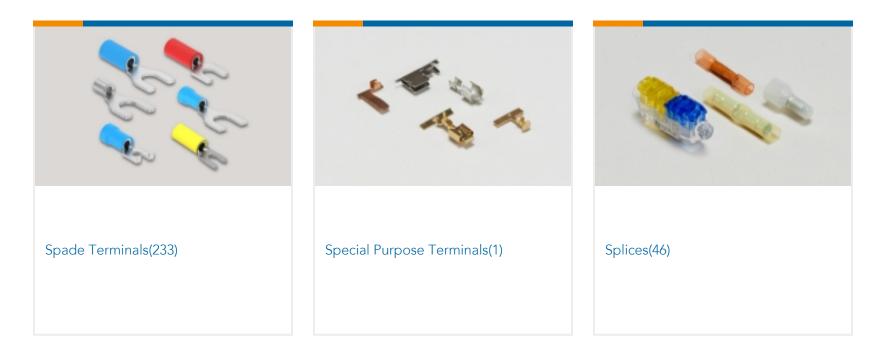

Customers Also Bought

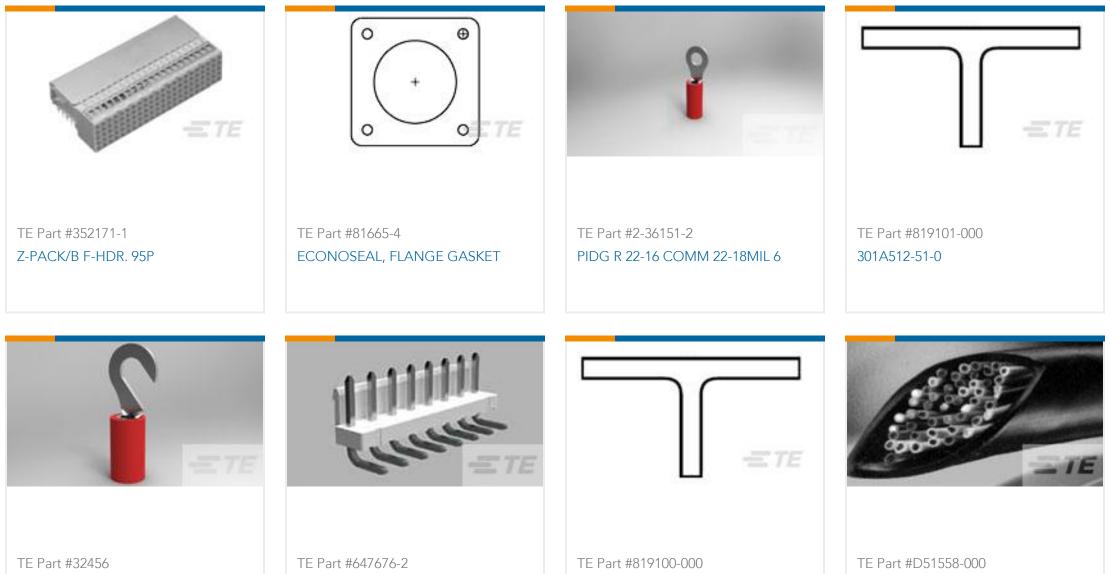

PIDG HK 22-16 COMM 22-18 MIL 8	3.96 EP HDR ASSY 2P R/A	301A511-51-0	NT-MIL-3/4-0-SP
TE			
TE Part #6-1622820-7 LAB KIT 1 3520 (1R0-1M)	TE Part #2176439-4 CRGH 1206 1% 10R-1M0 LAB-KIT		

Documents

Product Drawings SPLICE BUTT PVF2 PIDG 26-22

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_53546-1_P.2d_dxf.zip

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, .029 in [. 73 mm] Barrel Inside Diameter, 202 – 810 CMA Wire Size, PIDG



English

Customer View Model ENG_CVM_CVM_53546-1_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_53546-1_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages RADIATION_RESISTANT_PRE-INSULATED_TERMINALS_SPLICES

English

Product Specifications Application Specification

English