


TE Internal #: 5406217-1 RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ45 Connectors

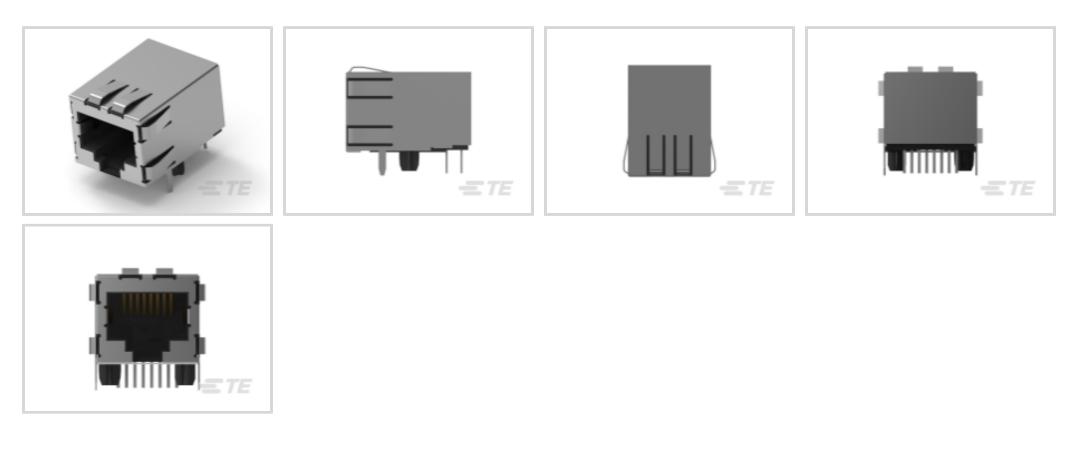

Modular Jack & Plug Interface Type: RJ45 Port Configuration: Single Port Port Matrix Configuration: 1 x 1 Modular Jacks & Plugs Products: RJ Type Jacks & Plugs Connector Contact Density: Standard

Features

Product Type Features

Connector Product Type	Connector Assembly	
Modular Jack & Plug Interface Type	RJ45	
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs	
Modular Connector Style	Jack	
Grounding Options	PCB and Panel Ground	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Status Indicator Type	None	
Panel Ground Location	Top and Side, Top	
Number of PCB Ground Tabs	2	
Port Configuration	Single Port	
Port Matrix Configuration	1 x 1	
Connector Contact Density	Standard	
Number of Positions	8	
Number of Loaded Positions	8	

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down



PCB Mount Orientation	Right Angle	
Body Features		
PCB Ground Tab Location	4.57 mm[.18 in]	
Shield Plating Material	Tin	
Shield Material	Copper Alloy	
Modular Jack Latch Orientation	Standard - Latch Down	
Connector Profile	Standard	
Contact Features		
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin	
Contact Current Rating (Max)	.2 A, 1.5 A	
Contact Mating Area Plating Material	Gold	
Contact Base Material	Phosphor Bronze	
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]	
Termination Features		
Termination Method to Printed Circuit Board	Through Hole - Solder	
Termination Post & Tail Length	3.56 mm[.14 in]	

Mechanical Attachment

Panel Mount Feature	With	
Connector Mounting Type	Panel Mount	
Housing Features		
Mating Entry Location	Side	
Centerline (Pitch)	1.02 mm[.04 in]	
Housing Color	Black	
Housing Material	High Temperature Nylon	
Dimensions		
PCB Thickness (Recommended)	1.57 mm[.062 in]	
Connector Height	13.72 mm[.54 in]	
Usage Conditions		
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		

C For support call+1 800 522 6752

09/26/2023 12:40PM | Page 2

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down



Shielded	Yes	
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Performance Category	Cat 5e	
Packaging Features		
Packaging Quantity	80	
Packaging Method	Box & Tray, Tray	
Product Compliance		
For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)	

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Wave solder capable to 265°C

Does not contain REACH SVHC


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down



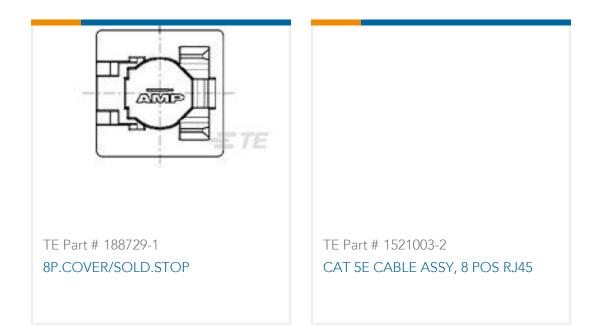

Customers Also Bought



707-06-02109=CONTACT,PIN,#20	708-68-01109=CONTACT,SKT,#20	902-84-02113=SCREW,SHOULDER,#6- 32	2084 0000 02



Documents

Product Drawings MJ ASSY,SG PSH W/RV PNL G TAB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5406217-1_D.2d_dxf.zip

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 5e, Standard - Latch Down



English

Customer View Model ENG_CVM_CVM_5406217-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5406217-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section

English

Product Specifications

Application Specification

English

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English