




Connectors > Modular Jacks & Plugs > RJ25 Connectors

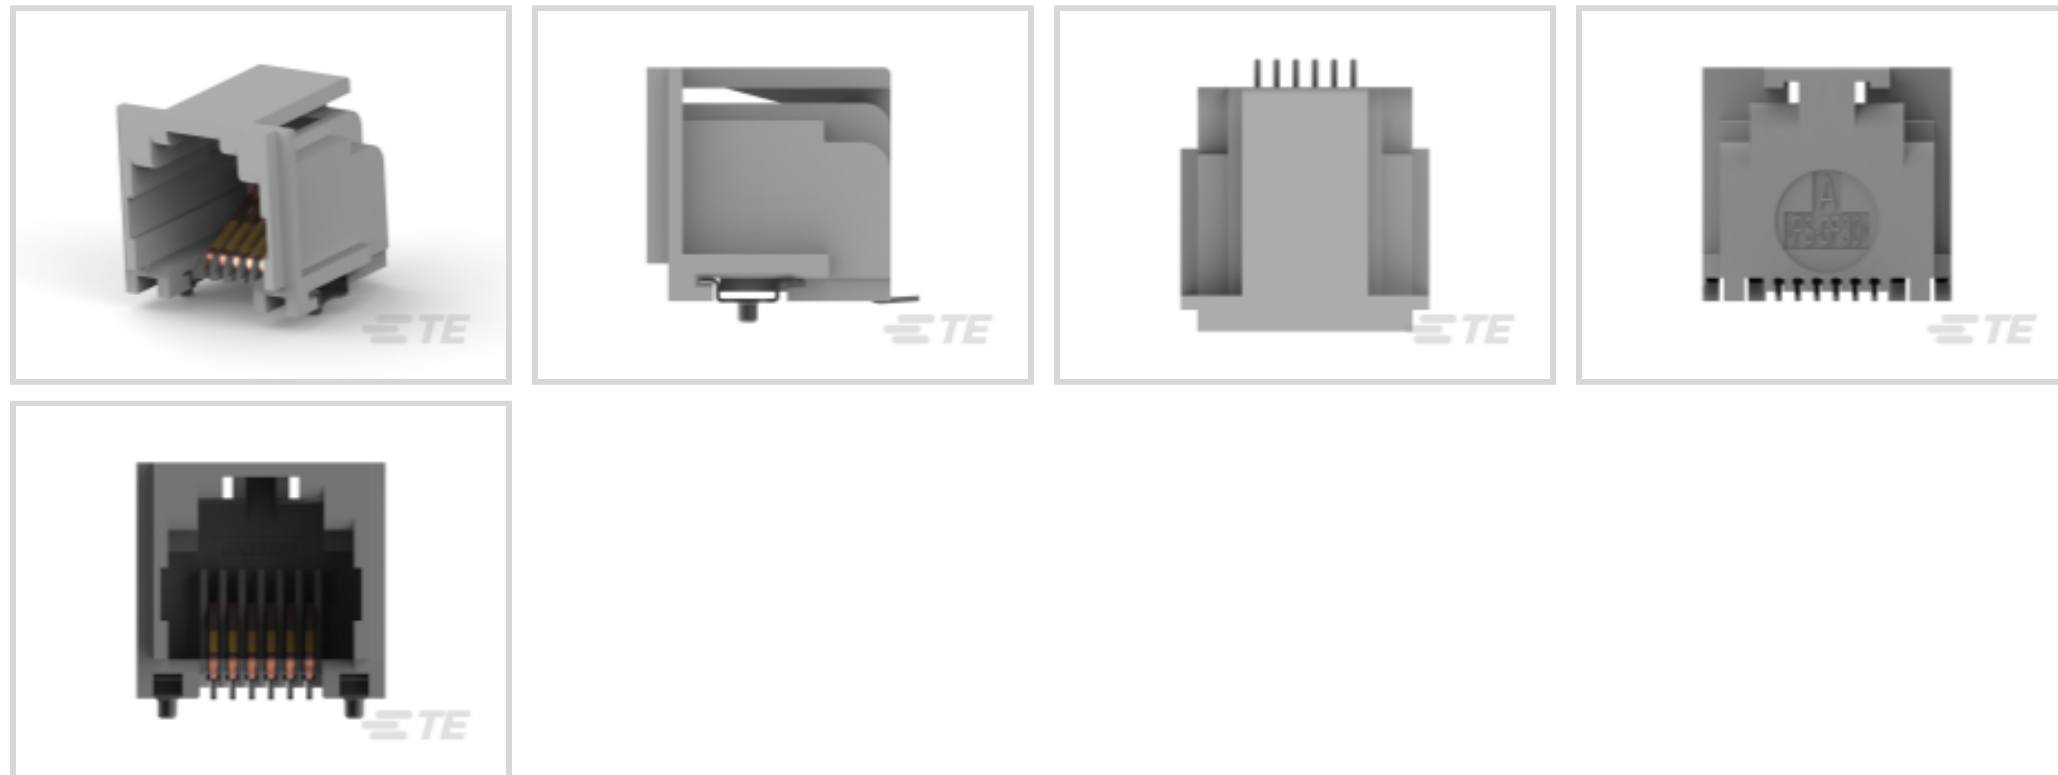

Port Configuration: **Single Port**

Port Matrix Configuration: **1 x 1**

Connector Profile: **Low**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

Features

Product Type Features

Grounding Options	None
Connector Product Type	Connector Assembly
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
PCB Mount Orientation	Right Angle
Number of Positions	6
Number of Loaded Positions	6

Body Features

--	--



Connector Profile	Low
-------------------	-----

Modular Jack Latch Orientation	Inverted - Latch Up
--------------------------------	---------------------

Contact Features

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Mating Area Plating Material	Gold
--------------------------------------	------

Contact Current Rating (Max)	1.5 A
------------------------------	-------

PCB Contact Termination Area Plating Material	Tin
---	-----

Termination Features

Termination Method to Printed Circuit Board	Surface Mount
---	---------------

Mechanical Attachment

Mating Alignment	Without
------------------	---------

Connector Mounting Type	Board Mount
-------------------------	-------------

Panel Mount Feature	With
---------------------	------

Housing Features

Mating Entry Location	Side
-----------------------	------

Housing Color	Gray
---------------	------

Housing Material	High Temperature Thermoplastic
------------------	--------------------------------

Centerline (Pitch)	1.02 mm[.04 in]
--------------------	-----------------

Dimensions

Connector Height	12.95 mm[.51 in]
------------------	------------------

PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
-----------------------------	---------------------------

Operation/Application

Shielded	No
----------	----

Circuit Application	Signal
---------------------	--------

Industry Standards

Performance Category	Cat 3
----------------------	-------

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

--	--

Packaging Method	Tape Mounted on Reel
------------------	----------------------

Packaging Quantity	200
--------------------	-----

Other

Modular Jacks & Plugs Comment	Inward boardlocks
-------------------------------	-------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---


Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Reflow solder capable to 245°C
---------------------------	--------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

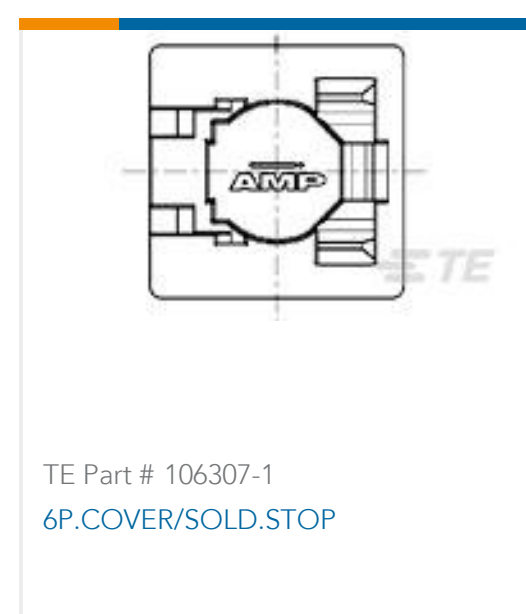

Customers Also Bought



TE Part #5050864-6
SOCKET,MIN-SPR SN SER-3



TE Part #643234-1
06P UMNL HDR ASSY R/A 94VO



TE Part #3-641209-4
04P MTA156 HDR ASSY FL ST LF



TE Part #643236-1
08P UMNL HDR ASSY R/A 94VO



TE Part #1-1879215-5
CPF 0402 5K62 0.1% 25PPM 1K RL



TE Part #2-1971845-3
3P, RAST 5 Tab Header, THV



TE Part #3-1971895-3
3P, RAST 5 Tab Header, THV



TE Part #504305-E
MCBA 12 M * SMD 137 * 176 * GURT * J 2 5



TE Part #7-1415539-4
PE013012

Documents

Product Drawings

[MJ,RJ11,SMT,6/6,GRAY,13" REEL](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_5406514-2_C.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5406514-2_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5406514-2_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



[82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section](#)

English

[Product Specifications](#)

[Application Specification](#)

English

[Product Environmental Compliance](#)

[MD_5406514-2_12122015023_dmtec](#)

English

[MD_5406514-2_12122015023_dmtec](#)

English