# 5415406-2 - ACTIVE

TE Internal #: 5415406-2 G Type RF Interface, Plug, 75  $\Omega,$  Push-On, 1 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount

#### View on TE.com >

Connectors > RF Connectors > Coax Connectors



RF Interface: G Type

RF Connector Style: Plug

RF Connector Mated Outer Diameter (Approximate): 12.95 mm [.51 in ]

Impedance:  $75 \Omega$ 

RF Connector Coupling Mechanism: Push-On

## Features

### Product Type Features



RF Interface	G Туре
RF Connector Style	Plug
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	75 Ω
Body Features	
Body Material	Zinc
Body Plating Material	Tin

#### 5415406-2

G Type RF Interface, Plug, 75  $\Omega$ , Push-On, 1 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount



## **Contact Features**

RF Connector Center Contact Underplating Material	Nickel
RF Connector Center Contact Plating Material	Tin
RF Connector Center Contact Material	Brass
Termination Features	
Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
RF Connector Coupling Mechanism	Push-On
Connector Mounting Type	Board Mount
RF Contact Captivation Method	Mechanical
Detent	Without
Dimensions	
Profile Height from PCB	13.46 mm[.53 in]
RF Connector Mated Outer Diameter (Approximate)	12.95 mm[.51 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

# Operation/Application

Operating Frequency	1 GHz
Packaging Features	
Packaging Method	Tube
Other	
RF Connector Comment	Includes board retention feature to prevent tipping during solder process.
Dielectric Material	Polypropylene
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

#### 5415406-2

G Type RF Interface, Plug, 75  $\Omega$ , Push-On, 1 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount



Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

#### Solder Process Capability

Not lead free process capable

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# Customers Also Bought



#### 5415406-2

G Type RF Interface, Plug, 75 Ω, Push-On, 1 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Board Mount



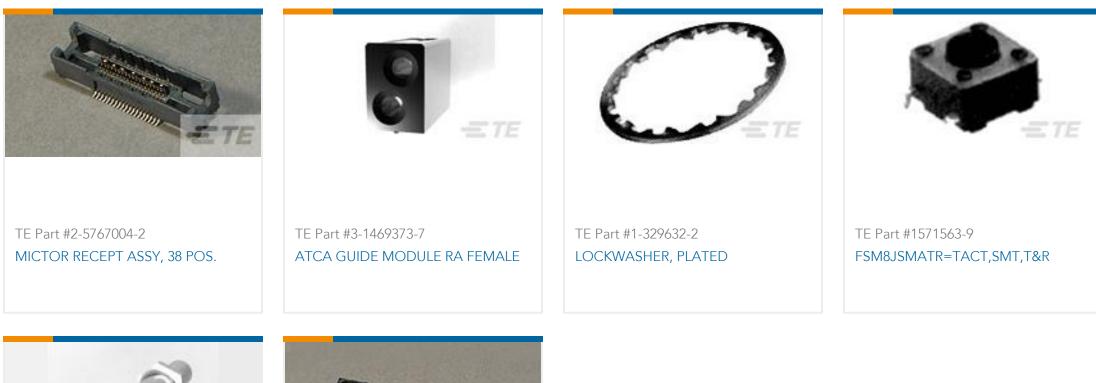



# Documents

Product Drawings

TEST PLUG, RTANG, PCB, G

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_5415406-2\_O.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5415406-2\_O.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5415406-2\_O.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

F Series and G Series Connectors

English

Product Environmental Compliance TE Material Declaration

English