
5555140-6 - ACTIVE

TE Internal #: 5555140-6 RJ25 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ25 Connectors

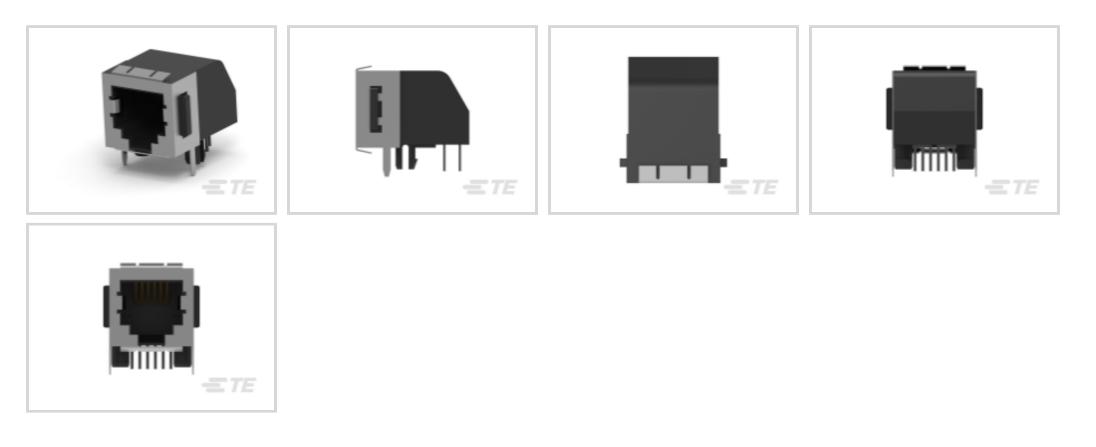

Port Configuration: Single Port
Port Matrix Configuration: 1 x 1
Connector Profile: Low
Modular Jacks & Plugs Products: RJ Type Jacks & Plugs
Connector Contact Density: Standard

Features

Product Type Features

Grounding Options	Panel Ground, PCB Ground		
Connector Product Type	Connector Assembly		
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs		
Modular Connector Style	Jack		
Connector System	Cable-to-Board		
Configuration Features			
Number of PCB Ground Tabs	2		
Port Configuration	Single Port		
Port Matrix Configuration	1 × 1		
Connector Contact Density	Standard		
PCB Mount Orientation	Right Angle		
Number of Positions	6		
Number of Loaded Positions	6		
Body Features			

RJ25 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle



PCB Ground Tab Location	3.05 mm[.12 in]
Shield Plating Material	Tin
Shield Material	Copper Alloy
Connector Profile	Low
Modular Jack Latch Orientation	Standard - Latch Down
Contact Features	
	50 µin
Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	.2 A, 1.5 A
PCB Contact Termination Area Plating Material	Tin
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post & Tail Length	3.8 mm[.15 in]
Mechanical Attachment	
Panel Mount Feature Type	Panel Stops
Mating Alignment	Without
Connector Mounting Type	Board Mount, Panel Mount
Panel Mount Feature	With
Housing Features	
Mating Entry Location	Side
Housing Color	Black
Housing Material	PBT
Centerline (Pitch)	1.27 mm[.05 in]
Dimensions	
Connector Height	12.7 mm[.5 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Shielded	Yes
	00/21/2022 00.1

RJ25 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle



Circuit Application	Signal		
ndustry Standards			
Performance Category	Cat 3		
UL Flammability Rating	UL 94V-0		
Packaging Features			
Packaging Method	Box & Tube, Tube		
Packaging Quantity	35		
For compliance documentation, visit the product page on TE.com>			
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant		
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant Compliant		
EU RoHS Directive 2011/65/EU			
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant		

ppm.

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ25 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle






Customers Also Bought



	R / I I	U D1	70 1	
\sim	1120		.0 1	

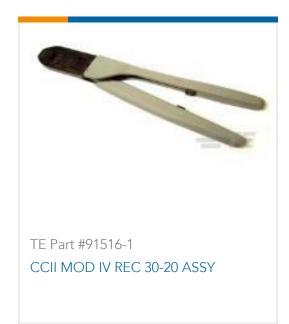

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_5555140-6_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5555140-6_E.3d_igs.zip

English

RJ25 Connectors, Single Port, 1 x 1, Low Profile, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Standard - Latch Down, Right Angle



Customer View Model ENG_CVM_CVM_5555140-6_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English