


TE Internal #: 55825-1

Splices, Butt Splice, 16 – 14 AWG Wire Size, 1.25 – 2 mm² Wire Size, Sealable, .19 in [4.83 mm] Barrel Inside Diameter, 2050 – 5180 CMA Wire Size

View on TE.com >

Terminals & Splices > Splices

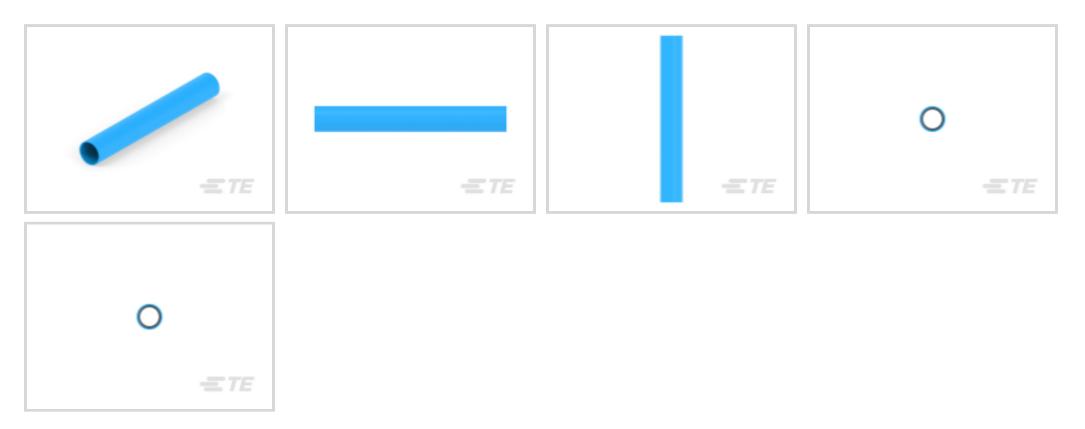

Wire Size: **1.25 – 2 mm²**

Sealable: Yes

Compatible Insulation Diameter Range: 4.83 mm [.19 in]

Barrel Inside Diameter: 4.83 mm [.19 in]

Features

Product Type Features



Sealable	Yes
Splice Type	Butt Splice
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	1.149 g
Insulation Material	Polyolefin
Primary Product Color	Blue
Contact Features	
Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	

55825-1

Splices, Butt Splice, 16 – 14 AWG Wire Size, 1.25 – 2 mm² Wire Size, Sealable, .19 in [4.83 mm] Barrel Inside Diameter, 2050 – 5180 CMA Wire Size



Wire Insulation Support	With	
Dimensions		
Wire Size	2050 – 5180 CMA	
Compatible Insulation Diameter Range	4.83 mm[.19 in]	
Barrel Inside Diameter	4.83 mm[.19 in]	
Product Length	40.79 mm[1.606 in]	
Usage Conditions		
Insulation Option	Fully Insulated	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Industry Standards		
Government Qualified Splice	No	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Loose Piece	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Saldar Pracasa Capability	Not applicable for colder process capability

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

55825-1

Splices, Butt Splice, 16 – 14 AWG Wire Size, 1.25 – 2 mm² Wire Size, Sealable, .19 in [4.83 mm] Barrel Inside Diameter, 2050 – 5180 CMA Wire Size



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought



	Contraction of the second seco	도도 문 부수수수수수 부수수수수수 부수수수수수	
= TE			-E TE
TE Part #11031263-00 SDT1-028K	TE Part #2-320553-2 PIDG R 22-16 COMM 22-18 MIL 4	TE Part #2-1703639-1 12POS,AMP MCP1.5K,REC HSG,ASSY	TE Part #T4171230012-001 M12,FRONT MOUNT,MALE, A,12P, 0.2 M WIRE



Documents

Product Drawings 16-14 PRE-INSUL SEALED SPLICE

English

55825-1

Splices, Butt Splice, 16 – 14 AWG Wire Size, 1.25 – 2 mm² Wire Size, Sealable, .19 in [4.83 mm] Barrel Inside Diameter, 2050 – 5180 CMA Wire Size



CAD Files

Customer View Model ENG_CVM_CVM_55825-1_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_55825-1_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_55825-1_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance TE Material Declaration

English

Instruction Sheets Instruction Sheet (U.S.) English