


Z-PACK | Z-PACK 2mm HM

TE Internal #: 5646492-1 Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb /s, 11 Column, 8 Row, Mezzanine, 88 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm

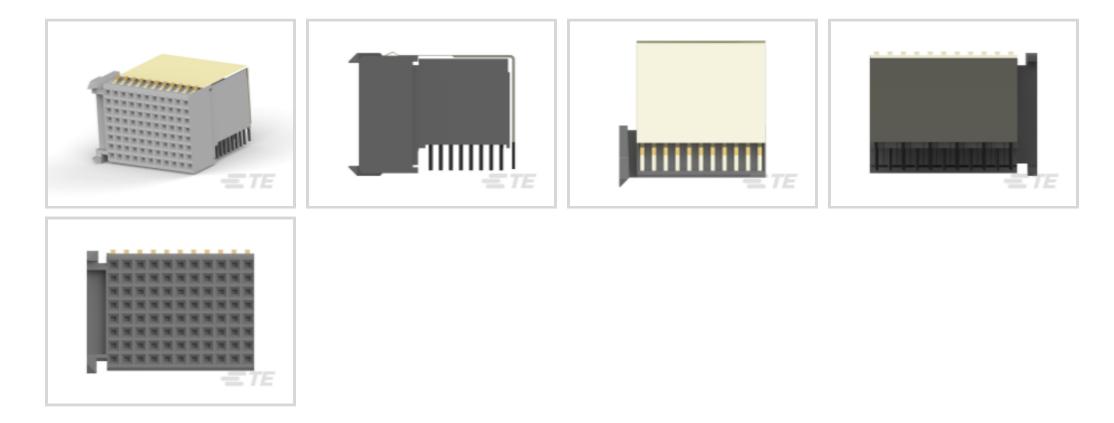

PCB Connector Assembly Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s**

Number of Columns: 11

Number of Rows: 8

Backplane Architecture: Mezzanine

All HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm (48)



Features

Product Type Features

Ground Feature Type	Ground Return Shielding		
Backplane Interface Type	2mm HM		
PCB Connector Assembly Type	PCB Mount Receptacle		
Connector System	Board-to-Board		
Sealable	No		
Connector & Contact Terminates To	Printed Circuit Board		
Configuration Features			
Configuration Features Rows Loaded	A, B, C, D, E, F, G, H		
	A, B, C, D, E, F, G, H 88		
Rows Loaded			
Rows Loaded Number of Signal Positions	88		

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 11 Column, 8 Row, Mezzanine, 88 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Number of Positions	88
PCB Mount Orientation	Right Angle
Signal Characteristics	
Crosstalk Version	Standard
Data Rate	≤1 Gb/s
Body Features	
Primary Product Color	Gray
Contact Features	
Feedthrough Post Length	3.3 mm
CompactPCI Designation	None
Contact Type	Socket
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Performance Based
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Current Rating (Max)	1.5 A

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment Type	Multi-Purpose Center
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Backplane Module Length	25 mm
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	Yes

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 11 Column, 8 Row, Mezzanine, 88 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Circuit Application	Application Signal			
Industry Standards				
UL Flammability Rating	UL 94V-0			
Packaging Features				
Packaging Quantity	20			
Packaging Method	Tube			
EU RoHS Directive 2011/65/EU	Compliant			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU ELV Directive 2000/53/EC	Compliant			
	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006	•			
	No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 11 Column, 8 Row, Mezzanine, 88 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM






TE Part # CAT-472-Z12 Hard Metric Male Connector: Traditional Backplane, Mezzanine, 2mm

Also in the Series Z-PACK 2mm HM



Board-to-Board Connector Contacts(2)	Connector Caps & Covers(62)	Hard Metric Backplane Connectors	High Speed Backplane Connectors(1)	
		(269)		

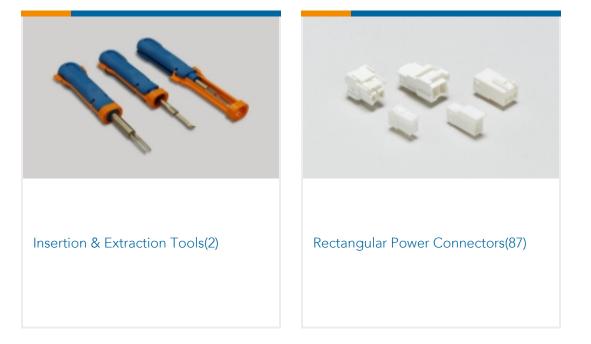

Customers Also Bought



Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 11 Column, 8 Row, Mezzanine, 88 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM





Documents

Product Drawings 2MM HM, ASY, T-F, REC, TT/PRE-SHLD

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_5646492-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_5646492-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_5646492-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance

TE Material Declaration

English