5767055-4 ACTIVE

MICTOR

TE Internal #: 5767055-4

PCB Mount Header, Straddle Mount, Board-to-Board, 152 Position,


.64 mm [.025 in] Centerline, Gold Flash over Palladium Nickel,

Surface Mount, Signal

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles

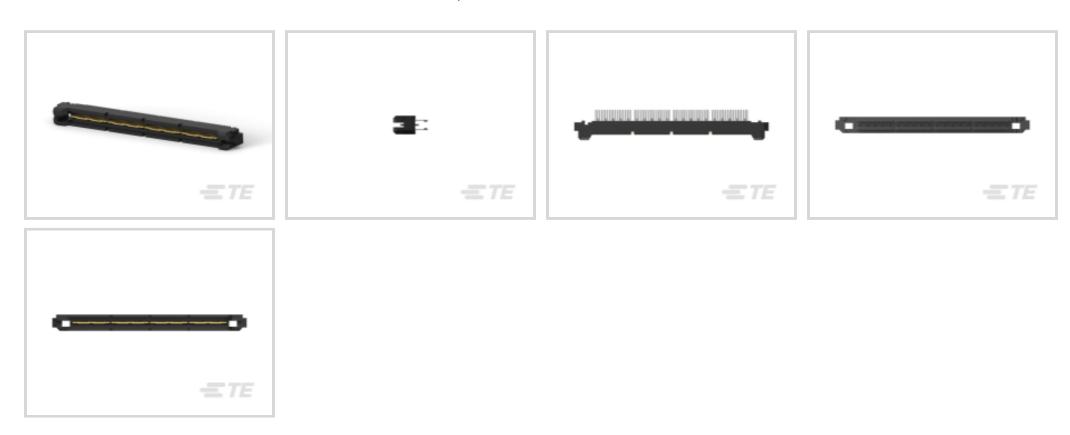

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Straddle Mount

Connector System: Board-to-Board

Number of Positions: 152

Centerline (Pitch): .64 mm [.025 in]

Features

Product Type Features

Ground Feature Type	Ground Bus
PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Power Positions	4
Number of Columns	76
Stackable	No
Number of Signal Positions	152
PCB Mount Orientation	Straddle Mount
Number of Positions	152
Board-to-Board Configuration	Parallel



	F00 \
Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 MΩ
Impedance	50 Ω
Operating Voltage	30 VAC
Signal Characteristics	
Differential Signaling	Yes
Data Rate	10 Gb/s
Body Features	
Primary Product Color	Black
Contact Features	
Contact Mating Area Length	.94 mm[.037 in]
PCB Contact Termination Area Plating Material Thickness	3.81 – 6.35 μm[149.9997 – 249.9995 μin]
Contact Layout	Inline
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Mating Area Plating Material Thickness	.127 μm[4.99999 μin]
Contact Type	Tab
Contact Current Rating (Max)	11.5 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.53 mm[.021 in]
Termination Post & Tail Length	3.48 mm[.137 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
PCB Mount Alignment Type	Locating Posts
Mating Retention	With
Mating Alignment	Without
PCB Mount Retention	With



PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Housing Features	
Mating Entry Location	Тор
Centerline (Pitch)	.64 mm[.025 in]
Housing Material	Matte
Dimensions	
Connector Length	63.45 mm[2.498 in]
Connector Height	6.38 mm[.251 in]
Connector Width	5.28 mm[.208 in]
PCB Thickness (Recommended)	2.36 mm[.13 in]
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Rating	Listed
Agency/Standard	CSA, UL
Approved Standards	CSA 1195944, UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	8
Packaging Type	Box, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)



Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC
	Free

Solder Process Capability


Reflow solder capable to 260°C

TE Part # 5767081-4

MICT,REC,152,ASY,PDNI,BARBLESS

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

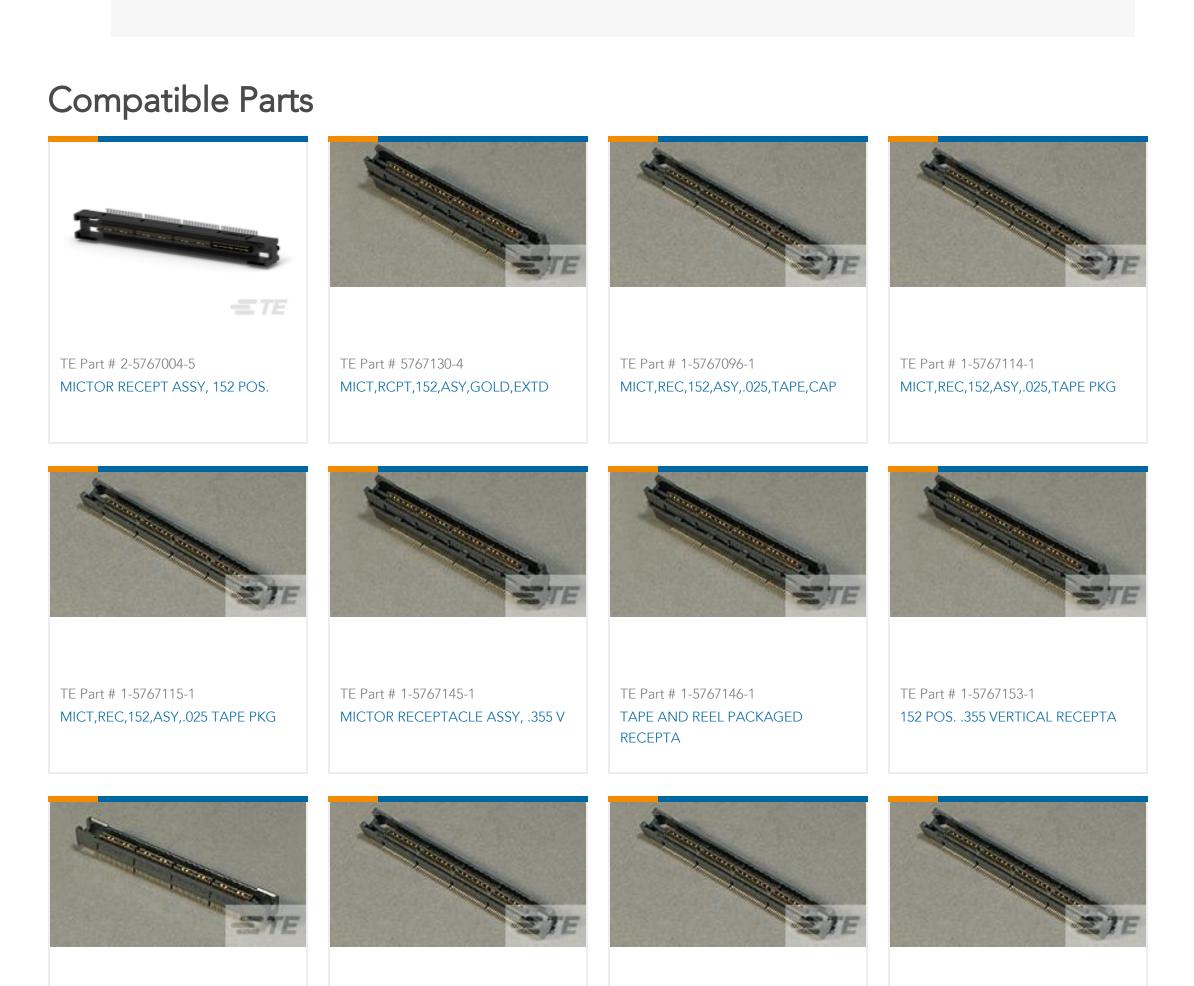

TE Part # 5767061-4

MICT,RECPT,152,ASSY,093,PDNI

TE Part # 5767044-4

MICTOR,R/A,RECPT,.062,152,ASY

TE Part # 5767054-4

MICT,RECPT,152,ASSY,PDNI





TE Part # 5767089-4 MICTOR,R/A,RECPT,.093,152,ASY



TE Part # 5767094-4
MICT,RECPT,152,ASY,PDNI,EXTD



TE Part # 5767095-4 MICT,REC,EXT,152,ASY,PDNI,025



TE Part # 5767096-4 MICT,REC,152,ASY,.025,TAPE PKG



TE Part # 5767110-4 MICT,RECPT,152,ASSY,.025



TE Part # 5767114-4 MICT,REC,152,ASY,.025,TAPE,CAP



TE Part # 5767115-4 MICT,REC,152,ASY,.025 TAPE PKG




TE Part # 5767143-4 MICT,R/A,RCPT,152,ASY,062,30AU

Customers Also Bought



TE Part #5767056-1 MICT,260,PLUG,38,ASSY,PDNI



TE Part #7-534998-0 40 MODIV VRT DR CE 100/125



TE Part #31089 BUDG R 22-16 COMM 22-18 MIL 4



TE Part #5767006-4 MICT,R/APLUG,152,ASY,.025,.062

Documents

Product Drawings

MICT,R/APLUG,ASSY,152,PDNI

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_5767055-4_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_5767055-4_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_5767055-4_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

PCB Mount Header, Straddle Mount, Board-to-Board, 152 Position, .64 mm [.025 in] Centerline, Gold Flash over Palladium Nickel, Surface Mount, Signal



Datasheets & Catalog Pages

MICTOR Interconnection System

English

Fine Pitch Stacking Connectors - 0.635mm MICTOR Connectors

English

Product Specifications

Application Specification

English