5787745-1 - ACTIVE

TE Internal #: 5787745-1 USB Connectors, A, 2.0, Standard Profile, Receptacle, 2 Port, Top, Right Angle, Tray / Box & Tray, Through Hole - Solder, Cable-to-Board, 1500

View on TE.com >

Connectors > Audio & Video Connectors > USB Connectors



USB Adapter Type: A

USB Version: 2.0

Connector Profile: Standard

Connector & Housing Type: Receptacle

Number of Ports: 2

Features

Product Type Features



Grounding Options	Panel Ground			
Ground Feature Type	Ground Finger			
USB Adapter Type	A			
USB Version	2.0			
Connector & Housing Type	Receptacle			
Connector System	Cable-to-Board			
Connector & Contact Terminates To	Printed Circuit Board			
USB Connector Type	USB 2.0 Type-A			
Configuration Features				
Panel Ground Location	Between Ports			
Number of Ports	2			
Number of Positions	8			
Body Features				
Shell Plating Finish	Bright			

USB Connectors, A, 2.0, Standard Profile, Receptacle, 2 Port, Top, Right Angle, Tray / Box & Tray, Through Hole - Solder, Cable-to-Board, 1500



Shell Plating Material	Tin
Connector Profile	Standard
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
Contact Current Rating (Max)	1 A
Termination Features	
Termination Post & Tail Length	2.84 mm[.112 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Locking Feature	With
PCB Mount Location	Тор
PCB Mount Retention Type	Kinked Legs
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Housing Color	Black
Body Orientation	Right Angle
Centerline (Pitch)	2 mm, 2.5 mm[.078 in][.098 in]
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Soldering Temperature (Max)	245 °C[500 °F]
Mating Cycles (Max)	1500
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Industry Standard	USB 2.0
Packaging Features	
Packaging Quantity	88

USB Connectors, A, 2.0, Standard Profile, Receptacle, 2 Port, Top, Right Angle, Tray / Box & Tray, Through Hole - Solder, Cable-to-Board, 1500



Packaging Method

Box & Tray, Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Wave solder capable to 240°C	

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



USB Connectors, A, 2.0, Standard Profile, Receptacle, 2 Port, Top, Right Angle, Tray / Box & Tray, Through Hole - Solder, Cable-to-Board, 1500



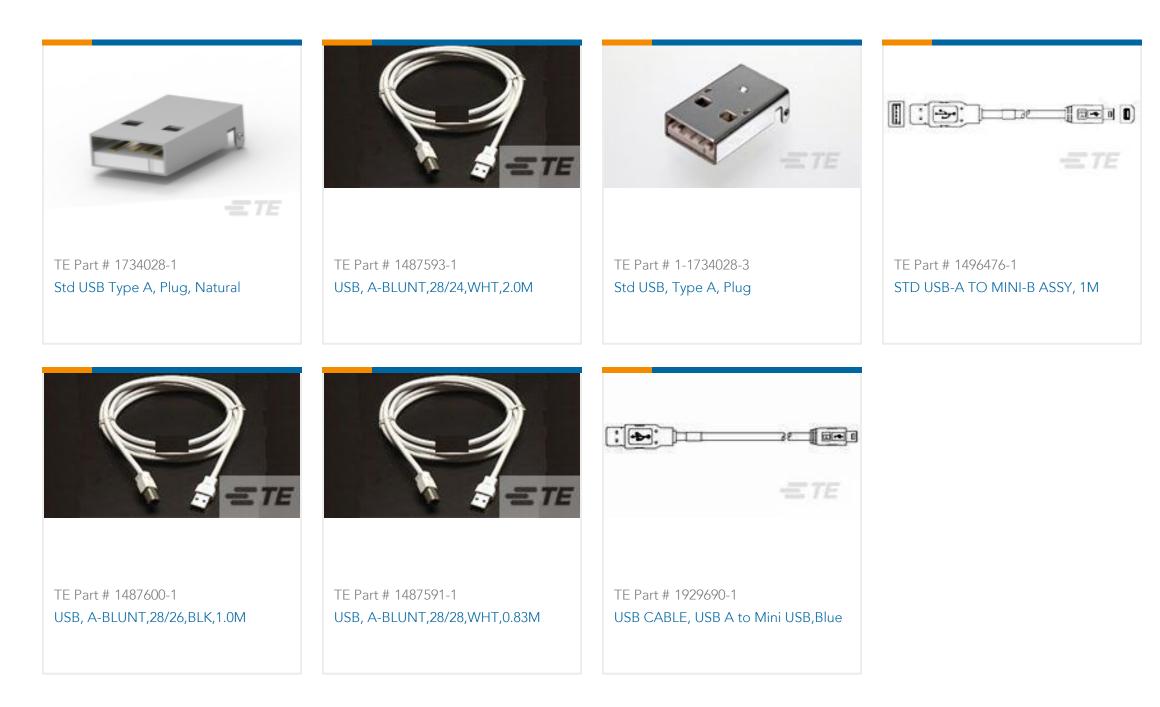

Customers Also Bought



0.8FH,R17H.5,040,08/Sn,TR,SC	M.2 0.5PITCH 4.2H KEY A 15U'' AU	MICRO-MATCH SMD FTE	DDR4 DIMM 288 PIN TH TYPE
TE STE	ETE		
TE Part #1623722-2 SBCH 11 1R5 5%	TE Part #292304-2 STD USB TYPE B, R/A, T/H	TE Part #6450123-3 MBXL R/A HDR 3ACP+0P	TE Part #203501-E MJIM IMV 1X1 * * * * * THRU * * H3D02 *



Documents

USB Connectors, A, 2.0, Standard Profile, Receptacle, 2 Port, Top, Right Angle, Tray / Box & Tray, Through Hole - Solder, Cable-to-Board, 1500



Product Drawings USB A R/A STAK ASSY THRU HOLE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5787745-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5787745-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5787745-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance MD_5787745-1_06222015737_dmtec

English

MD_5787745-1_06222015737_dmtec

English