


#### AMP | AMP Twin-Leaf

TE Internal #: 583853-2 Connector Contact, Socket, Wire-to-Board, 24 – 20 AWG Wire Size, 404 – 1020 CMA Wire Size, .2 – .6 mm² Wire Size, Gold, Strip, AMP Twin-Leaf

#### View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Contacts



## Contact Type: Socket Connector System: Wire-to-Board Centerline (Pitch): 2.54 mm, 3.18 mm, 3.96 mm [ .156 in ] Wire Size: 404 – 1020 CMA

### Features

## Product Type Features

Connector System

Connector & Contact Terminates To

#### **Contact Features**

Contact Retention Within Housing

Wire-to-Board

Wire & Cable

With

	15 µin
Wire Contact Termination Area Plating Material	Tin-Lead
PCB Contact Termination Area Plating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Type	Socket
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	5 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Contact Retention Type Within Housing	Locking Lance
Housing Features	
Centerline (Pitch)	2.54 mm, 3.18 mm, 3.96 mm[.156 in]
Dimensions	

**C** For support call+1 800 522 6752

#### 583853-2

Connector Contact, Socket, Wire-to-Board, 24 – 20 AWG Wire Size, 404 – 1020 CMA Wire Size, .2 – .6 mm<sup>2</sup> Wire Size, Gold, Strip, AMP Twin-Leaf



Compatible Insulation Diameter Range	1.22 – 1.52 mm[.048 – .06 in]
Wire Size	.2 – .6 mm²
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Identification Marking	
Wire Range Color Code	Green
Packaging Features	
Packaging Quantity	7000
Packaging Method	Strip
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part)
	Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Restricted Materials Above Threshold

#### Product Compliance Disclaimer

China RoHS 2 Directive MIIT Order No 32, 2016

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

### 583853-2

Connector Contact, Socket, Wire-to-Board, 24 – 20 AWG Wire Size, 404 – 1020 CMA Wire Size, .2 – .6 mm² Wire Size, Gold, Strip, AMP Twin-Leaf




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


## **Compatible Parts**



# Also in the Series AMP Twin-Leaf

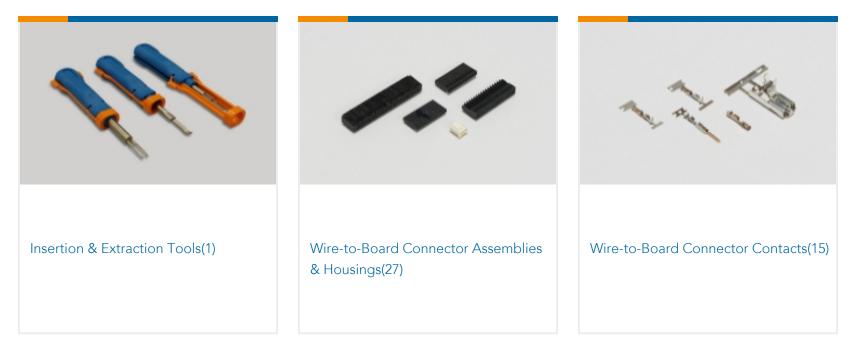

# Customers Also Bought

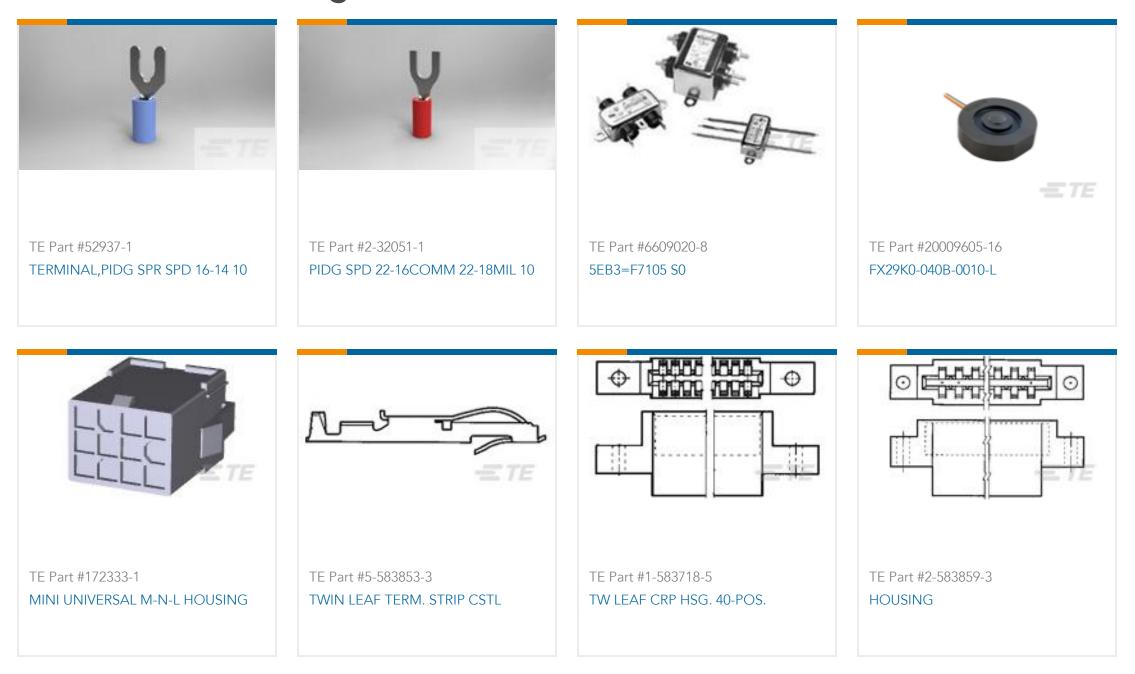

## Documents

**Product Drawings** CONT.CRP.SNAP TW.LF.STRIP

**C** For support call+1 800 522 6752

#### 583853-2

Connector Contact, Socket, Wire-to-Board, 24 – 20 AWG Wire Size, 404 – 1020 CMA Wire Size, .2 – .6 mm² Wire Size, Gold, Strip, AMP Twin-Leaf



English **CAD** Files 3D PDF 3D **Customer View Model** ENG\_CVM\_CVM\_583853-2\_BR.2d\_dxf.zip English **Customer View Model** ENG\_CVM\_CVM\_583853-2\_BR.3d\_igs.zip English **Customer View Model** ENG\_CVM\_CVM\_583853-2\_BR.3d\_stp.zip English Customer View Model ENG\_CVM\_583853-2\_V1.3d\_igs.zip English **Customer View Model** ENG\_CVM\_583853-2\_V1.3d\_stp.zip English 3D PDF English

Customer View Model ENG\_CVM\_583853-2\_V1.2d\_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English