

## Potter & Brumfield | Potter & Brumfield SSRC

TE Internal #: 6-1393030-1


Power Relays, Solid State, 1 Form A (SPST-NO), Printed Circuit

Board, Potter & Brumfield SSRC

View on TE.com >





Relays, Contactors & Switches > Relays > Power Relays > Solid State Relays, P&B SSRC Series

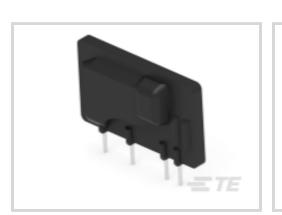





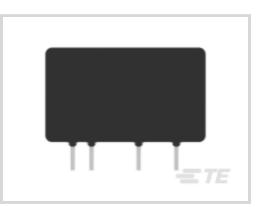

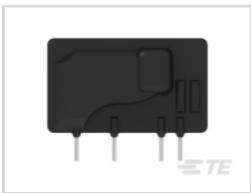

Power Relay Type: Solid State

Contact Arrangement: 1 Form A (SPST-NO)
Relay Mounting Type: Printed Circuit Board

All Solid State Relays, P&B SSRC Series (4)

## **Features**

# Product Type Features

Output Type	AC
Power Relay Type	Solid State
Configuration Features	
Output Switching	Random
Electrical Characteristics	
Input Voltage Typical	4 – 15 VDC
Output Voltage (Max)	660 V
Output Voltage Rating (AC Relays)	48 – 660 Vrms
Output Current Rating	.06 – 5 Arms
Output Voltage Rating (DC Relays)	48 – 660 VDC
Output Current (Min)	.06 A
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Body Features	

11 g[.4 oz]

Product Weight



Case Color	Black
Contact Features	
Switch Arrangement	1 Form A (SPST-NO)
Contact Arrangement	1 Form A (SPST-NO)
Termination Features	
Relay Termination Type	Printed Circuit Terminals
Mechanical Attachment	
Coupling	Optical
Relay Mounting Type	Printed Circuit Board
Housing Features	
Relay Housing Style	SIP
Dimensions	
Dimensions (L x W x H) (Approximate)	43.1 x 7.6 x 25.4 mm[1.7 x .3 x 1 in]
Usage Conditions	
Operating Temperature Range	-30 – 80 °C
Operation/Application	

# **Product Compliance**

R-Switch & slimSSR Relays

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts





# Also in the Series | Potter & Brumfield SSRC

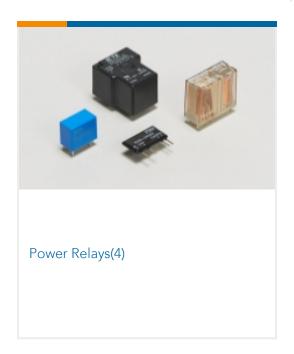

# **Customers Also Bought**

















## **Documents**

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_6-1393030-1\_A1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_6-1393030-1\_A1.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_6-1393030-1\_A1.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

Solid State Relay SSRC Series Data Sheet

English

SSRC\_Datasheet

English

## Agency Approvals

UL

English