


Potter & Brumfield | Potter & Brumfield W6

TE Internal #: 6-1393252-2 Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 5A Current Rating, 1 Pole, Potter & Brumfield W6

View on TE.com >

Relays, Contactors & Switches > Circuit Breakers

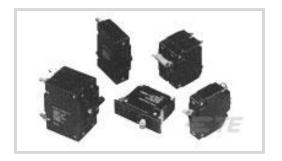

Circuit Breaker Type: Magnetic

Circuit Function: Series Trip

Illuminated: No

Actuator Color: White

Operating Voltage: 240 VAC, 415 VAC

Features

Product Type Features

Illumination Type	No Light
Actuator Type	Toggle
Terminal Configuration	6.35 [.25] Straight Quick Connect Tab



Circuit Breaker Type	Magnetic
Illuminated	No
Configuration Features	
	.75 x 1.66 in
Circuit Function	Series Trip
Number of Poles	1
Electrical Characteristics	
Operating Voltage	240 VAC, 415 VAC
Current Rating	5 A
Interrupt Capacity	5000A @ 277VAC
Body Features	
Actuator Color	White
Contact Features	
Trip Time at 200%	2.2 – 20 seconds
Mechanical Attachment	

W67-X2Q12-5

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 5A Current Rating, 1 Pole, Potter & Brumfield W6



Mounting Options	6-32 Mounting Threads
Dimensions	
	.047 – .11 in
Product Height	50.8 mm[2 in]
dentification Marking	
Stamped Marking Type	International I/O
EU RoHS Directive 2011/65/EU	
EU RoHS Directive 2011/65/EU	
	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant Not Compliant
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

W67-X2Q12-5

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 5A Current Rating, 1 Pole, Potter & Brumfield W6






TE Part # 7-1393252-9 W67-X2Q50-5=M6/M7/M9/W6/W7



Also in the Series | Potter & Brumfield W6



Customers Also Bought

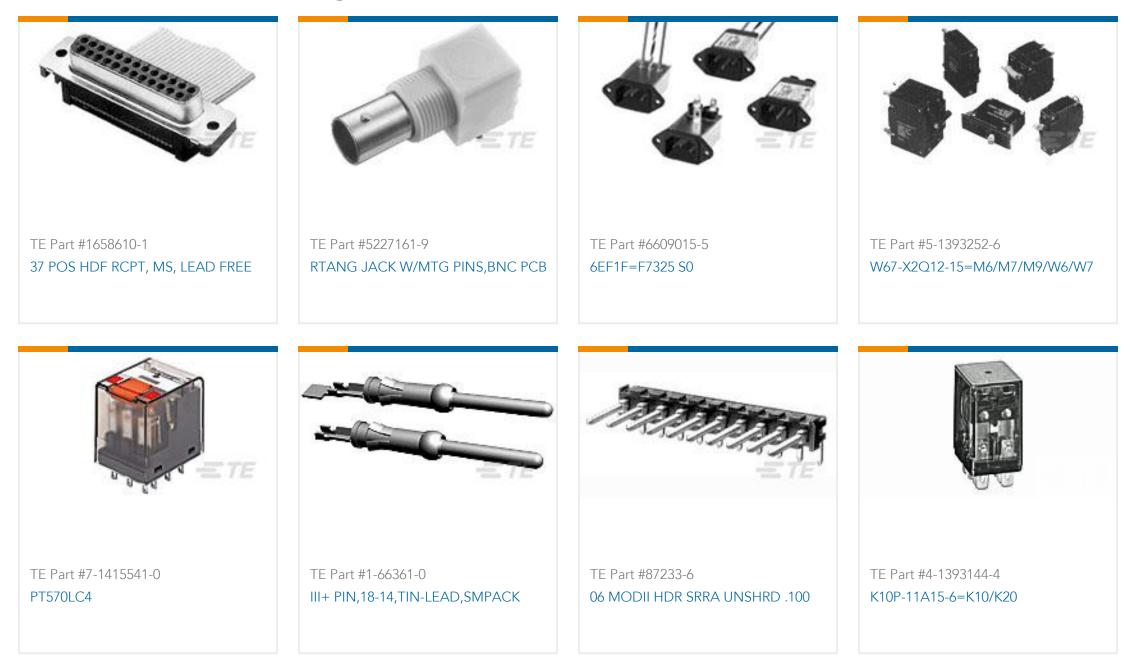

W67-X2Q12-5

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 5A Current Rating, 1 Pole, Potter & Brumfield W6





Documents

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_6-1393252-2_1106.3d_igs.zip

English

Customer View Model

ENG_CVM_6-1393252-2_1106.3d_stp.zip

English

Customer View Model

ENG_CVM_6-1393252-2_1106.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages W6/W9 Magnetic Hydraulic Circuit Breaker

English

Agency Approvals UL

English