R10-E1Y6-V90 <

Potter & Brumfield | Potter & Brumfield R10

TE Internal #: 6-1393766-3 Power Relays, Industrial Panel Plug-In, Monostable, DC, 1600 mW Coil Power Rating DC, 90 Ω Coil Resistance, Sensitive Version, Potter & Brumfield R10

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: Industrial Panel Plug-In

Coil Magnetic System: Monostable, DC

Coil Power Rating DC: 1600 mW

Coil Resistance: 90 Ω

Coil Special Features: Sensitive Version

Features

Product Type Features

Power Relay Type

Industrial Panel Plug-In

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class



500 - 1000 V

Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
Actuating System	DC
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Making Current	3 A
Contact Limiting Short-Time Current	3 A
Contact Limiting Continuous Current	3 A
Coil Power Rating Class	1500 mW
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Resistance	10000 MΩ
Contact Limiting Breaking Current	3 A
Coil Magnetic System	Monostable, DC
Coil Power Rating DC	1600 mW
Coil Resistance	90 Ω
Coil Special Features	Sensitive Version
Coil Voltage Rating	12 VDC

C For support call+1 800 522 6752

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1600 mW Coil Power Rating DC, 90 Ω Coil Resistance, Sensitive Version, Potter & Brumfield R10



Contact Switching Load (Min)	100mA @ 12V
Contact Voltage Rating	120 VAC
Body Features	
Product Weight	40 g[1.41 oz]
Contact Features	
Contact Arrangement	6 Form C (CO)
Contact Current Class	2 – 5 A, 16 A
Contact Current Rating (Max)	3 A
Contact Material	Ag
Contact Number of Poles	6
Relay Terminal Type	Plug-In, Solder
Mechanical Attachment	
Relay Mounting Type	Socket
Dimensions	
Length Class (Mechanical)	25 – 30 mm
Height Class (Mechanical)	30 – 40 mm
Width Class (Mechanical)	16 – 20 mm
Product Width	18.7 mm[.736 in]
Product Length	29.6 mm[1.165 in]
Product Height	30.2 mm[1.189 in]
Usage Conditions	
Environmental Ambient Temperature Class	70–85 °C
Environmental Ambient Temperature (Max)	75 °C[167 °F]
Operating Temperature Range	-55 – 75 °C
Packaging Features	
Packaging Method	Package
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1600 mW Coil Power Rating DC, 90 Ω Coil Resistance, Sensitive Version, Potter & Brumfield R10




EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (3.7% in Component part) Aticle Safe Usage Statements! Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

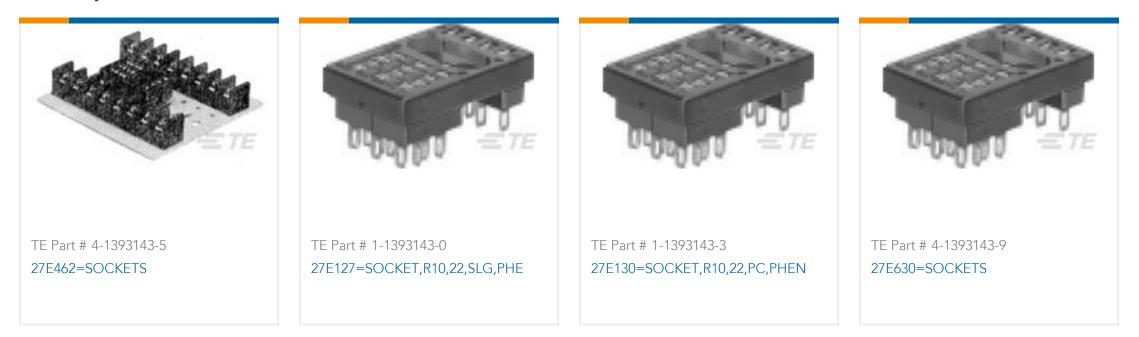



Also in the Series | Potter & Brumfield R10

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1600 mW Coil Power Rating DC, 90 Ω Coil Resistance, Sensitive Version, Potter & Brumfield R10





Customers Also Bought



TE Part #YDIV44E13-35SNV001 RECP ASSY	TE Part #YDIV46E17-26SNV001 PLUG ASSY	TE Part #932425N002 S02-08-R-6CS816	TE Part #467908N003 S02-08-R-9CS816
	A A A A A A A A A A A A A A A A A A A		
TE Part #227540N002 S02-10-R-4CS816	TE Part #6155350003 S02-07-R-6CS816		

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1393766-3_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1393766-3_B.3d_igs.zip

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1600 mW Coil Power Rating DC, 90 Ω Coil Resistance, Sensitive Version, Potter & Brumfield R10



English

Customer View Model ENG_CVM_CVM_6-1393766-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages R10 General Purpose Dry Circuit to 7.5 Amp Multicontact AC or DC Relay

English

Product Specifications Definitions General Purpose Relays English

Agency Approvals CSA Certificate

English