6-1474654-0 <

TE Internal #: 6-1474654-0 Wire-to-Board Jumpers & Shunts, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Length 101.6 mm [4 in], Printed Circuit Board, Power & Signal

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Jumpers & Shunts



Connector System: Wire-to-Board

Number of Positions: 12

Centerline (Pitch): 2.54 mm [.1 in]

Product Length: 101.6 mm [4 in]

Connector & Contact Terminates To: Printed Circuit Board

Features

Product Type Features

Compatible With Discrete Wire Type	Solid	
Connector System	Wire-to-Board	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Conductors	12	
Number of Rows	1	
Number of Positions	12	
Electrical Characteristics		
Impedance	117 Ω	
Operating Voltage	300 VAC	
Body Features		
Jumper Insulation Material	Nomex	
Contact Features		
Pin Arrangement (Left)	A	

C For support call+1 800 522 6752

6-1474654-0

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Length 101.6 mm [4 in], Printed Circuit Board, Power & Signal



Pin Arrangement (Right)	A
Contact Current Rating (Max)	3 A
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Wire Size	.25 mm ²
Product Length	101.6 mm[4 in]
Usage Conditions	
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Calden Dragen Caracle iliter	

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

6-1474654-0

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Length 101.6 mm [4 in], Printed Circuit Board, Power & Signal










Customers Also Bought



TE Part #1-1614782-2	TE Part #640457-4	TE Part #350430-1	TE Part #350760-4
BDS 2 A 100 33R 10%	04P MTA100 HDR ASSY SQ R/A F/L	04P UMNL PIN HDR ASSY NATL	03P UMNL HDR ASSY PC
	=TE	IDUH BER DER ETE	mmmm = TE
TE Part #5556416-1	TE Part #4-1614884-5	TE Part #4-2176339-2	TE Part #3-1474644-8
MJ,TE,8P	CPF 0805 150R 0.1% 25PPM 1K RL	CRGCQ 0603 27K 1%	FSN-24A-14

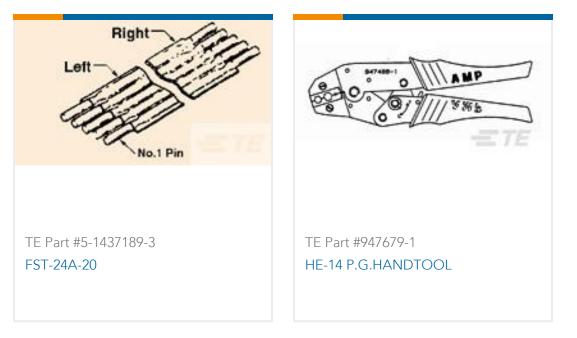

6-1474654-0

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Length 101.6 mm [4 in], Printed Circuit Board, Power & Signal



DocumentsProduct DrawingsFSN-24A-12EnglishProduct SpecificationsProduct SpecificationEnglishAgency ApprovalsUL ReportEnglish