36501J4N3JTDG V ACTIVE

Sigma | Sigma 3650

TE Internal #: 6-1624112-5

.0043 $\mu\text{H}\text{, High Frequency Inductor, 700 mA, .063 }\Omega$ DC Resistance,

Wire Wound, 0603, 5 %, 1.8 x 1.12 x 1.02 mm, Taped & Reeled,

Sigma 3650

View on TE.com >



Passive Components > Inductors > High Frequency & RF Inductors



Inductor Type: **High Frequency**

Termination Method to Printed Circuit Board: Surface Mount

Packaging Method: Taped & Reeled

Passive Component Dimensions: 1.8 x 1.12 x 1.02 mm

Passive Component Tolerance: 5%

Features

Product Type Features

Inductor Type	High Frequency
Element Type	Wire Wound
Package Size Code	0603
Electrical Characteristics	

Self Resonant Frequency	5.8 GHz
Passive Component Tolerance	5 %
Inductance	.0043 μΗ
Current Rating (Max)	700 mA
DC Resistance	.063 Ω

Termination Features

Dimensions

Passive Component Dimensions	1.8 x 1.12 x 1.02 mm
------------------------------	----------------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C

Packaging Features

Packaging Method	Taped & Reeled
· Grantary · · · g · · · · g · · · · g · · · · g · · · · g · · · · · g ·	



Other

Inductor Quality Factor	22
-------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts















Also in the Series | Sigma 3650

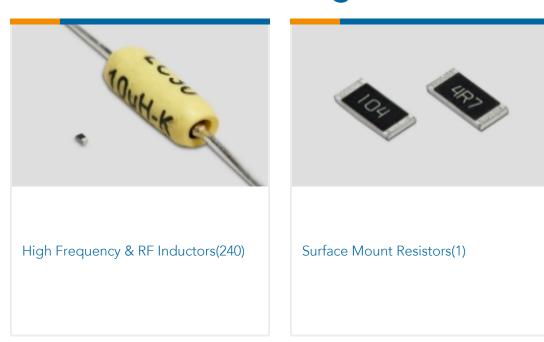

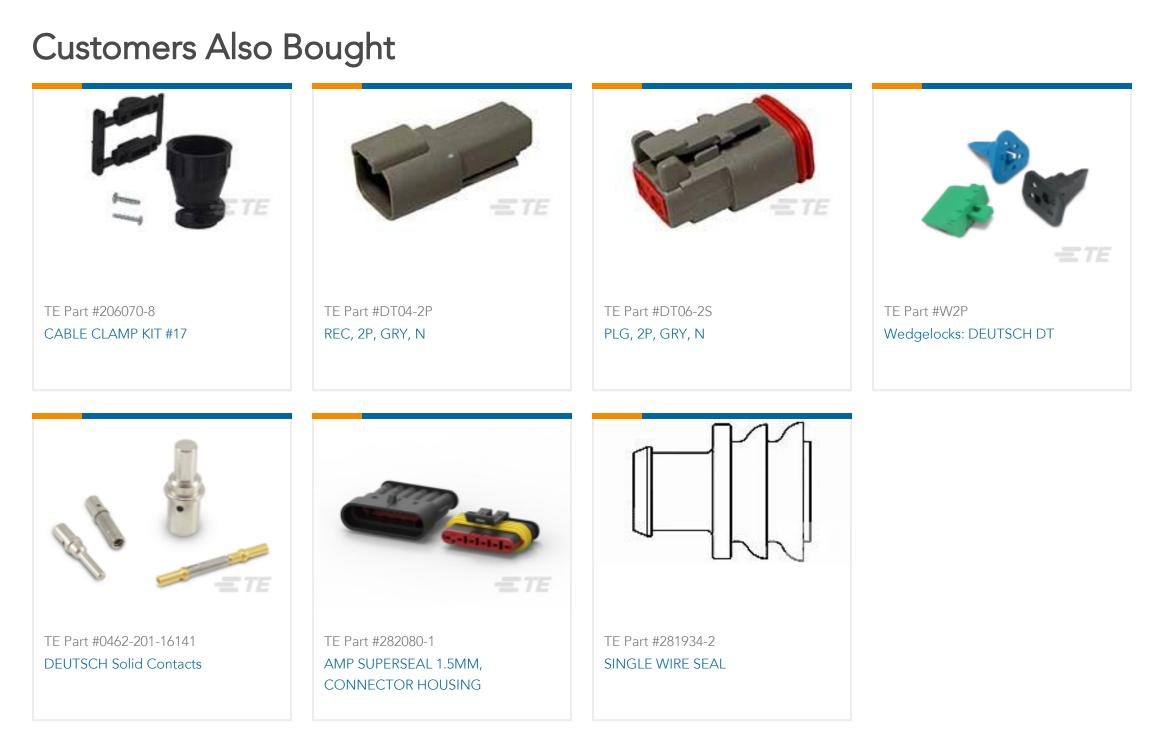

Documents

Product Drawings
3650 0603 4.3nH 5% 2K RL

English

CAD Files

3D PDF

3D

.0043 µH, High Frequency Inductor, 700 mA, .063 Ω DC Resistance, Wire Wound, 0603, 5 %, 1.8 x 1.12 x 1.02 mm, Taped & Reeled, Sigma 3650



Customer View Model

ENG_CVM_CVM_6-1624112-5_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1624112-5_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1624112-5_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1309350_PASSIVE_COMPONENT

English

Low Inductance, High Frequency Chip Inductors - Type 3650 Series

English