6-176146-6 - ACTIVE

AMP | Econoseal TE Internal #: 6-176146-6 Housing for Female Terminals, Wire-to-Wire, 2 Position, .311 in [7.9 mm] Centerline, Sealable, Gray, Signal, Cable Mount (Free-Hanging), Econoseal

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > ECONOSEAL, CONNECTOR HOUSING



Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 7.9 mm [.311 in]

Sealable: Yes

All ECONOSEAL, CONNECTOR HOUSING (108)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular



Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	13 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Gray
Contact Features	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .311 in [7.9 mm] Centerline, Sealable, Gray, Signal, Cable Mount (Free-Hanging), Econoseal



Contact Size	4.8mm
Contact Type	Receptacle
Mating Tab Width	4.8 mm[.189 in]
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarization Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT
Centerline (Pitch)	7.9 mm[.311 in]
Dimensions	
Connector Height	27.5 mm[1.083 in]
Product Width	27.6 mm[1.087 in]
Product Length	31.6 mm[1.244 in]
Usage Conditions	

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-2
Packaging Features	
Packaging Quantity	50
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Female Terminals, Wire-to-Wire, 2 Position, .311 in [7.9 mm] Centerline, Sealable, Gray, Signal, Cable Mount (Free-Hanging), Econoseal



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Econoseal

Housing for Female Terminals, Wire-to-Wire, 2 Position, .311 in [7.9 mm] Centerline, Sealable, Gray, Signal, Cable Mount (Free-Hanging), Econoseal



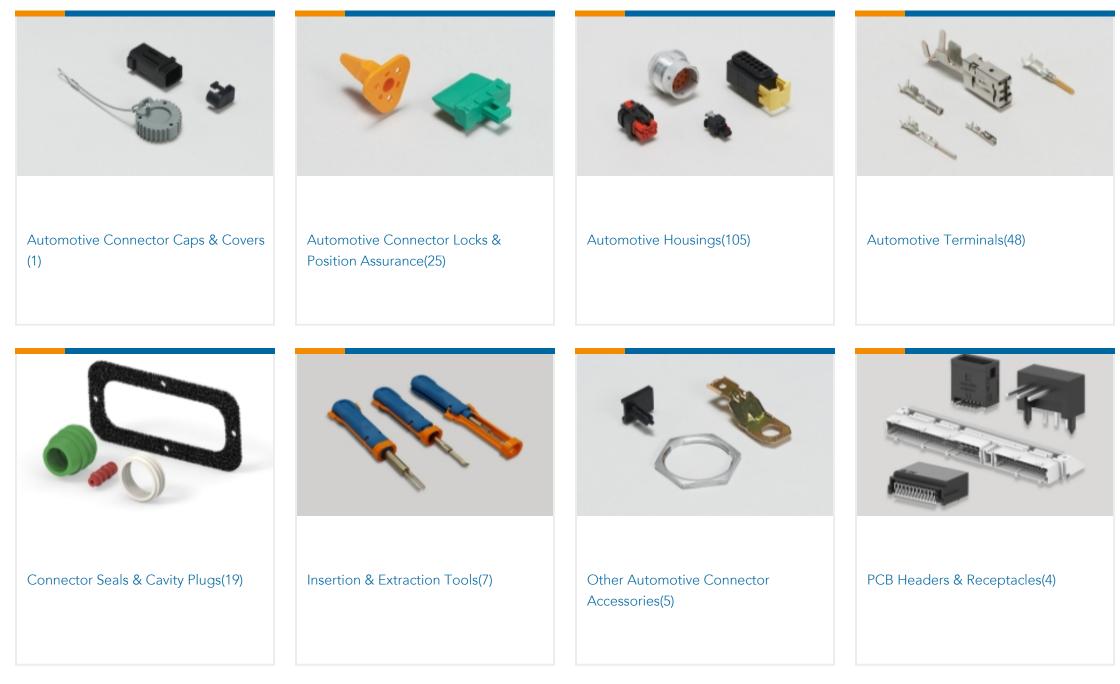



Primary Wire(1)

Customers Also Bought



Documents

Housing for Female Terminals, Wire-to-Wire, 2 Position, .311 in [7.9 mm] Centerline, Sealable, Gray, Signal, Cable Mount (Free-Hanging), Econoseal



Product Drawings .187 PLUG HSG ASSY 2P GRAY

English

CAD Files

Customer View Model

ENG_CVM_6-176146-6_E.3d_igs.zip

English

Customer View Model

ENG_CVM_6-176146-6_E.3d_stp.zip

English

Customer View Model

ENG_CVM_6-176146-6_E.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages Econoseal Connector Series

English

Product Specifications Application Specification

English

Crimping of 187 Series, Waterproof Contact

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets Instruction Sheet (non U.S.)

Japanese