


**GRACE INERTIA 2.5** TE Internal #: 6-1971793-4 Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Yellow, Mating Retention, Wire & Cable, GRACE **INERTIA 2.5** 

#### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

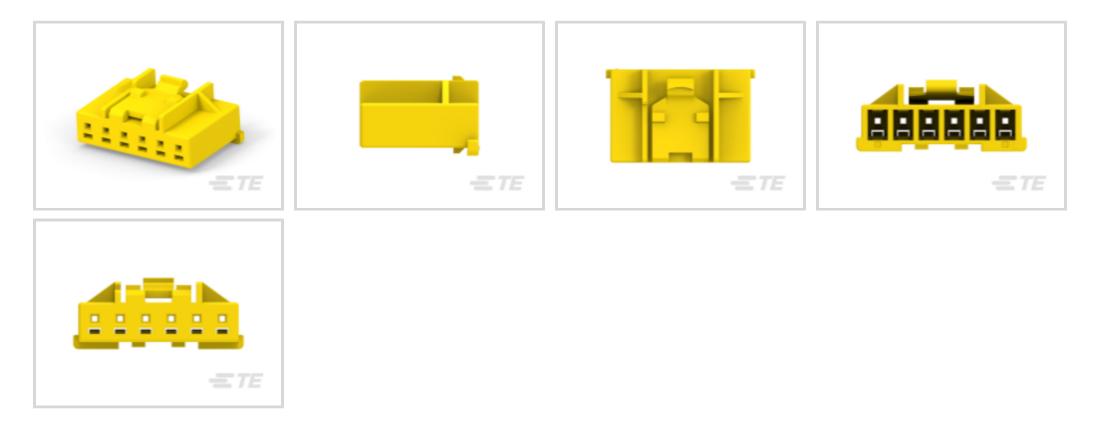

Glow Wire Sig GRACE INERTIA Plug

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 2.5 mm [.098 in]

All Glow Wire Sig GRACE INERTIA Plug (20)



### Features

### **Product Type Features**

Connector Product Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	6			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	50 VAC			
Body Features				

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Yellow, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



Connector & Keying Code	D
Primary Product Color	Yellow
Contact Features	
Contact Retention Within Housing	Without
Contact Layout	Inline
Contact Type	Tab
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

# Housing Features

Housing Entry Configuration	Both Ends Closed				
Housing Material	PA 66 GF				
Centerline (Pitch)	2.5 mm[.098 in]				
Dimensions					
Connector Length	15.7 mm[.618 in]				
Connector Height	5.88 mm[.231 in]				
Wire Size	.081 – .326 mm²				
Usage Conditions					
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]				
Operation/Application					
Circuit Application	Power & Signal				
Industry Standards					
Glow Wire Rating	Glow Wire				

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Yellow, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



### Packaging Features

Packaging Quantity	400
Packaging Method	Bag & Box
Other	
Discrete Wire Connector Comment	Mating with 6-1971798-X

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant No Restricted Materials Above Threshold			
China RoHS 2 Directive MIIT Order No 32, 2016				
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.			
Solder Process Capability	Not reviewed for solder process capability			

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Yellow, Mating Retention, Wire & Cable, GRACE INERTIA 2.5





# Also in the Series | GRACE INERTIA 2.5



Rectangular Connector Locking(2)	Rectangular Power Connectors(35)	Wire-to-Board Connector Assemblies	Wire-to-Board Connector Contacts(4)	
		& Housings(46)		

# Customers Also Bought



Housing, Plug, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Yellow, Mating Retention, Wire & Cable, GRACE INERTIA 2.5





## Documents

### Product Drawings NEW GI CONN2.5 PLUG HSG 6P YLW

English

#### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_6-1971793-4\_J.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_6-1971793-4\_J.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_6-1971793-4\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773465-3-GI2.5Flyer

English

7-1773465-8-GI2.5-ChineseFlyer

Product Specifications Application Specification

English