6-331693-2 - ACTIVE

AMP | AMP BNC TE Internal #: 6-331693-2 BNC RF Interface, Jack, 50 Ω, RG 188 / RG 174, Bayonet, 4 GHz Operating Frequency, 1 Position, Wire & Cable, Panel Mount, AMP BNC

View on TE.com >

Connectors > RF Connectors > Coax Connectors



RF Interface: **BNC** RF Connector Style: **Jack** RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]** Impedance: **50** Ω Compatible With RF Cable Type: **RG 174, RG 188**

Features

Product Type Features

| RF Interface | BNC |
|-------------------------------|----------------|
| RF Connector Style | Jack |
| Compatible With RF Cable Type | RG 174, RG 188 |



| Sealable | No |
|---|--------------|
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features | |
| Number of Positions | 1 |
| Number of Coaxial Contacts | 1 |
| Electrical Characteristics | |
| Impedance | 50 Ω |
| Body Features | |
| Cable Connector Orientation | Straight |
| Body Material | Brass |
| Body Material Finish | Plated |
| Body Plating Material | Silver |
| Contact Features | |
| RF Connector Center Contact Underplating Material | Nickel |
| Crimp Type | Dual |

C For support call+1 800 522 6752

6-331693-2

BNC RF Interface, Jack, 50 $\Omega,$ RG 188 / RG 174, Bayonet, 4 GHz Operating Frequency, 1 Position, Wire & Cable, Panel Mount, AMP BNC



| RF Connector Center Contact Plating Material | Gold |
|---|----------------------------|
| RF Connector Center Contact Material | Beryllium Copper |
| Termination Features | |
| Termination Method to Wire & Cable | Crimp |
| Mechanical Attachment | |
| Panel Attachment Style | Rear Mount |
| RF Connector Coupling Mechanism | Bayonet |
| Connector Mounting Type | Panel Mount |
| RF Contact Captivation Method | Mechanical |
| Dimensions | |
| RF Connector Mated Outer Diameter (Approximate) | 14.53 mm[.572 in] |
| Usage Conditions | |
| Insulation Option | Uninsulated |
| Operating Temperature Range | -65 – 165 °C[-85 – 329 °F] |
| Operation/Application | |
| Operating Frequency | 4 GHz |
| Packaging Fosturos | |

Packaging Features

| Packaging Method | Package |
|----------------------------|----------|
| Other | |
| Coupling Nut Base Material | Brass |
| Grade | Military |
| Dielectric Material | PTFE |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2019 (197) SVHC > Threshold: Pb (3.7% in base metal) |

6-331693-2

BNC RF Interface, Jack, 50 Ω, RG 188 / RG 174, Bayonet, 4 GHz Operating Frequency, 1 Position, Wire & Cable, Panel Mount, AMP BNC



Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series AMP BNC






Customers Also Bought

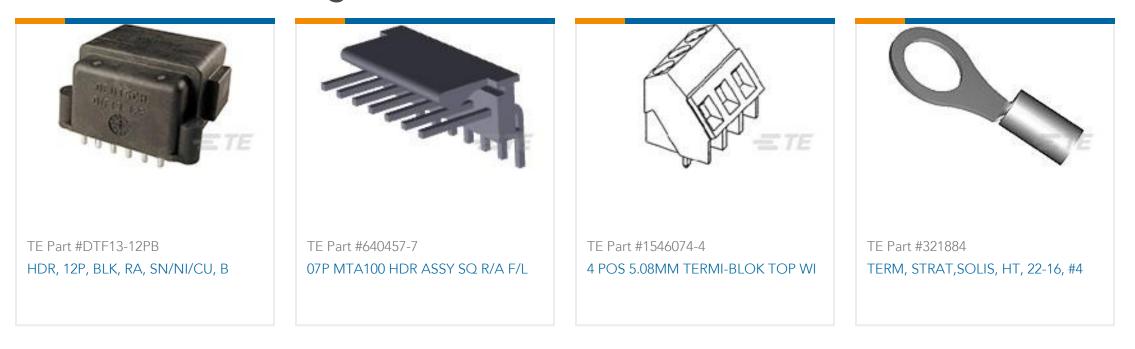

6-331693-2

BNC RF Interface, Jack, 50 Ω , RG 188 / RG 174, Bayonet, 4 GHz Operating Frequency, 1 Position, Wire & Cable, Panel Mount, AMP BNC



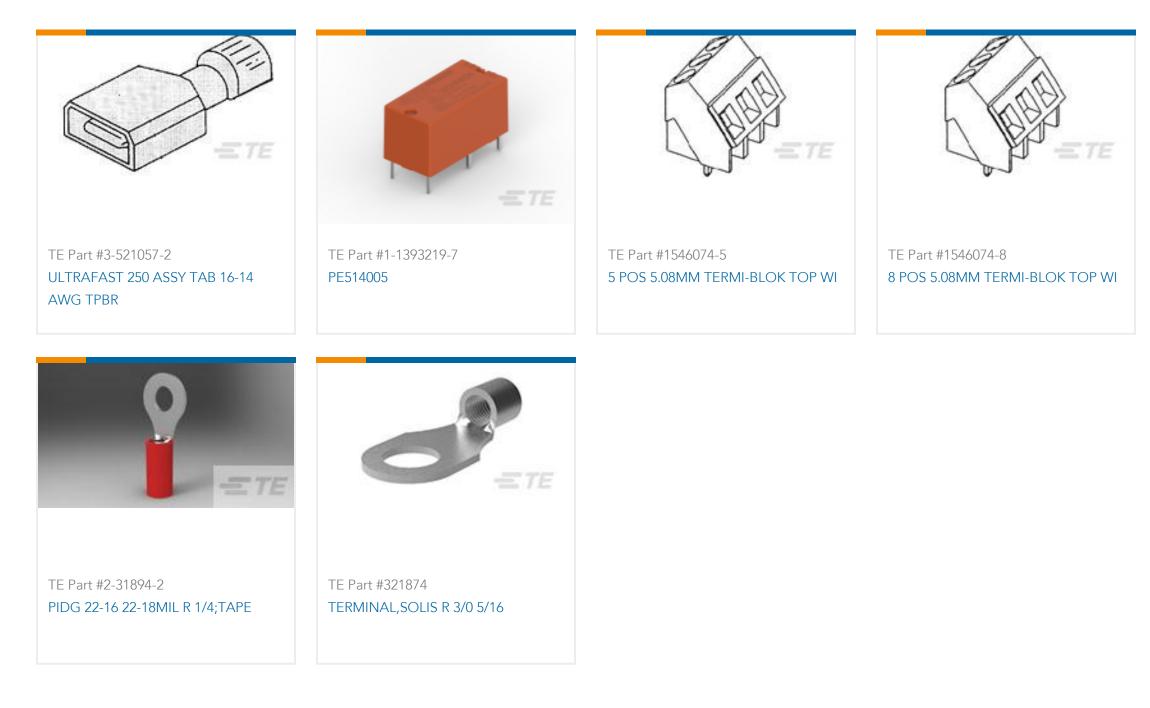

Documents

Product Drawings BNC BHD JACK PTFE

English

CAD Files Customer View Model ENG_CVM_CVM_6-331693-2_AE.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-331693-2_AE.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-331693-2_AE.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Products for Aerospace and Defense

English