
603504-2 - ACTIVE

TE Internal #: 603504-2 Splices, Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Sealable, .24 in [6.1 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper

View on TE.com >

Terminals & Splices > Splices

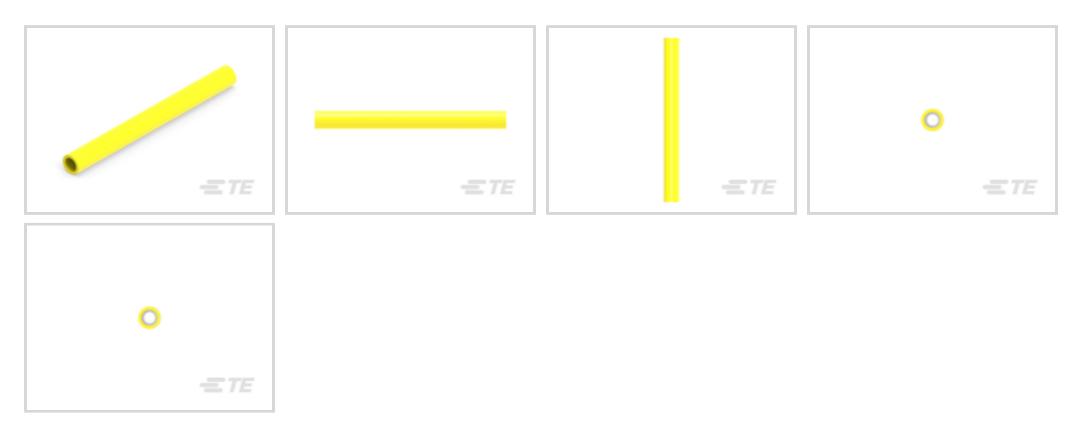

Wire Size: **3–6 mm²**

Sealable: Yes

Compatible Insulation Diameter Range: 6.1 mm [.24 in]

Barrel Inside Diameter: 6.1 mm [.24 in]

Features

Product Type Features



Sealable	Yes
Splice Type	Butt Splice
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	600 V
Body Features	
Insulation Type	Pre-Insulated
	.007 oz
Insulation Material	Nylon
Primary Product Color	Yellow
Contact Features	
Terminal Plating Material	Tin

603504-2

Splices, Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Sealable, .24 in [6.1 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Recovered Inside Diameter	2.92 mm[.115 in]
Outside Diameter	6.35 mm[.25 in]
Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	6.1 mm[.24 in]
Barrel Inside Diameter	6.1 mm[.24 in]
Product Length	47.5 mm[1.87 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Industry Standards	
Government Qualified Splice	No

Packaging Features

Packaging Quantity

Packaging Method

Loose Piece

50

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer	

603504-2

Splices, Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Sealable, .24 in [6.1 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought



TE Part #1761609-3 IDC LOW PRO HDR 10P RA SHT LAT

TE Part #55824-1 22-18 PRE-INSUL SEALED SPLICE TE Part #2-1614884-5 CPF 0805 22R 0.1% 25PPM 1K RL TE Part #103906-5 06 MTE HDR SRRA LATCH .100CL



Documents

Product Drawings
12-10 PRE-INSUL SEALED SPLICE

English

CAD Files

3D PDF

3D

603504-2

Splices, Butt Splice, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Sealable, .24 in [6.1 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



Customer View Model

ENG_CVM_CVM_603504-2_K.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_603504-2_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_603504-2_K.3d_stp.zip

English

Customer View Model

ENG_CVM_603504-2_N.3d_igs.zip

English

Customer View Model

ENG_CVM_603504-2_N.3d_stp.zip

English

Customer View Model

ENG_CVM_603504-2_N.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RADIATION_RESISTANT_PRE-INSULATED_TERMINALS_SPLICES

English