62040-2 - ACTIVE

AMPLIVAR

TE Internal #: 62040-2 Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR

View on TE.com >

Terminals & Splices > Splices



Wire Size: .8 – 2.5 mm²

Sealable: No

Splice Capacity: 3

Splice Features: Serrated

Features

Product Type Features



Sealable	No					
Splice Type	Pigtail Splice					
Compatible With Discrete Wire Type	Magnet Wire, Solid					
Configuration Features						
Strip Orientation	End Feed					
Splice Capacity	3					
Number of Serrations	7					
Electrical Characteristics						
Operating Voltage	250 V					
Body Features						
Product Weight	.2 g					
Splice Features	Serrated					
Contact Features						
Terminal Plating Material	Unplated					

C For support call+1 800 522 6752

Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR



Contact Base Material	Brass
Barrel Type	Open
Termination Features	
Crimp Width	2.79 mm[.11 in]
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	1500 – 5000 CMA
Terminal Material Thickness	.51 mm[.02 in]
Product Length	5.72 mm[.225 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No

Government Qualified Splice

Packaging Features

Packaging Quantity	30000
Packaging Method	Strip
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts











TE Part # 2-2150115-2 OCEAN_2.0_APPLICATOR-E-110F



OCEAN_2.0_APPLICATOR-E-110F

TE Part # 2150115-2

TE Part # 2150117-2 OCEAN-2.0-APPLICATOR-E-110F

TE Part # 2305750-1 SYSTEM, INVERTED SPLICE




TE Part # 2305750-2 SYSTEM, INVERTED SPLICE



TE Part # 2305750-3 APPLICATOR, INVERTED SPLICE




TE Part # 7-2150115-2 OCEAN_2.0_APPLICATOR-E-110F




TE Part # 7-2150115-7 OCEAN_2.0_SPARE_PART_KIT-110F

Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR



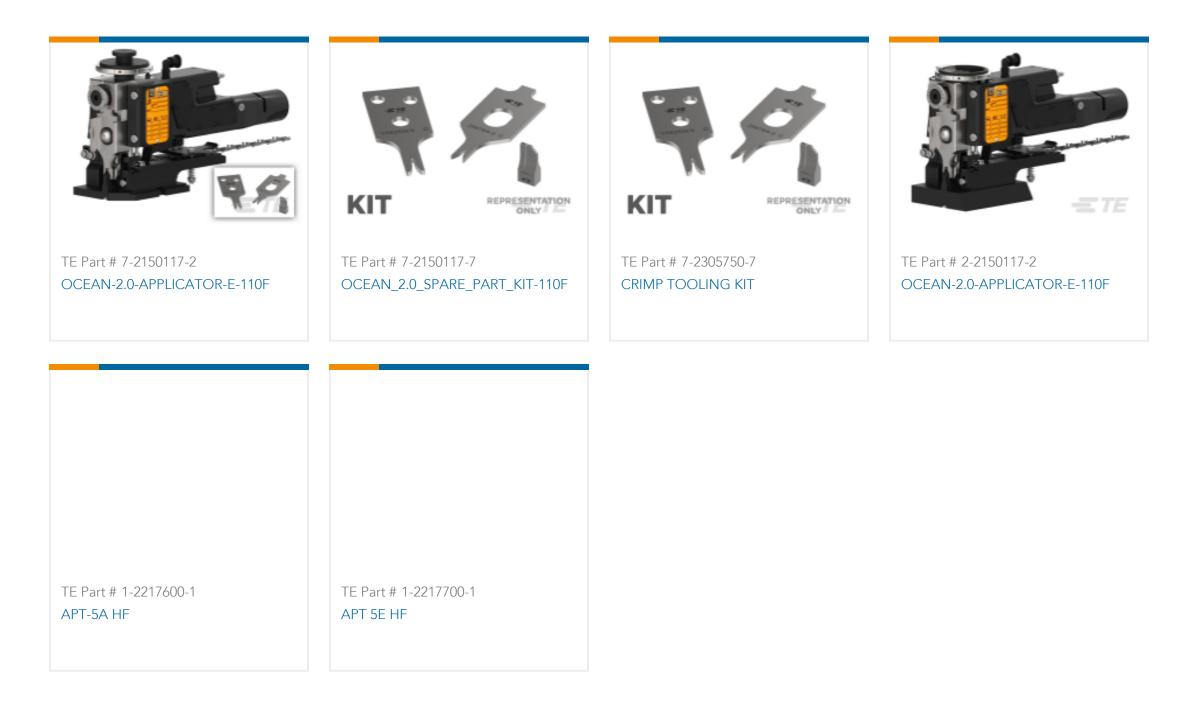

Also in the Series | AMPLIVAR

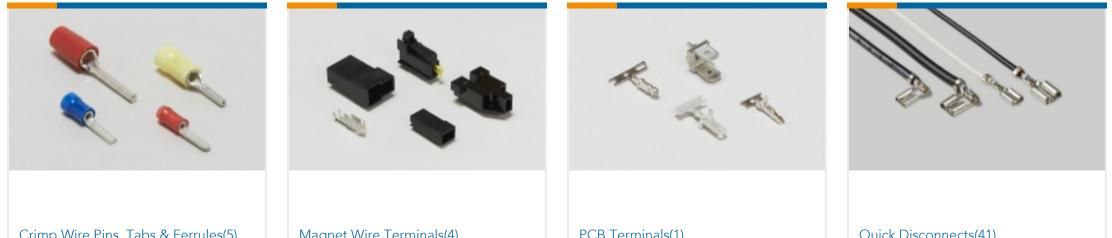

Crimp Wire Pins, Tabs & Ferrules(5)	Magnet Wire Terminals(4)	PCB Terminals(T)	Quick Disconnects(41)	




Customers Also Bought



Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR



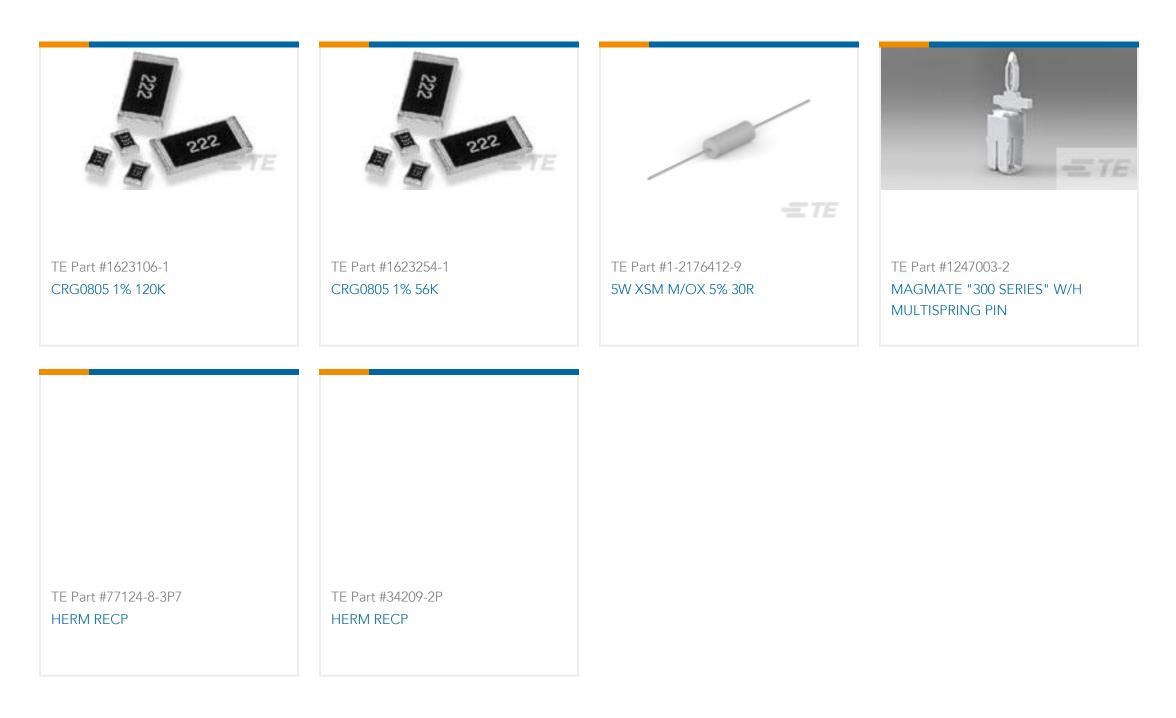

Documents

Product Drawings

SPLC AMVAR 1500-5000 .020BR

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_62040-2_Y.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_62040-2_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_62040-2_Y.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications

Application Specification

English

AMPLIVAR 7 Serration Pigtail Splice

English

Splices, Pigtail Splice, 18.5 – 13.5 AWG Wire Size, .8 – 2.5 mm² Wire Size, Splice Capacity 3, Serrated, 1500 – 5000 CMA Wire Size, Brass, AMPLIVAR



Product Environmental Compliance Product Compliance

English

Product Compliance

English