


TE Internal #: 62134-2 Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 3.56 mm [.14 in], Straight, Steel, Nickel Plating

View on TE.com >

E TE connectivity

Terminals & Splices > Quick Disconnects

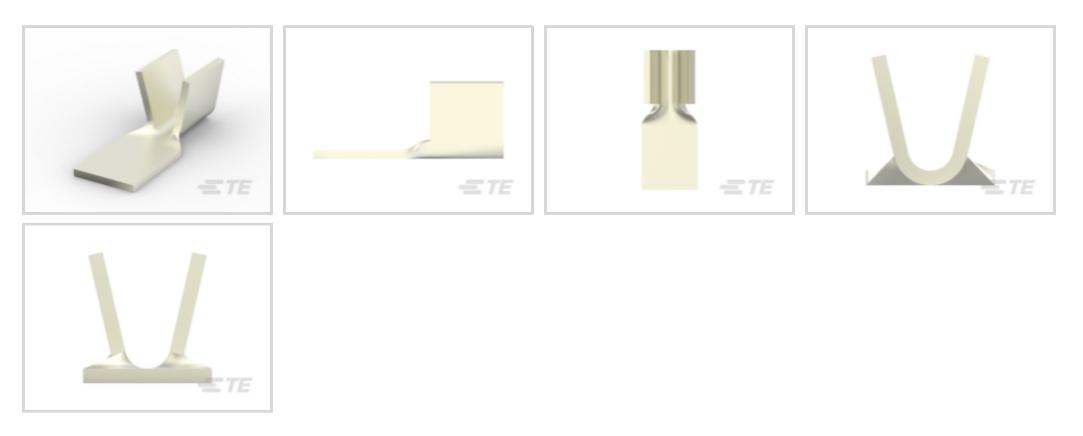

Quick Disconnect Terminal Type: Tab

Wire Size: .82 – 2.08 mm²

Mating Tab Width: 3.56 mm [.14 in]

Mating Tab Thickness: .41 mm [.016 in]

Features

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire
Contact Features	
Quick Disconnect Terminal Type	Tab
Mating Tab Width	3.56 mm[.14 in]
Mating Tab Thickness	.41 mm[.016 in]
Terminal Orientation	Straight
Contact Base Material	Steel
Terminal Plating Material	Nickel
Crimp Type	F-Crimp
Barrel Type	Open
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With

62134-2

Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 3.56 mm [.14 in], Straight, Steel, Nickel Plating



Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.82 – 2.08 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 250 °C[-40 – 482 °F]
Packaging Features	
Packaging Quantity	5500
Packaging Method	Strip/Reel
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE

2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

62134-2


Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 3.56 mm [.14 in], Straight, Steel, Nickel Plating



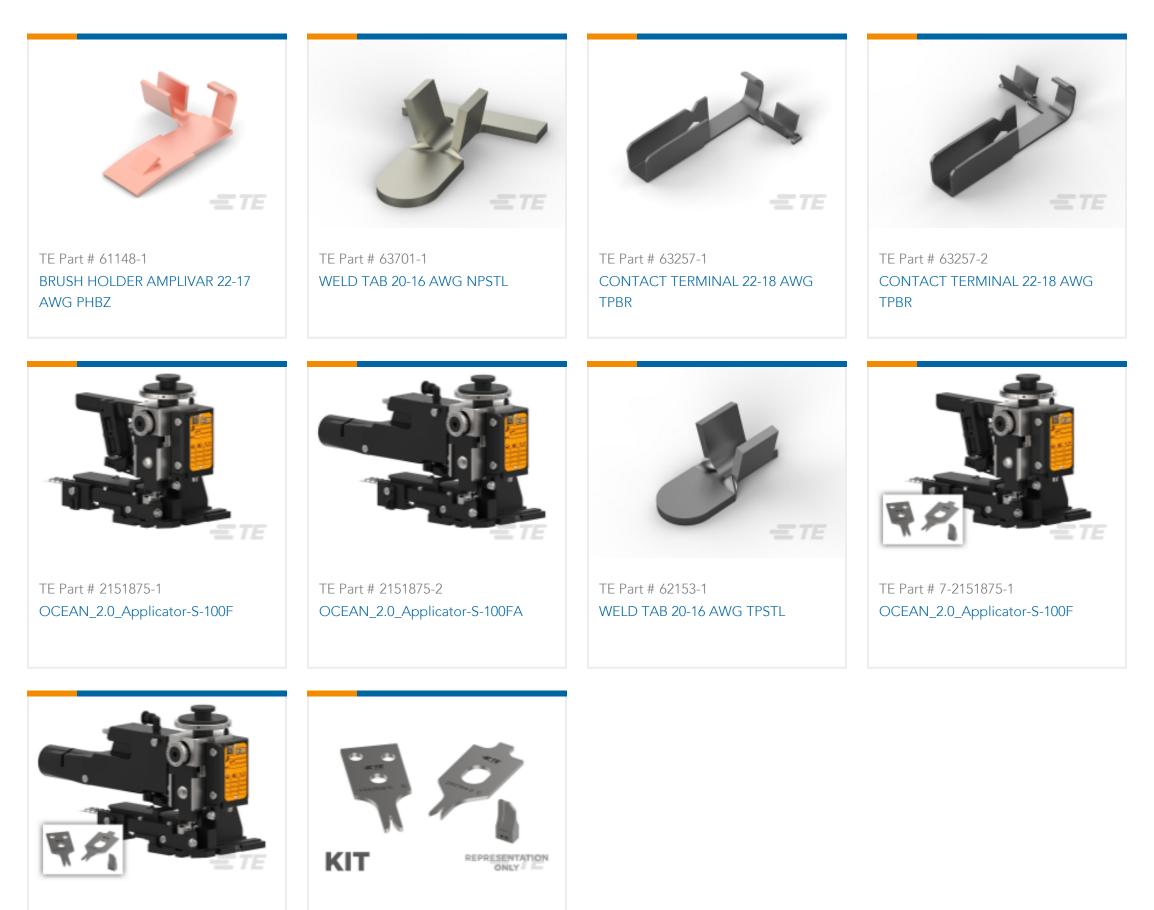

TE Part # 7-2151875-2 OCEAN_2.0_Applicator-S-100FA TE Part # 7-2151875-7 OCEAN_2.0_SPARE_PART_KIT-100F

Customers Also Bought

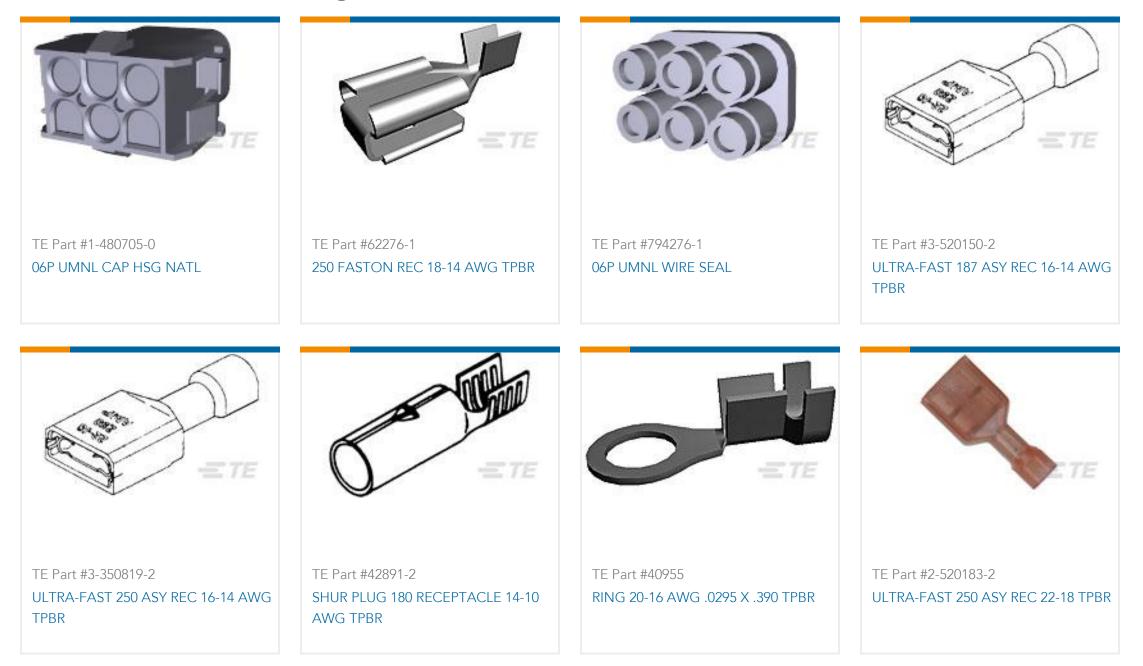

62134-2

Quick Disconnects, Tab, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 3.56 mm [.14 in], Straight, Steel, Nickel Plating





Documents

Product Drawings CONTACT 18-14 AWG NPSTL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_62134-2_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_62134-2_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_62134-2_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.