


Z-PACK | Z-PACK HM-Zd

TE Internal #: 6469083-3 High Speed Backplane Connectors, 60 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 6 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

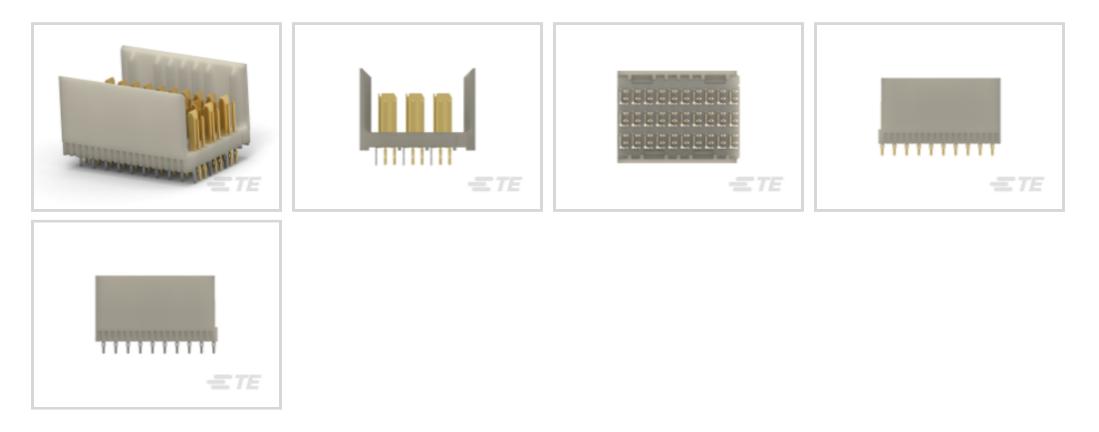

Connector System: Board-to-Board Number of Positions: 60 Row-to-Row Spacing: 1.5 mm [.059 in]

Mating Alignment: With

Mating Alignment Type: Guide Lugs

Features

E T E connectivity

Product Type Features

Connector System	Board-to-Board	
PCB Connector Assembly Type	PCB Mount Header	
Shroud Style	Partially Shrouded	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Pairs per Column	3	
Number of Ground Positions	30	
Number of Pairs	30	
Number of Signal Positions	60	
Number of Positions	60	
Number of Rows	6	
Number of Columns	10	
PCB Mount Orientation	Vertical	
Guide Location	Unguided	

High Speed Backplane Connectors, 60 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 6 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



Electrical Characteristics 250 VAC Operating Voltage Signal Characteristics Data Rate ≤12 Gb/s **Body Features** Shield Material Phosphor Bronze Primary Product Color Gray **Contact Features** Contact Layout Matrix Pin Contact Type Contact Mating Area Plating Material Thickness .76 µm[30 µin] Contact Mating Area Plating Material Gold Contact Base Material Phosphor Bronze Contact Current Rating (Max) .7 A **Termination Features** 2.5 mm[.098 in] Termination Post & Tail Length Termination Method to Printed Circuit Board Through Hole - Press-Fit

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Guide Lugs
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Connector Length	24.95 mm[.988 in]
Connector Height	13.4 mm[.527 in]
Connector Width	18.93 mm[.745 in]
Row-to-Row Spacing	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]

High Speed Backplane Connectors, 60 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 6 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tube
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

High Speed Backplane Connectors, 60 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 6 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd






Also in the Series Z-PACK HM-Zd

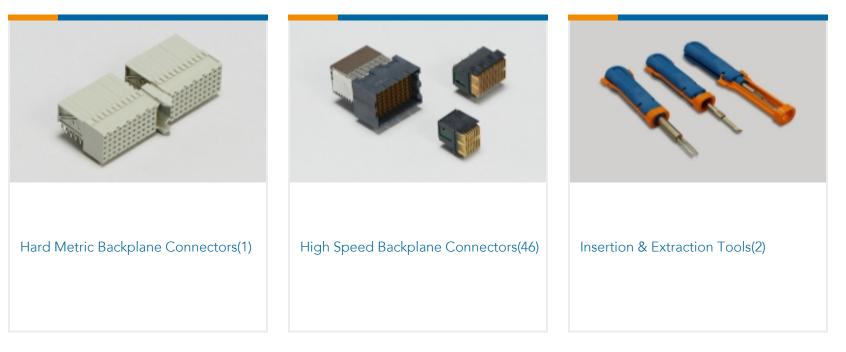

Customers Also Bought



TE Part #1888247-1	TE Part #6469169-1	TE Part #1-5353190-0	TE Part #6469001-1
20 POS SMT CONN, SFP/SFP+, 30A	HMZD 2PR RA HDR 40P	.6FHR04H,140,S,GIG,08/Sn,TR,NSYes	HM-ZD 4PR RECP 80P

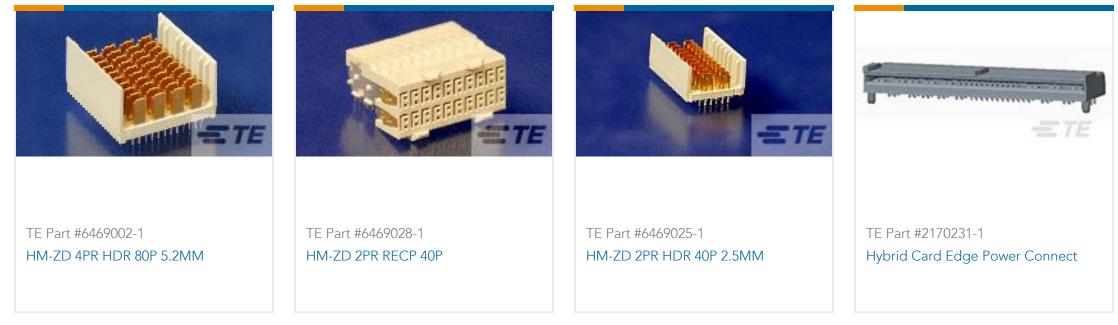



High Speed Backplane Connectors, 60 Position, Mating Alignment, Guide Lugs Mating Alignment Type, 6 Row, 10 Column, PCB Mount Header, Z-PACK HM-Zd



Documents

Product Drawings HMZD 3PAIR, HDR ASSY, 25MM MOD

English

CAD Files

Customer View Model ENG_CVM_CVM_6469083-3_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6469083-3_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6469083-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.