647402-3 <

SL-156

TE Internal #: 647402-3 Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >



Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 3.96 mm [.156 in]

All Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156 (107)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	

C For support call+1 800 522 6752

09/27/2023 09:39AM | Page 1

Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156



Primary Product Color	Natural	
Contact Features		
Contact Retention Within Housing	Without	
Contact Layout	Inline	
Contact Type	Socket	
Contact Current Rating (Max)	6.5 A	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Strain Relief	Without	
PCB Mount Alignment	Without	
Panel Mount Feature	Without	
PCB Mount Retention	Without	
Mating Retention Type	Locking Ramp	
Mating Retention	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	

Housing Features

Housing Entry Configuration	Left End Open	
Housing Material	Nylon - GF	
Centerline (Pitch)	3.96 mm[.156 in]	
Dimensions		
	.346 in	
Connector Height	6.35 mm	
Wire Size	.0509 – .823 mm²	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Agency/Standard	CSA, UL	
UL Flammability Rating	UL 94V-0	
Packaging Features		

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156



Packaging Quantity	1	
Packaging Method	Package	
Other		
Discrete Wire Connector Comment	Unit Accepts 1.14[.045] Square or Round Post, Accepts Keying Plug 640254-1and 640255-1	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per	

Free


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156



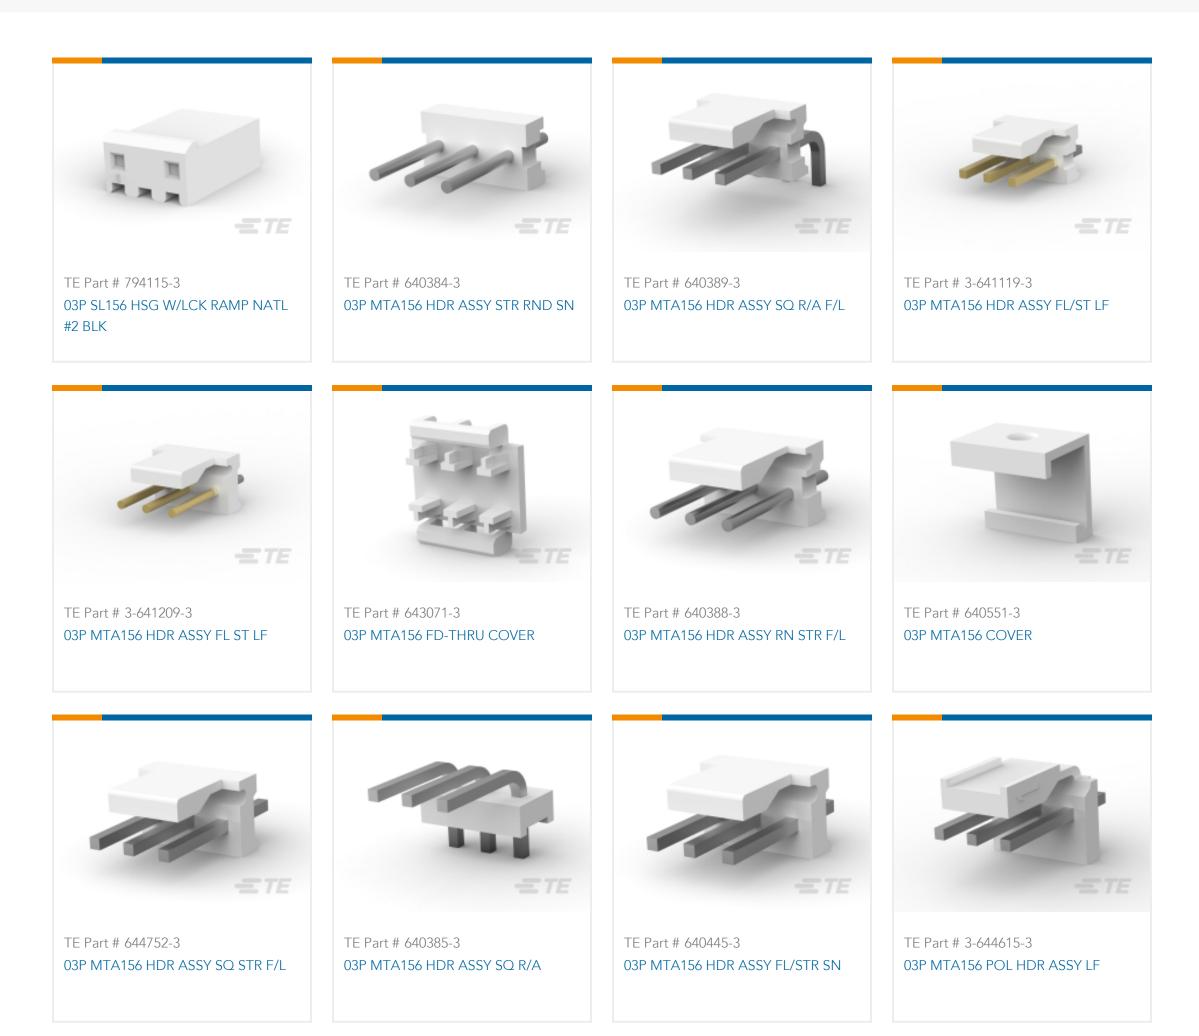


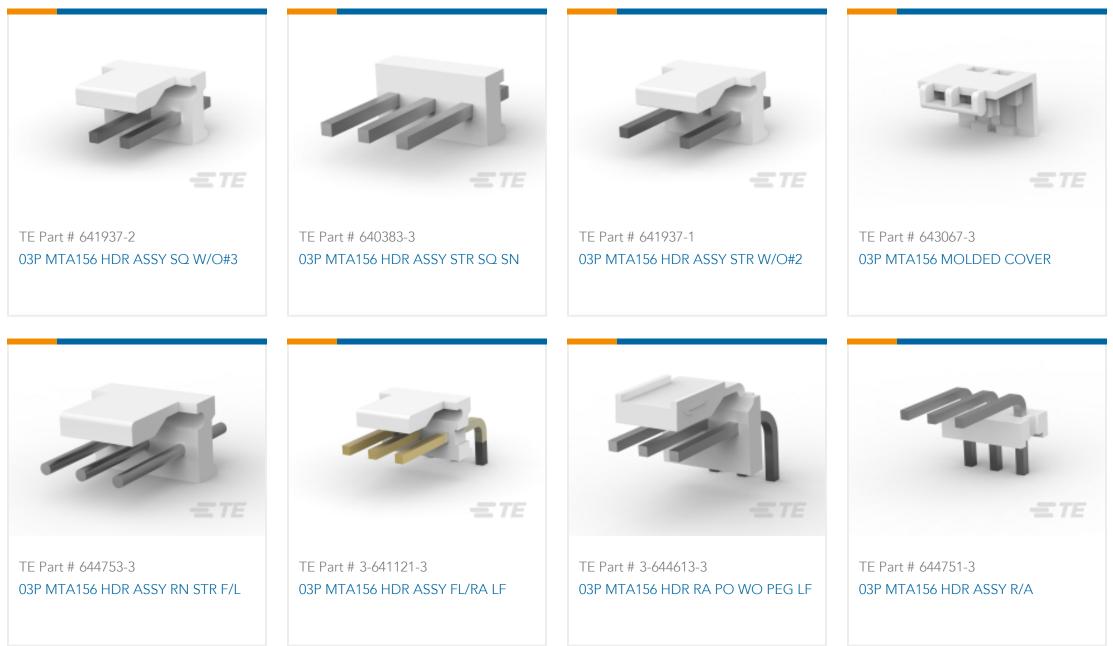


Also in the Series | SL-156


Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156



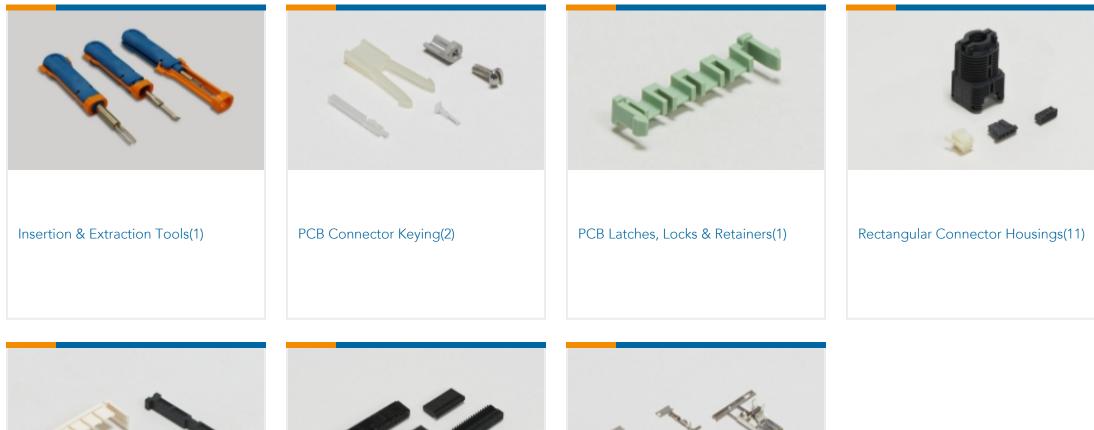

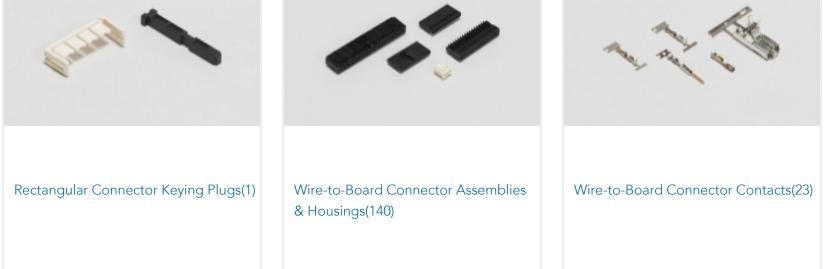

Customers Also Bought

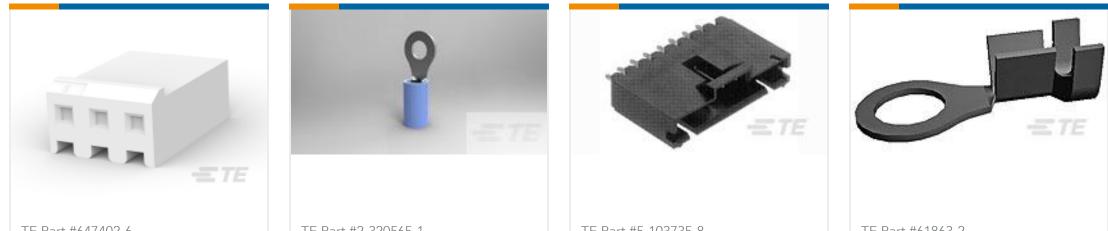

TE Part #647402-6 Receptacle Housing: Wire-to-Board, with Mating Alignment, SL156	TE Part #2-320565-1 TERMINAL,PIDG R 16-14 8	TE Part #5-103735-8 09 MTE HDR SRST LATCH .100CL	TE Part #61863-2 RING CRIMP 18-14 AWG TPBR
	A123461 A123462 A123456		
TE Part #323152 DG 22-16COM 22-18MIL HR R 8	TE Part #CV4186-000 RNF-100-1/4-BK-SP-SH	TE Part #CB5334-000 SST-48-07/FR/97	TE Part #1586532-2 03P CMNL HDR ASSY SHORT LF

TE Part #981155-4 NUT,HEX,JAM

Documents

Housing, Receptacle, Wire-to-Board, 3 Position, .156 in [3.96 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, SL-156



Product Drawings

03P SL156 HSG W/RMP&TABS,OVSZ

English

CAD Files

Customer View Model ENG_CVM_CVM_647402-3_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_647402-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_647402-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance MD_647402-3_021220181058_dmtec

English

MD_647402-3_021220181058_dmtec

English

Agency Approvals

UL Report

English