

AMP | AMP Type III+

TE Internal #: 66106-4

Power Contacts, Contact, Precious Metal, 26 – 24 AWG Wire Size, .


12 – .2 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin,

AMP Type III+

View on TE.com >



Connectors > Power Connectors > Power Contacts

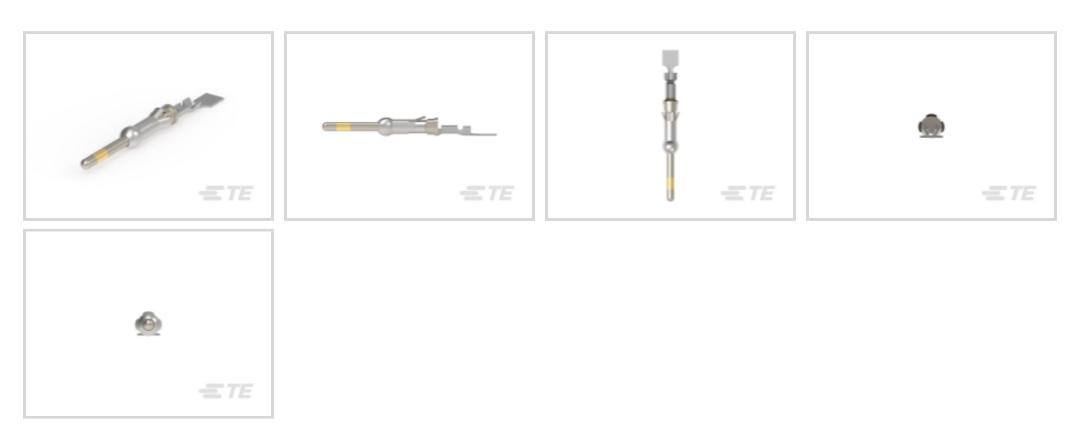

Power Contact Type: Contact

Contact Mating Area Plating Material: Precious Metal

Wire Size: .12 – .2 mm²

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Contact Features	
Contact Size	Size 16
Barrel Type	Open
Contact Mating Area Plating Material	Precious Metal
Contact Current Rating (Max)	13 A
Contact Type	Pin
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Material	Tin
Wire Contact Termination Area Plating Material Finish	Matte



Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	.12 – .2 mm²
Compatible Insulation Diameter Range	.89 – 1.4 mm[.035 – .055 in]
Usage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	4000
Packaging Method	Reel
Other	
Power Connectors Comment	Overall insulation crimp diameter, including crimp barrel, must not exceed 3.18 [.125].

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 58495-2
PROCRIMPER DIE ASSY MULTIMATE



TE Part # 200893-2
INSERTION TOOL CONT



TE Part # 58495-1
PRO CRIMPER ASSY MULTIMATE



TE Part # 305183
EXTRACT TOOL TYPE 2 20-16



Strip Terminal Cutter-Side Feed-No Crimp



TE Part # 539972-1
EXTRACTION TOOL



TE Part # 2-2266335-1 OCEAN_2.0_APPLICATOR-S-055F070O




TE Part # 2-2266335-2 OCEAN_2.0_APPLICATOR-S-055F070OA



Also in the Series | AMP Type III+



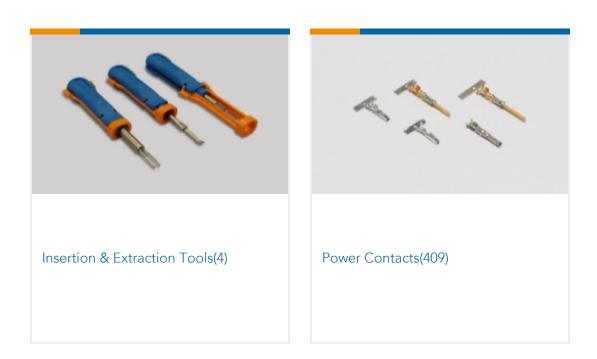

Customers Also Bought


















Documents

Product Drawings

III+ PIN,26-24,30AU/FL,STRIP

English

CAD Files

Customer View Model

ENG_CVM_CVM_66106-4_AS.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66106-4_AS.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66106-4_AS.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Power Contacts, Contact, Precious Metal, 26 – 24 AWG Wire Size, .12 – .2 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English