AMP | AMP Type III+


TE Internal #: 66107-9

Power Contacts, Contact, Tin, 26 – 24 AWG Wire Size, .12 – .2 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+

View on TE.com >



Connectors > Power Connectors > Power Contacts

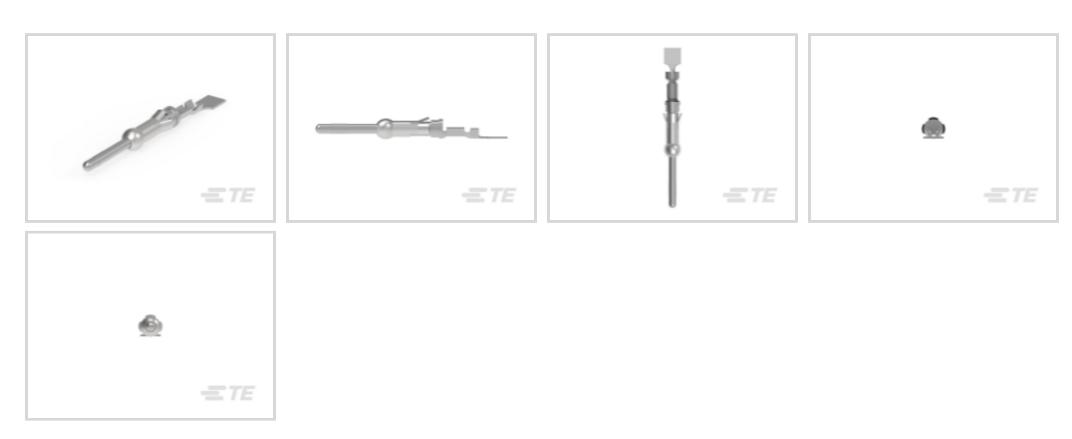

Power Contact Type: Contact

Contact Mating Area Plating Material: Tin

Wire Size: .12 – .2 mm²

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Contact Features	
Contact Size	Size 16
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	13 A
Contact Type	Pin
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Material	Tin-Lead
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel



Contact Underplating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	$.122 \text{ mm}^2$
Compatible Insulation Diameter Range	.89 – 1.4 mm[.035 – .055 in]
Usage Conditions	
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	CSA, UL
Packaging Features	
Packaging Quantity	100
Packaging Method	Box, Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts














Also in the Series | AMP Type III+

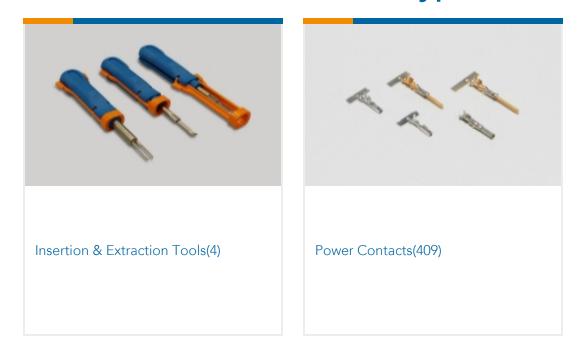

Customers Also Bought





















Documents

Product Drawings

III+ PIN,26-24,TIN-LEAD,SMPACK

English

CAD Files

Customer View Model

ENG_CVM_CVM_66107-9_AC.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66107-9_AC.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66107-9_AC.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Power Contacts, Contact, Tin, 26-24 AWG Wire Size, .12-.2 mm 2 Wire Size, Wire & Cable, Crimp, Power & Signal, Pin, AMP Type III+



Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English