

ELCON | ELCON Drawer

TE Internal #: 6648400-1 Power Contacts, Contact, Gold, Printed Circuit Board, Power, Socket, -55 – 105 °C [-67 – 221 °F], Copper, Bright, Straight, Nickel, Bag, ELCON Drawer

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact Contact Mating Area Plating Material: Gold Connector & Contact Terminates To: Printed Circuit Board Contact Current Rating (Max): 75 A Circuit Application: Power

Features



Product Type Features

Power Contact Type	Contact	
Connector & Contact Terminates To	Printed Circuit Board	
Contact Features		
Contact Size	Size 8	
PCB Contact Termination Area Plating Material Thickness	5.08 – 7.62 μm[200 – 300 μin]	
PCB Contact Termination Area Plating Material	Silver	
Contact Mating Area Plating Material	Gold	
Contact Current Rating (Max)	75 A	
Contact Type	Socket	
Contact Retention Within Housing	Without	
Mating Pin Diameter	3.6 mm[.142 in]	
Contact Base Material	Copper	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]	
Wire Contact Termination Area Plating Material Finish	Bright	

Power Contacts, Contact, Gold, Printed Circuit Board, Power, Socket, -55 – 105 °C [-67 – 221 °F], Copper, Bright, Straight, Nickel, Bag, ELCON Drawer



Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1 μm[40 μin]
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Wire Insulation Support	Without
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	250
Packaging Method	Bag
Other	
Power Connectors Comment	PCB Termination Type - Standard

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (3.7% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

Power Contacts, Contact, Gold, Printed Circuit Board, Power, Socket, -55 – 105 °C [-67 – 221 °F], Copper, Bright, Straight, Nickel, Bag, ELCON Drawer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | ELCON Drawer




		A CONTRACTOR OF THE OF	
PCB Connector Mounting(1)	Power Contacts(35)	Rectangular Connector Hardware(1)	Rectangular Power Connectors(32)

Customers Also Bought



Power Contacts, Contact, Gold, Printed Circuit Board, Power, Socket, -55 – 105 °C [-67 – 221 °F], Copper, Bright, Straight, Nickel, Bag, ELCON Drawer



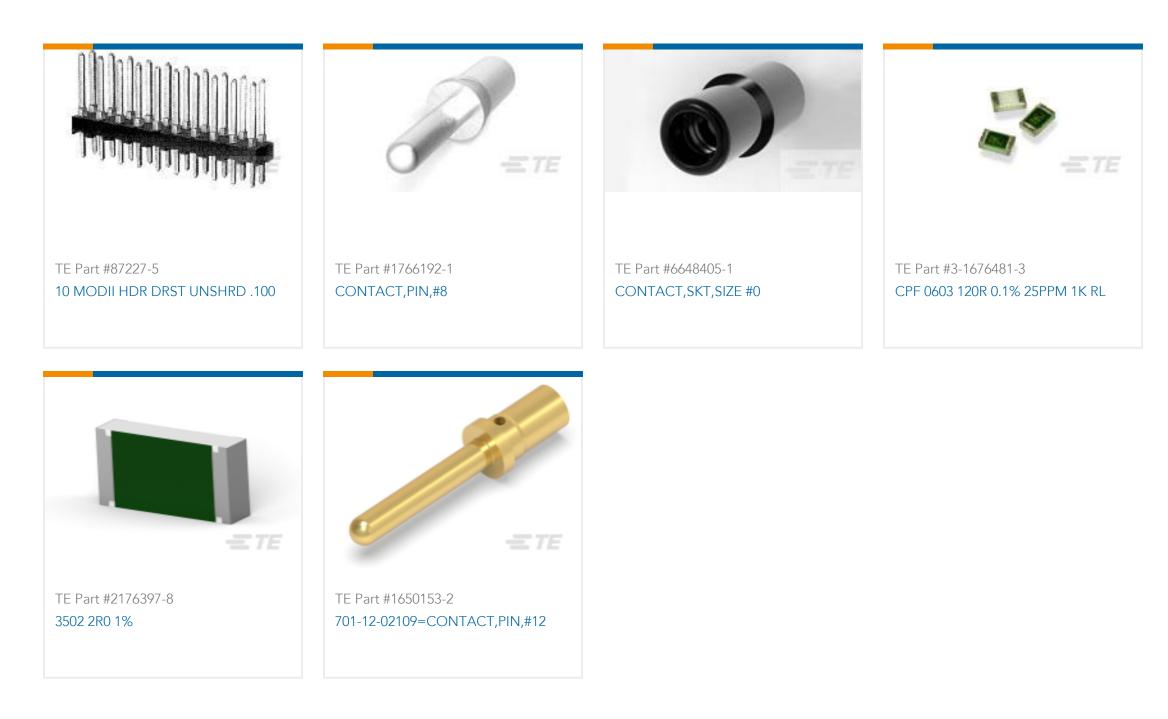

Documents

Product Drawings CONTACT,SKT

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_6648400-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6648400-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6648400-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

AMP & ELCON Power Connector Layout Forms Datasheet 6-1773444-7

English

Product Specifications

Application Specification

English

Power Contacts, Contact, Gold, Printed Circuit Board, Power, Socket, -55 – 105 °C [-67 – 221 °F], Copper, Bright, Straight, Nickel, Bag, ELCON Drawer

