

AMP | AMP Type IV

TE Internal #: 66592-1

Power Contacts, Contact, 250 VAC, 250 VDC, Tin, 22 – 18 AWG

Wire Size, .3 – .9 mm² Wire Size, Wire & Cable, Crimp, Signal,

Socket, AMP Type IV

View on TE.com >



Connectors > Power Connectors > Power Contacts











Power Contact Type: Contact
Operating Voltage: 250 VDC

Contact Mating Area Plating Material: Tin

Wire Size: **22 – 18 AWG**

Features

Product Type Features

Power Contact Type	Contact
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Operating Voltage	250 VDC
Contact Features	
Contact Size	Size 16
Barrel Type	Open
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	1.8 A
Contact Type	Socket
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	1.02 µm[40 µin]



Contact Mating Area Plating Material Finish	Semi-Bright
Wire Contact Termination Area Plating Thickness	1 – 3 μm[40 – 118 μin]
Wire Contact Termination Area Plating Material	Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	.3 – .9 mm²
Compatible Insulation Diameter Range	1.27 – 2.79 mm[.05 – .11 in]
Usage Conditions	
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	1500
Packaging Method	Loose Piece
Other	
Power Connectors Comment	Wire strip length 3.96 [.156] for all wire sizes.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC
	Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | AMP Type IV

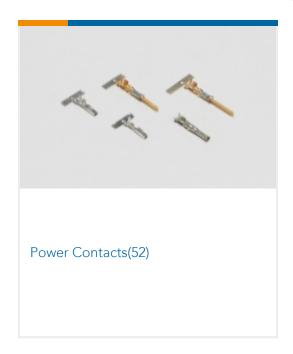

Customers Also Bought













Documents

Product Drawings

TYPE VI SKT CONT,M-MATE,LP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66592-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_66592-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66592-1_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Power Contacts, Contact, 250 VAC, 250 VDC, Tin, 22 – 18 AWG Wire Size, .3 – .9 mm² Wire Size, Wire & Cable, Crimp, Signal, Socket, AMP Type IV



Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English