### **PLASTI-GRIP**

TE Internal #: 696050-1


Closed Ring Tongue Terminal, 8 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated,

PLASTI-GRIP

View on TE.com >



Terminals & Splices > Ring Terminals

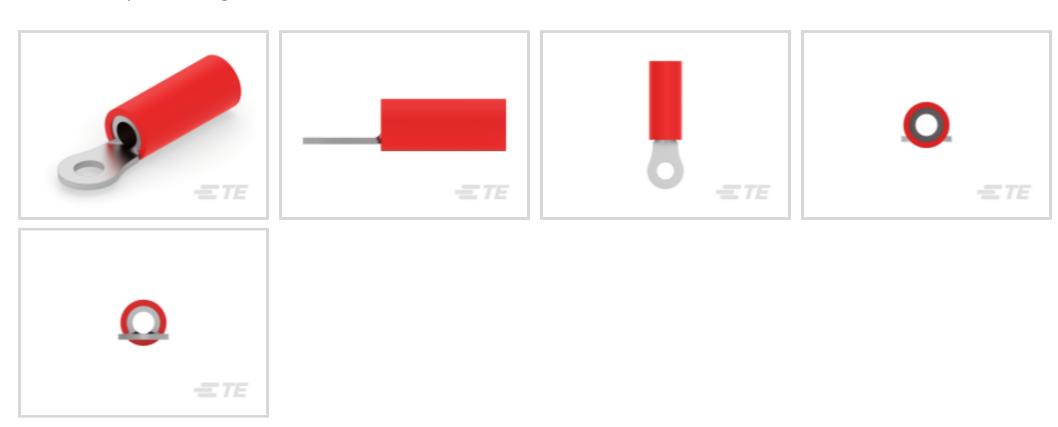

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 13100 – 20800 CMA

Stud Size: #10

## **Features**

### **Product Type Features**

Froduct Type reatures	
Terminal Features	Heavy Duty
Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#10
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	600 V
Body Features	
Product Weight	3.837 g
Insulation Sleeve Color	Red
Stripe Color	Red
Contact Features	
Barrel Type	Closed



Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	13100 – 20800 CMA
Stud Diameter	5 mm[.197 in]
Tongue Thickness	1.22 mm[.048 in]
Product Length	35.31 mm[1.39 in]
Compatible Insulation Diameter (Max)	9.14 mm[.36 in]
Compatible Insulation Diameter Range	9.14 mm[.36 in]
Usage Conditions	
Insulation Option	Partially Insulated
Insulation Option Operating Temperature Range	Partially Insulated  105 °C[221 °F]
Operating Temperature Range	
Operation/Application	105 °C[221 °F]
Operating Temperature Range  Operation/Application  Compatible With Wire Base Material	105 °C[221 °F]  Copper
Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material	105 °C[221 °F]  Copper
Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material  Industry Standards	105 °C[221 °F]  Copper  Tin
Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material  Industry Standards  Government Qualified Terminal	105 °C[221 °F]  Copper  Tin

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC



Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts



# Also in the Series | PLASTI-GRIP




Compression Connectors(3)



Crimp Wire Pins, Tabs & Ferrules(25)



Ring Terminals(333)



Spade Terminals(198)





# Customers Also Bought






















## **Documents**

## **Product Drawings**

PG 8 R 10

English

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_696050-1\_B.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_696050-1\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_696050-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Closed Ring Tongue Terminal, 8 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



Datasheets & Catalog Pages

RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English

**Product Specifications** 

**Application Specification** 

English