

FASTON | FASTON 187


TE Internal #: 696108-1

Quick Disconnects, Receptacle, 16 – 14 AWG Wire Size, 1.04 – 2.62 mm² Wire Size, 2050 – 5180 CMA Wire Size, FASTON 187

View on TE.com >



Terminals & Splices > Quick Disconnects

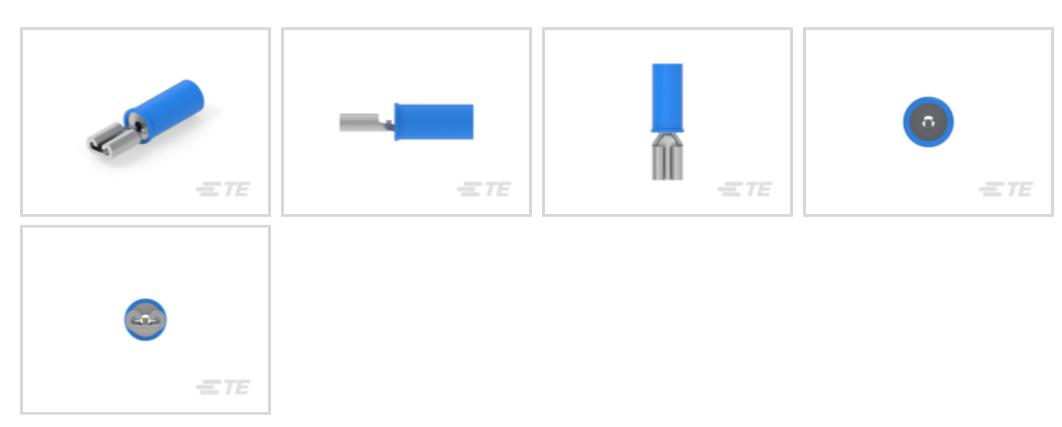

Quick Disconnect Terminal Type: Receptacle

Wire Size: **2050 – 5180 CMA**

Mating Tab Width: 4.75 mm [.187 in]

Features

Product Type Features	
Terminal Features	Wire Stop
Insertion Force	Normal
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Insulation Material	Nylon
Contact Features	
Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin

Compression

Crimp Type



Barrel Type	Closed
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Mating Retention Type	Dimple
Dimensions	
Terminal Material Thickness	.41 mm[.016 in]
Product Length	22.9 mm[.9 in]
Compatible Insulation Diameter Range	6.35 mm[.25 in]
Wire Size	2050 – 5180 CMA
Usage Conditions	
Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]
Industry Standards	
Agency/Standard	CSA, RU (UL Component Program)
Packaging Features	
Packaging Quantity	500
Packaging Method	Loose Piece
Other	
Barrel Color	Blue

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | FASTON 187




Crimp Terminal Housings(42)



Insertion & Extraction Tools(1)



Joints & Splices(1)



PCB Terminals(42)




Quick Disconnects(209)





Customers Also Bought



















Documents

Product Drawings

.187 PIDG FASTON REC.16-14

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_696108-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_696108-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_696108-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Quick Disconnects, Receptacle, 16-14 AWG Wire Size, 1.04-2.62 mm 2 Wire Size, 2050-5180 CMA Wire Size, FASTON 187



Datasheets & Catalog Pages

PIDG_FASTON

English

Ultra-Fast and Ultra Fast Plus

English

Product Environmental Compliance

TE Material Declaration

English