

Economy Power

TE Internal #: 7-1123724-5 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [.156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 9

Centerline (Pitch): 3.96 mm [.156 in]

Features

connectivity

Product Type Features

Header Type	Partially Shrouded			
Rectangular Power Connector Type	Header			
Connector & Housing Type	Plug			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of Positions	9			
Number of Positions PCB Mount Orientation	9 Vertical			
PCB Mount Orientation	Vertical			
PCB Mount Orientation Number of Power Positions	Vertical			
PCB Mount Orientation Number of Power Positions Number of Rows	Vertical			

C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power



Connector Profile	Low	
Contact Features		
Mating Post Length	7.7 mm[.303 in]	
	31.49 – 70.86 µin	
Contact Layout	Inline	
Contact Mating Area Plating Material	Tin	
Contact Base Material	Brass	
Contact Current Rating (Max)	8 A	
Contact Retention Within Housing	Without	
Contact Type	Pin	
PCB Contact Termination Area Plating Material	Tin	
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]	
Termination Features		
Termination Post & Tail Length	1.16 mm[.026 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mating Retention	With	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	Without	
Mating Retention Type	Latch	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	3.96 mm[.156 in]	
Housing Color	Natural	
Housing Material	PBT GF	
Dimensions		
Connector Height	8.2 mm[.32 in]	
Product Width	10.7 mm[.421 in]	
Product Length	35.58 mm[1.401 in]	
Usage Conditions		
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]	

C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power



Operation/Application

Circuit Application	Power	
Industry Standards		
UL Flammability Rating	UL 94V-2	
Glow Wire Rating	GWT 750°C (Without Flame)	
Packaging Features		
Packaging Quantity	700	
Packaging Method	Bag	
Product Compliance For compliance documentation, visit the product page on TE.com>		
•	Compliant	
For compliance documentation, visit the product page on TE.com>	Compliant Compliant	
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU		

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Does not contain REACH SVHC

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power



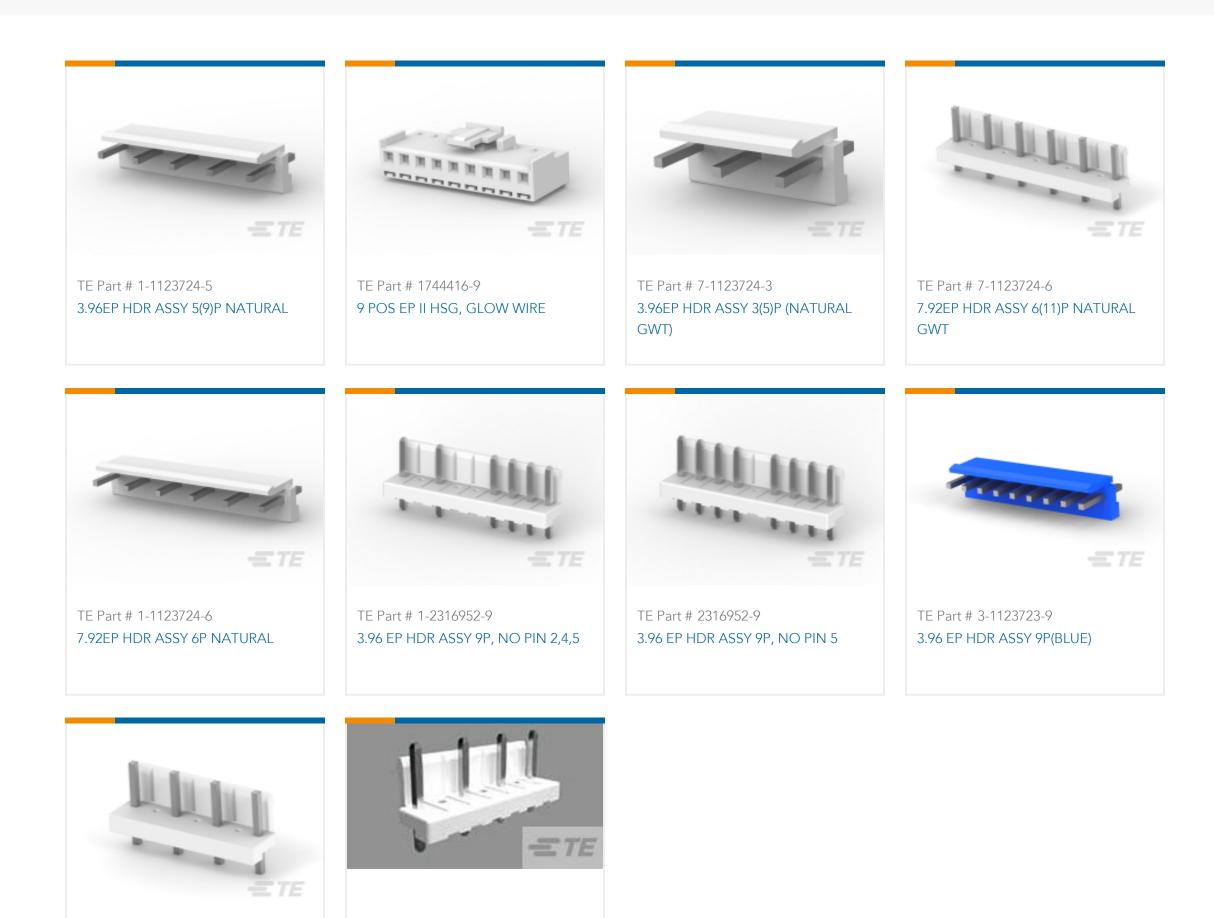

TE Part # 7-1123724-1 3.96EP HDR ASSY 4(7)P (NATURAL GWT)


TE Part # 7-1123724-2 03P EP HDR HSG V0 GWT NO 02P

Also in the Series | Economy Power

A Contraction of the second se			Contraction of the second
Connector Contacts(1)	Insertion & Extraction Tools(1)	PCB Headers & Receptacles(162)	PCB Latches, Locks & Retainers(2)
A A A			
Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies & Housings(142)

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power



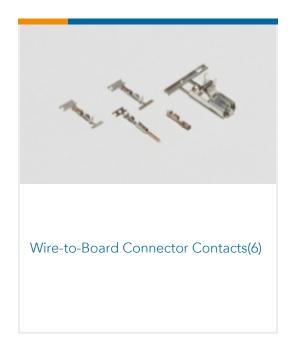

Customers Also Bought



Documents

Product Drawings 3.96EP HDR ASSY 5(9)P NATURAL, GWT

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_7-1123724-5_AD.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_7-1123724-5_AD.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_7-1123724-5_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

English

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 9 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-2, Economy Power



Product Environmental Compliance

MD_7-1123724-5_06212017640_dmtec

English

MD_7-1123724-5_06212017640_dmtec

English

Agency Approvals

UL Report

English