
P40P42A12P1-120 ! PENDING OBSOLESCENCE

Potter & Brumfield | Potter & Brumfield P40 TE Internal #: 7-1393132-0 TE Internal Description: P40P42A12P1-120=CONTACTORS View on TE.com >



Relays, Contactors & Switches > Contactors > Definite Purpose Contactors

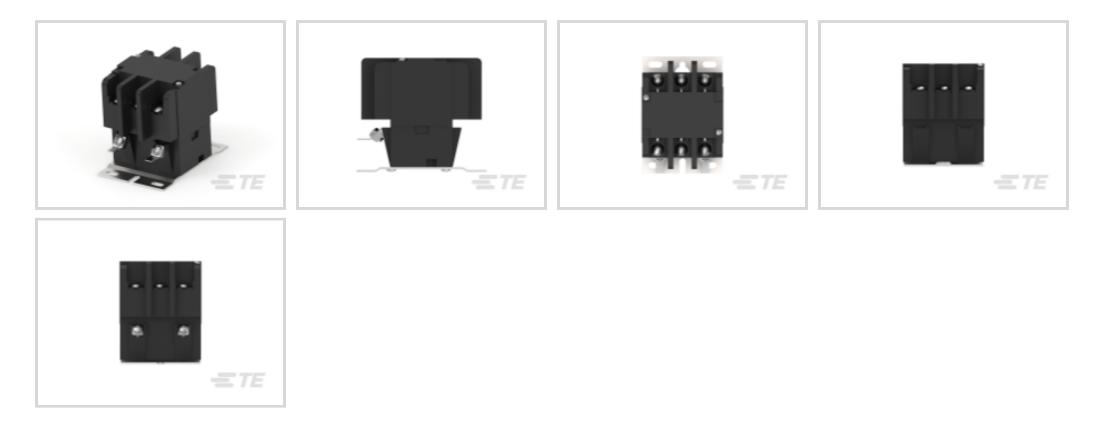

Pole Configuration: 3

Definite Purpose Contactor Coil Voltage Rating: 120 VAC

Definite Purpose Contactor Contact Current Rating: 40 A

Definite Purpose Contactor Mounting Type: Panel

Definite Purpose Contactor Contact Arrangement: **3 Form X, 3PST-NO-DM**

Features

Product Type Features

| Molded | No | |
|--|--------------------------|--|
| Product Category | Electromechanical Relays | |
| Product Type | Contactor | |
| Arc Cover | With | |
| Product Classification | Relays - Contactors | |
| Contactor Type | Definite Purpose | |
| Terminal Configuration | 10-32 Screw | |
| Configuration Features | | |
| Auxiliary Switch Contact Arrangement | Without | |
| Electrical Characteristics | | |
| Actuating System | AC | |
| Coil Voltage (Max) | 120 VAC | |
| Definite Purpose Contactor Coil Voltage Rating | 120 VAC | |
| Definite Purpose Contactor Coil Resistance | 117 Ω | |
| Definite Purpose Contactor Contact Switching Voltage (Max) | 600 VAC | |



Contact Features

| Contact Base Material | Silver Cadmium Oxide | | |
|---|------------------------------|--|--|
| Pole Configuration | 3 | | |
| Definite Purpose Contactor Contact Current Rating | 40 A | | |
| Definite Purpose Contactor Contact Arrangement | 3 Form X, 3PST-NO-DM | | |
| Termination Features | | | |
| Coil Termination | 8-32 Screw, Quick Connect | | |
| Mechanical Attachment | | | |
| Mounting Plate | With | | |
| Definite Purpose Contactor Mounting Type | Panel | | |
| Dimensions | | | |
| Wire Size | 8.37 mm ² | | |
| Industry Standards | | | |
| UL Flammability Rating | UL 94V-0 | | |
| Agency Approval | CSA Certified, UL Recognized | | |
| Packaging Features | | | |
| Packaging Method | Individual | | |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| | EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|--|---|--|
| | EU ELV Directive 2000/53/EC | Not Compliant |
| | China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| | EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Cadmium oxide (10.81% in Component Part) Micle Safe Usage Statements: |
| | Halogen Content | Not Yet Reviewed for halogen content |
| | Solder Process Capability | Not applicable for solder process capability |

P40P42A12P1-120=CONTACTORS



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series

Customers Also Bought

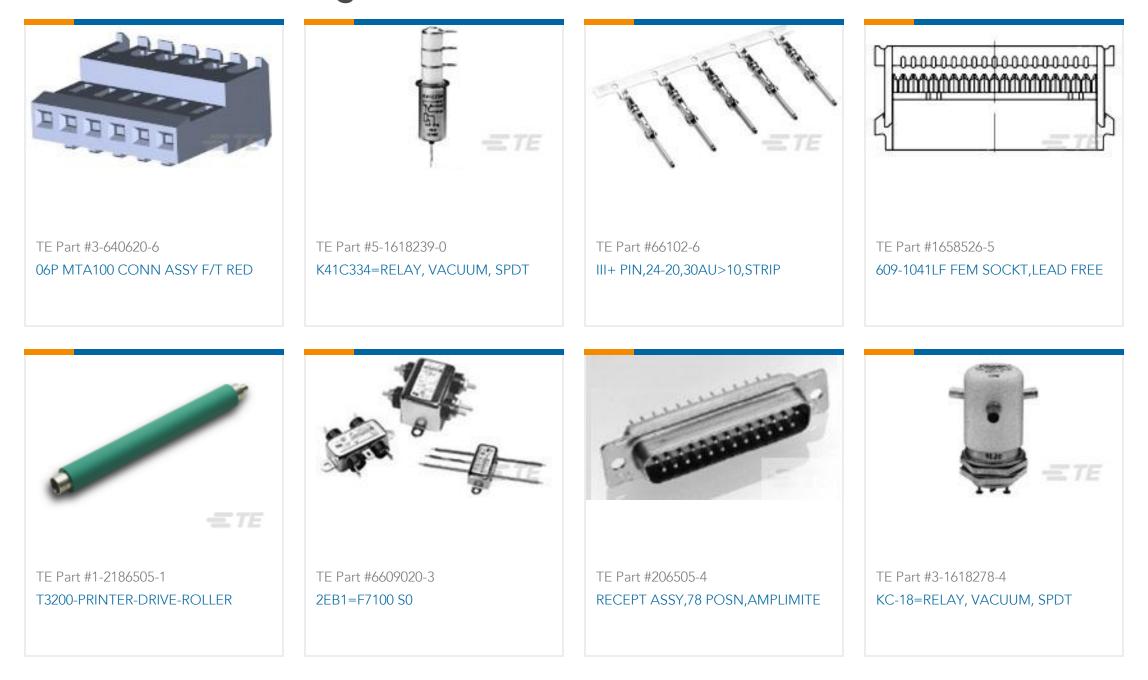

Documents

CAD Files **3D PDF**

C For support call+1 800 522 6752

P40P42A12P1-120



3D

Customer View Model ENG_CVM_CVM_7-1393132-0_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_7-1393132-0_D.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_7-1393132-0_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

P30/P40 Definite Purpose Magnetic Contactor 30/40 Ampere Full Load 40/50 Ampere Resistive AC & DC Coils

English

Product Specifications Definitions General Purpose Relays

English