




Terminals & Splices > Automotive Terminals > MCON Receptacle and Tab

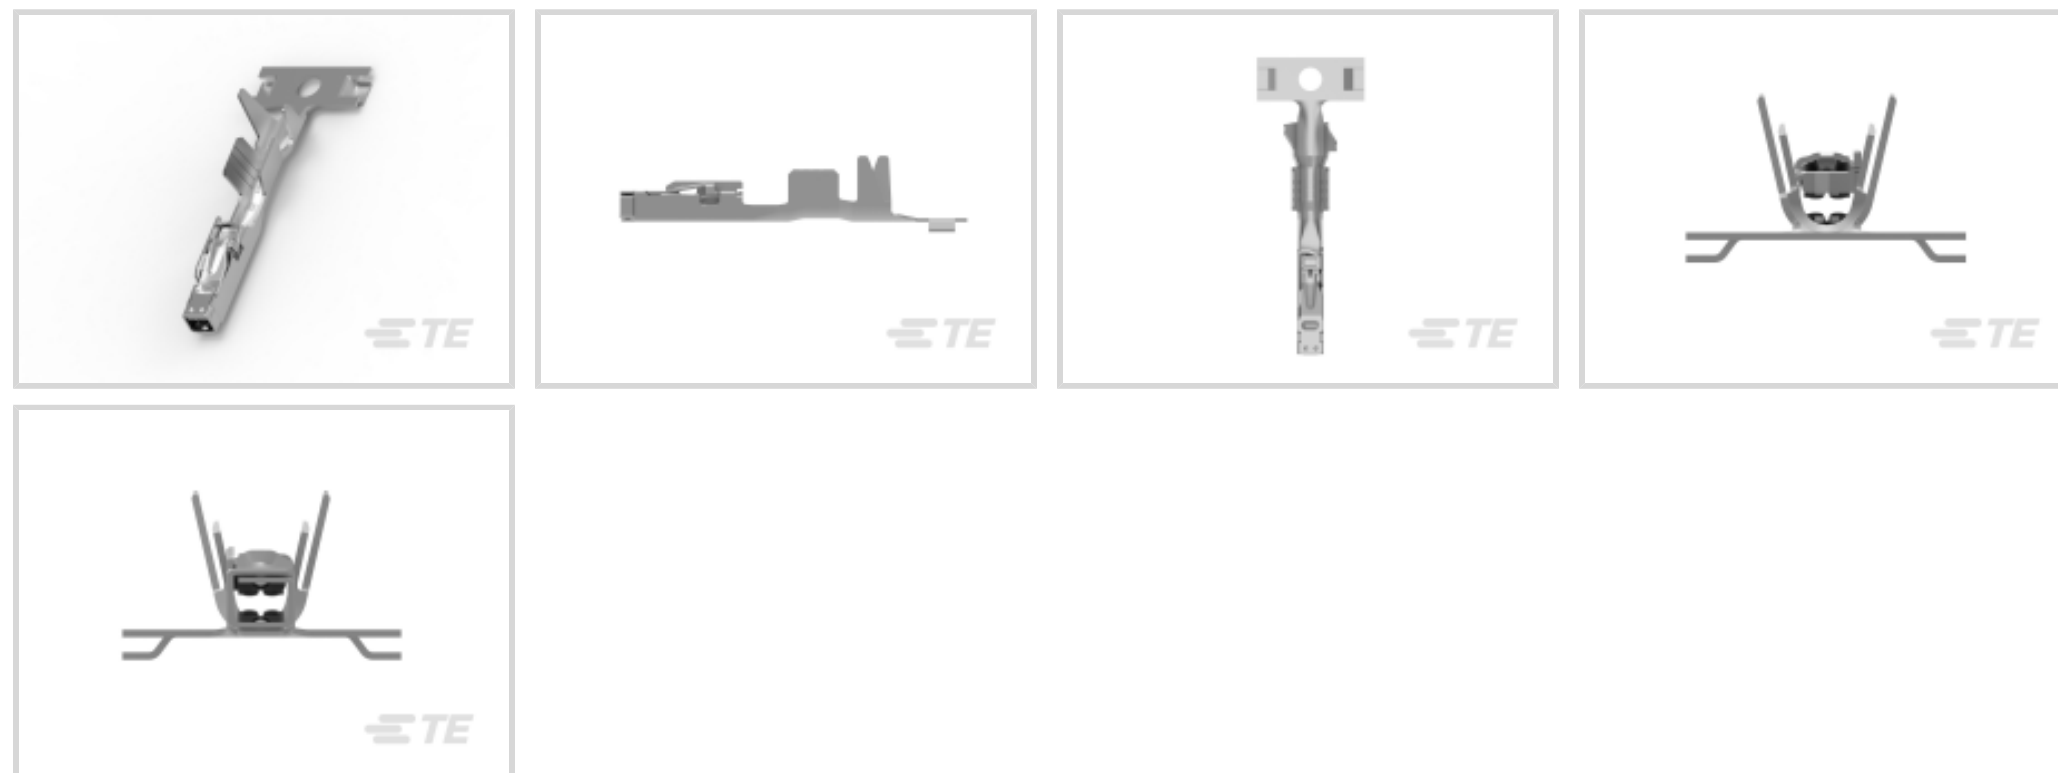

Terminal Type: **Receptacle**

Mating Tab Width: 1.2 mm [.047 in]

Mating Tab Thickness: .6 mm [.024 in]

Terminal Transmits: 25 – 40 A (Power)

Wire Size: 17 – 15 AWG

[All MCON Receptacle and Tab \(103\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Locking Lance

Contact Features

Contact Size	1.2mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	25 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	1.2 mm [.047 in]
Mating Tab Thickness	.6 mm [.024 in]
Interface Plating	Tin (Sn)



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire

Dimensions

Compatible Insulation Diameter Range	1.6 – 2.4 mm [.063 – .094 in]
Wire Size	1 – 1.5 mm ²
Wire Size Search	15 AWG, 16 AWG, 17 AWG

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C [176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C [-40 – 266 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Agency/Standard	LV214
-----------------	-------

Packaging Features

Packaging Quantity	8000
Packaging Method	Reel

Other

Terminal Transmits	25 – 40 A (Power)
--------------------	-------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 5-1579007-3 EXTRACTION TOOL</p>	 <p>TE Part # 2-1670916-1 2POS, MCON 1.2 LL REC SEALED</p>	 <p>TE Part # 1-1670918-1 4POS, MCON 1.2 LL REC SEALED</p>	 <p>TE Part # 1-1670916-1 2POS, MCON 1.2 LL REC SEALED</p>
 <p>TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp</p>	 <p>TE Part # 1-1743447-2 ACTION PIN FOR 1.2mm TAB</p>	 <p>TE Part # 1418762-1 MCON 1.2 LL TAB STC SN</p>	 <p>TE Part # 1563125-1 10POS, MIXED, TAB HSG</p>
 <p>TE Part # 1563123-1 10POS, MIXED, REC HSG</p>	 <p>TE Part # 1-2282337-5 10POS, MCON 1.2 LL REC SEALED 2ROW</p>	 <p>TE Part # 1-2287960-5 4POS, MCON 1.2 LL REC SEALED 2ROW</p>	 <p>TE Part # 1-2287965-5 6POS, MCON 1.2 LL REC SEALED 2ROW</p>




TE Part # 1-2287970-5
8POS, MCON 1.2 LL REC SEALED
2ROW



TE Part # 1-2323170-5
12POS, MCON 1.2 LL REC SEALED
2ROW



TE Part # 2-1670442-9
38POS, MIXED, REC. HSG



TE Part # 2-2287965-5
6POS, MCON 1.2, REC HSG, ASSY, SLD



TE Part # 2-2323170-5
12POS, MCON 1.2 LL REC SEALED
2ROW



TE Part # 2141627-1
4POS MIXED MOS REC




TE Part # 2151353-1
OCEAN_2.0_APPLICATOR-S-
070F090BX




TE Part # 2151353-2
OCEAN_2.0_APPLICATOR-S-
070F090BX


Also in the Series | MCON Interconnection System




Automotive Connector Caps & Covers
(24)

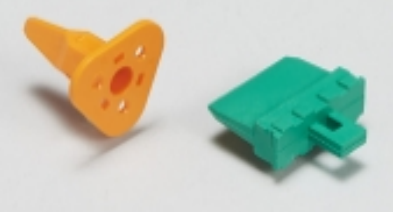


Automotive Connector Locks &
Position Assurance(11)




Automotive Housings(320)

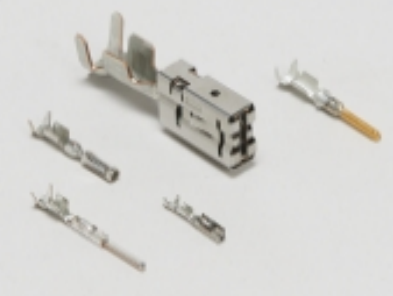


Automotive Terminals(122)



Connector Seals & Cavity Plugs(5)



Insertion & Extraction Tools(31)



Other Automotive Connector
Accessories(7)



PCB Headers & Receptacles(2)

Customers Also Bought



TE Part #968183-1
2.RETAINER



TE Part #7-1452653-1
MCON 1.2 LL REC SRC SN



TE Part #1-2177909-1
MCON 0.5 CB, CONTACT



TE Part #2141884-2
TAB A 1.6x0.6 CONTACT CF SWS Sn



TE Part #6-1379731-3
18pos MQS .63 header 90deg THR



TE Part #1452409-2
SECONDARY LOCK FOR 58 POS
CONN




TE Part #1-969489-2
6POS MQS REC COD A



TE Part #6-928918-3
MQS0,63 Ag tab LL unseal. 0,2-0,35



TE Part #7713783001
ACW0219-2.50-05(NS)

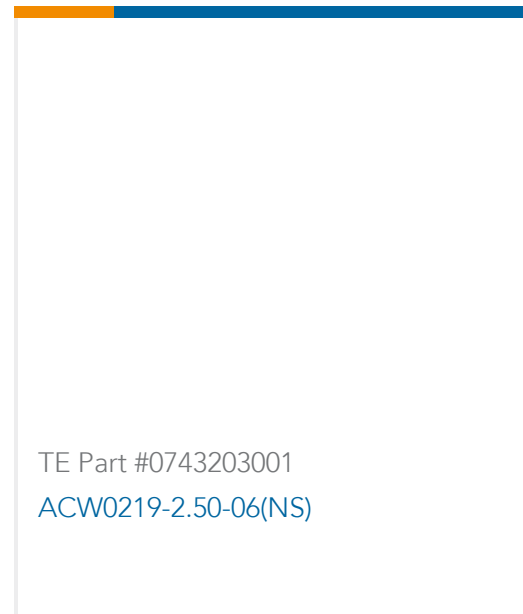

TE Part #0743203001
ACW0219-2.50-06(NS)

Documents

Product Drawings

MCON 1.2 LL REC SRC SN

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_7-1452659-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_7-1452659-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_7-1452659-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

MCON Interconnection System

English

Product Specifications

Application Specification

English

Application Specification

English

7-1452659-1

Automotive Terminals, Receptacle, Mating Tab Width 1.2 mm [.047 in], Tab Thickness .6 mm [.024 in], 17 – 15 AWG Wire Size, MCON Interconnection System

