
## 35221M0JT - ACTIVE

CGS | CGS 3522 TE Internal #: 7-2176230-4 1M  $\Omega$ , Thick Film, Power Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 3 W, ±100 ppm/°C, Solder, 6.35 x 3.2 x .55 mm, CGS 3522 View on TE.com >

Passive Components > Resistors > Surface Mount Resistors

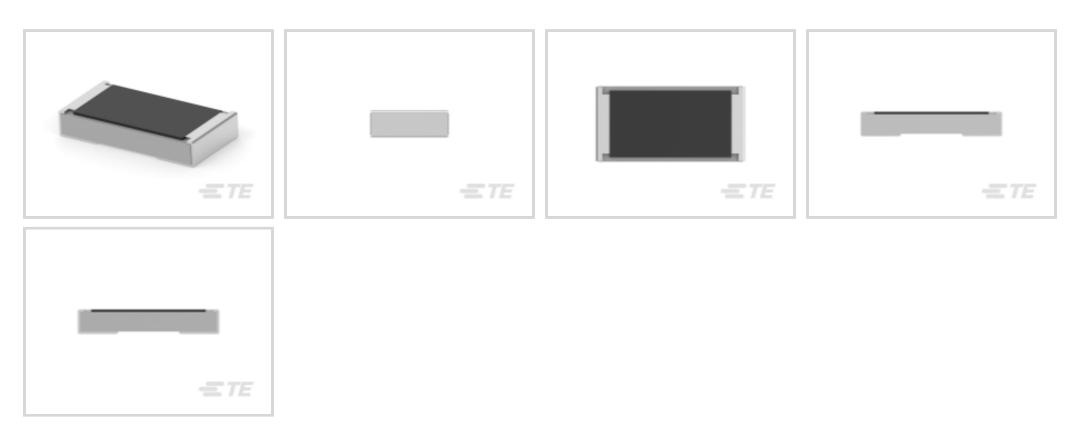

Resistor Type: Power Resistor

Number of Terminations: 2

Package Size Code: 2512

Packaging Method: Taped & Reeled

Passive Component Tolerance: 5%

#### Features

Product Type Features



Product Type	Fixed Resistor
Resistor Type	Power Resistor
Package Size Code	2512
Element Type	Thick Film
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	5 %
Resistance Class	$1M\Omega - 1G\Omega$
Resistance Value	1M Ω
Power Rating	3 W
Termination Features	
Number of Terminations	2
Surface Mount Resistor Termination Type	Solder

#### 35221M0JT

1M Ω, Thick Film, Power Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 3 W, ±100 ppm/°C, Solder, 6.35 x 3.2 x .55 mm, CGS 3522



#### Dimensions

Passive Component Dimensions

#### **Usage Conditions**

Temperature Coefficient

#### Packaging Features

Packaging Method

# ±100 ppm/°C

6.35 x 3.2 x .55 mm

Taped & Reeled

### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

#### Solder Process Capability

#### Reflow solder capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


#### 35221M0JT

1M Ω, Thick Film, Power Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 3 W, ±100 ppm/°C, Solder, 6.35 x 3.2 x .55 mm, CGS 3522






## Also in the Series | CGS 3522

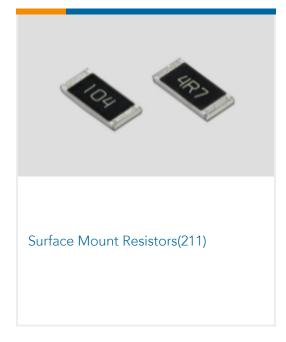

## Customers Also Bought



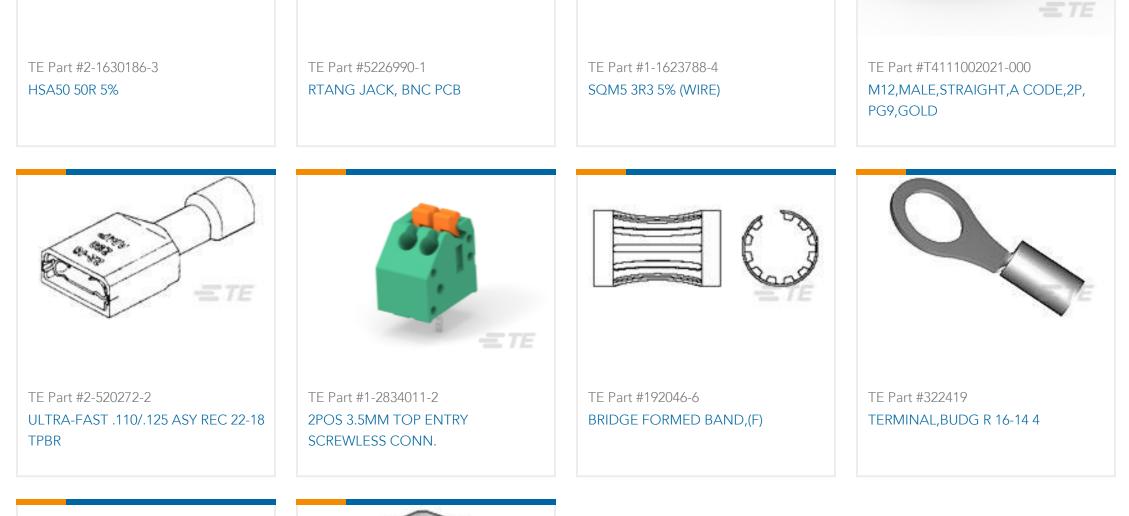



#### 35221M0JT

1M Ω, Thick Film, Power Resistor, 5 %, 2 Termination, 2512, Taped & Reeled, 3 W, ±100 ppm/°C, Solder, 6.35 x 3.2 x .55 mm, CGS 3522



### Documents

Product Drawings 3522 1M0 5% 3W

English

#### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_7-2176230-4\_BA.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_7-2176230-4\_BA.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_7-2176230-4\_BA.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages SMD POWER RESISTORS - TYPE 3522 SERIES

English