# 7-968973-1 <

## AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 7-968973-1 Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMP MCP Unsealed Connector Housings



Connector System: Wire-to-Wire

Number of Positions: 15

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in ]

Sealable: No

### All AMP MCP Unsealed Connector Housings (197)



## Features

### Product Type Features

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	No	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	15	
Number of Rows	3	
Electrical Characteristics		
Operating Voltage	28 VDC	
Nominal Voltage Architecture	12 V, 24 V	

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



## **Body Features**

Cable Exit Angle	180°	
Primary Product Color	Natural	
Connector & Keying Code	В	
Contact Features		
Contact Size	2.8mm	
Contact Type	Receptacle	
Mating Tab Width	2.8 mm[.11 in]	
Mechanical Attachment		
Terminal Position Assurance	Yes	
	Without	
Strain Relief	Without	
Strain Relief Mating Alignment Type	Without Keyed	
Mating Alignment Type	Keyed	
Mating Alignment Type Mating Alignment	Keyed With	
Mating Alignment Type Mating Alignment Connector Mounting Type	Keyed With	

## Dimensions

Connector Height	24 mm[.945 in]	
Product Width	31 mm[1.22 in]	
Product Length	31 mm[1.22 in]	
Row-to-Row Spacing	5.5 mm[.217 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]	
Operation/Application		
Circuit Application	Signal	
Packaging Features		
Packaging Quantity	1200	
Packaging Method	Box	

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



#### Other

Serviceable	No
Connector Position Assurance Capable	No

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




## Also in the Series AMP MCP 2.8

**&** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



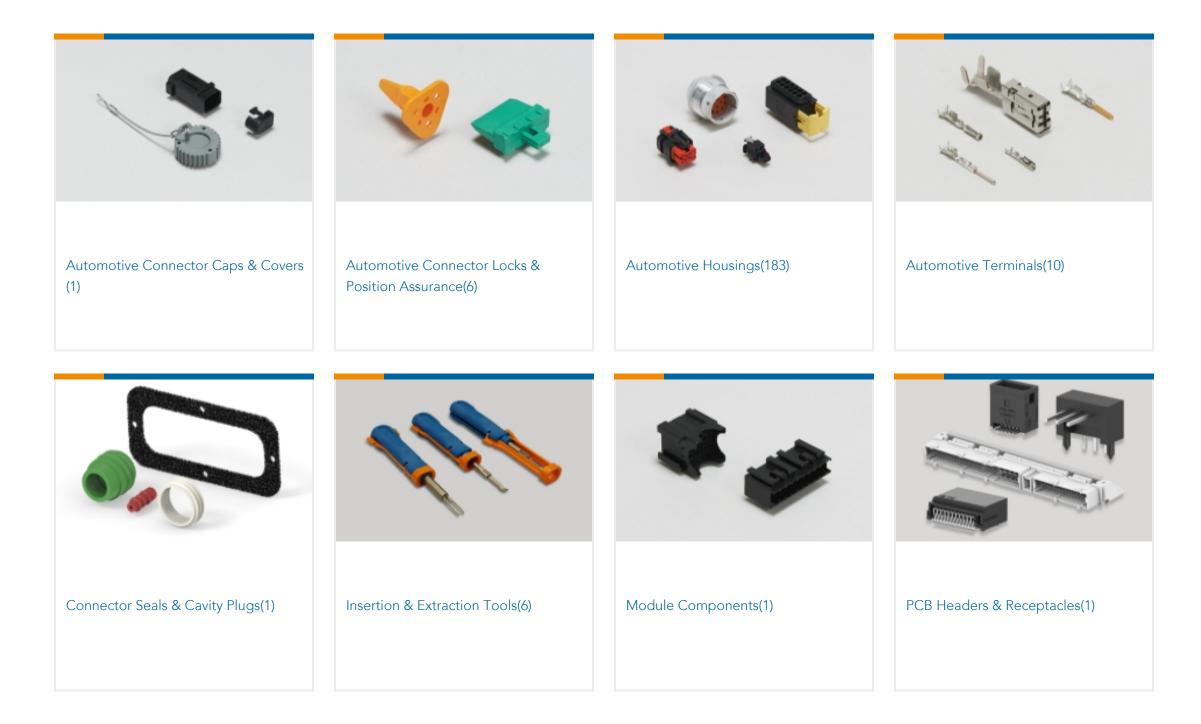

# Also in the Series AMP MCP Connector System




Automotive Connector Caps & Covers (25)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(360)	Automotive Terminals(135)
Connector Seals & Cavity Plugs(7)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(30)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Natural, Signal, Cable Mount (Free-Hanging), Hybrid



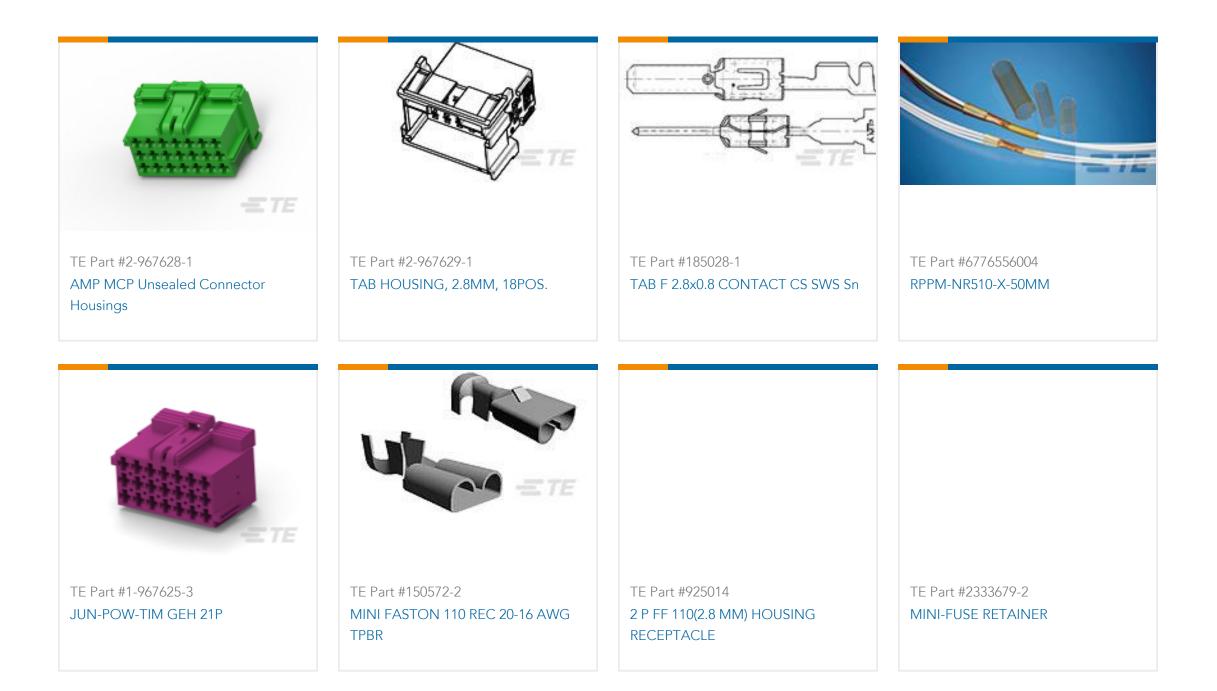

## Documents

Product Drawings AMP MCP 2.8 HSG 15 POS. 2.LOCKING

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_7-968973-1\_F.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_7-968973-1\_F.3d\_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_7-968973-1_F.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English