


## SOLISTRAND

TE Internal #: 726346 Closed Ring Tongue Terminal, 2 AWG, M6 Stud Size, 6.5 mm [.256 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated

# View on TE.com >

Terminals & Splices > Ring Terminals

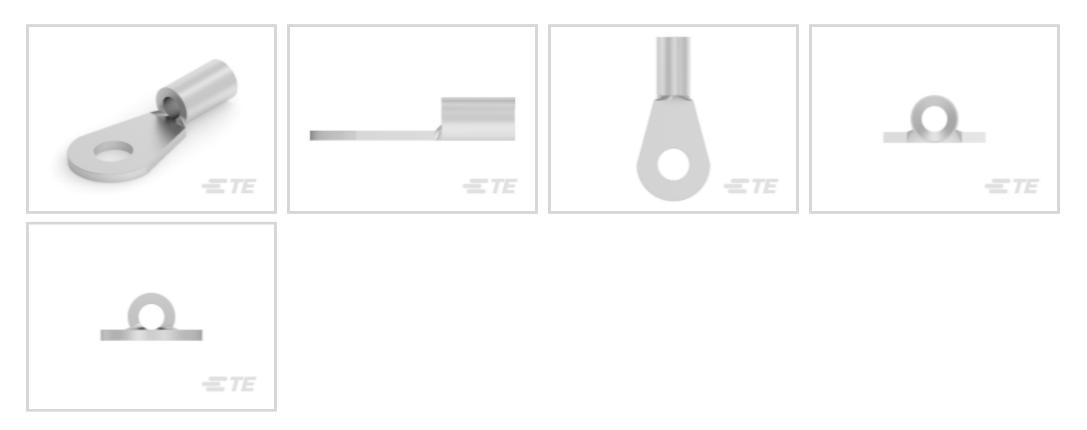

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 34 – 35 mm<sup>2</sup>

Stud Size: M6

Stud Diameter: 6.5 mm [.256 in ]

## Features

## **Product Type Features**



Ring Terminal Product Type	Closed Ring Tongue Terminal				
Stud Size	M6				
Sealable	No				
Wire Insulation Support Retention Type	Non-Insulation Support				
Configuration Features					
Number of Holes	1				
Body Features					
Product Weight	1 g				
Contact Features					
Barrel Type	Closed				
Terminal Orientation	Straight				
Terminal Plating Material	Tin				
Mechanical Attachment					
Wire Insulation Support	Without				
Dimensions					

**C** For support call+1 800 522 6752

## 726346

Closed Ring Tongue Terminal, 2 AWG, M6 Stud Size, 6.5 mm [.256 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



Wire Size	34 – 35 mm²			
Stud Diameter	6.5 mm[.256 in]			
Tongue Thickness	.79 mm[.031 in]			
Product Length	26 mm[1.023 in]			
Usage Conditions				
Insulation Option	Uninsulated			
Operating Temperature Range	170 °C[338 °F]			
Operation/Application				
Compatible With Wire Base Material	Copper			
Compatible With Wire Plating Material	Tin			
Industry Standards				
Government Qualified Terminal	No			
Packaging Features				
Packaging Quantity	250			
Packaging Method	Box			

# Product Compliance

#### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

## 726346

Closed Ring Tongue Terminal, 2 AWG, M6 Stud Size, 6.5 mm [.256 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



# **Customers Also Bought**



Timer Connector Housing	COSI PIN CONTACT HD20 DF; 24-20 AWG	RING TONGUE IS 18-14 0.295 X .940 TPBR	RING TONGUE IS 18-14 AWG .0840 X . 940 BR
	ETE		
TE Part #963709-2 SPT REC 6.3 Contact SRC Sn	TE Part #2-2138650-1 2POS MQS REC COD B	TE Part #1393436-4 V23542C1028B300=KABELBAUMST. 8	TE Part #170002-4 SHUR PLUG 20-14 AWG 0.5 X 11.44 TPBR



# Documents

### Product Drawings

**C** For support call+1 800 522 6752

## 726346

Closed Ring Tongue Terminal, 2 AWG, M6 Stud Size, 6.5 mm [.256 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



SO RINGTONG 6-35

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_726346\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_726346\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_726346\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English