

AMP | AMPSEAL

TE Internal #: 776273-1 Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMPSEAL Receptacle Housings





E TE

Number of Positions: 14

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

All AMPSEAL Receptacle Housings (31)



Features

Product Type Features

Mixed & Hybrid Connector	No			
Connector Shape	Rectangular			
Connector System	Wire-to-Board			
Connector & Housing Type	Housing for Female Terminals			
Sealable	Yes			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Number of Positions	14			
Number of Rows	3			
Electrical Characteristics				
Operating Voltage	250 VAC			
Nominal Voltage Architecture	250 V			
Body Features				

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL



Cable Exit Angle	180°			
Primary Product Color	Black			
Connector & Keying Code	1			
Contact Features				
Contact Size	1.3mm			
Contact Type	Socket			
Mating Pin Diameter	1.3 mm[.051 in]			
Contact Current Rating (Max)	17 A			
Mechanical Attachment				
Terminal Position Assurance	Yes			
Strain Relief	Without			
Mating Alignment Type	Keyed			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Housing Material	PBT GF			
Centerline (Pitch)	4 mm[.157 in]			

Dimensions

Connector Height	34.6 mm[1.362 in]			
Product Width	33.6 mm[1.323 in]			
Product Length	35.4 mm[1.394 in]			
Row-to-Row Spacing	4 mm[.157 in]			
Usage Conditions				
Operating Temperature (Max)	125 °C[257 °F]			
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Industry Standards				
Degree of Protection	IP67, IP69K			
UL Flammability Rating	UL 94V-0			
Packaging Features				
Packaging Quantity	280			

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL



Packaging Method	Box & Tray		
Other			
Serviceable	Yes		
Connector Position Assurance Capable	Yes		

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements:	

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL



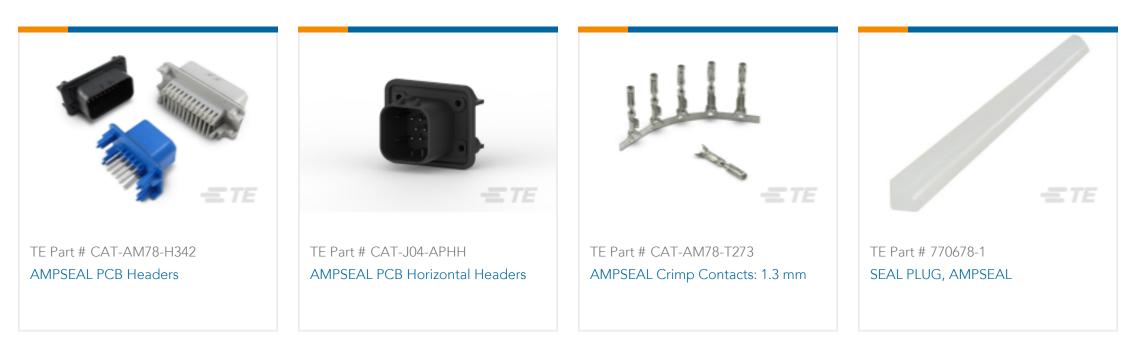



Also in the Series | AMPSEAL





Automotive Housings(31)




tomotive Terminals(8)



onnector Backshells(5)

Automotive Connector Locks &	Automotive Housings(31)	Automotive Terminals(8)	Connector Backshells(5)
Position Assurance(1)			

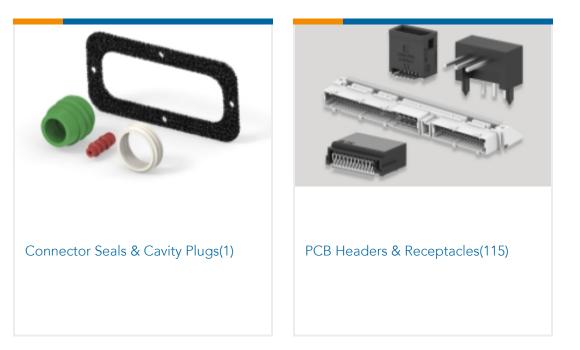

Customers Also Bought



Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL







Documents

Product Drawings

14POS, AMPSEAL, SOC HSG ASSY, SLD, COD 1

English

CAD Files Customer View Model ENG_CVM_CVM_776273-1_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_776273-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_776273-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board, 14 Position, .157 in [4 mm] Centerline, Sealable, Black, Power & Signal, AMPSEAL



Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English