

### FLEXSTRIP | FLEXSTRIP FSN

TE Internal #: 8-1437187-1

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 5 Position, .1 in [2.54 mm] Centerline, Length 50.8 mm [2 in], Printed Circuit Board, FLEXSTRIP FSN

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Jumpers & Shunts



Connector System: Wire-to-Board

Number of Positions: 5

Centerline (Pitch): 2.54 mm [.1 in]
Product Length: 50.8 mm [2 in]

Connector & Contact Terminates To: Printed Circuit Board

### **Features**

#### **Product Type Features**

Troduct Type realures	
Compatible With Discrete Wire Type	Solid
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Conductors	5
Number of Rows	1
Number of Positions	5
Electrical Characteristics	
Impedance	114 Ω
Operating Voltage	300 VAC
Body Features	
Jumper Insulation Material	PTFE



Pin Arrangement (Left)	A
Pin Arrangement (Right)	A
Contact Current Rating (Max)	3 A
Mechanical Attachment	
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Dimensions  Wire Size	.204 mm²
	.204 mm <sup>2</sup> 50.8 mm[2 in]
Wire Size	
Wire Size Product Length	
Wire Size  Product Length  Usage Conditions	50.8 mm[2 in]

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts

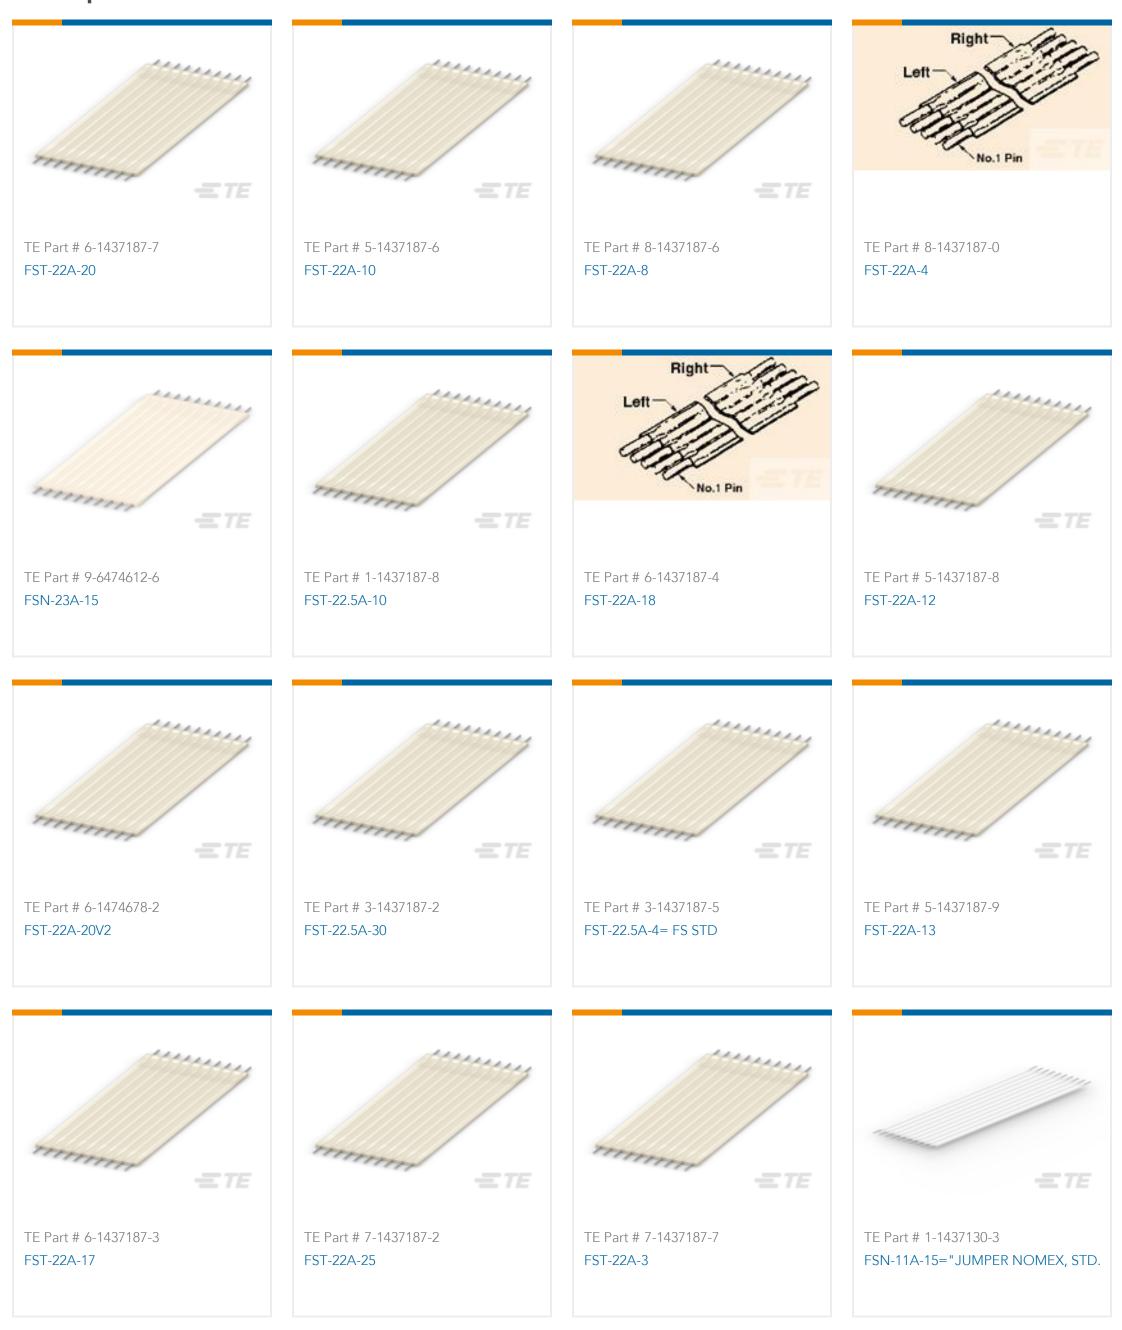












## Also in the Series | FLEXSTRIP FSN







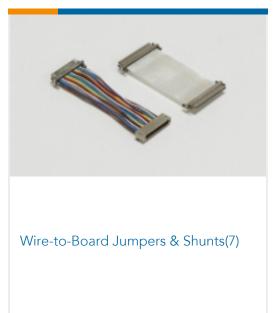

# Customers Also Bought



TE Part #54010-1 CPC STRAIN RELIEF,SIZE 11



TE Part #6609987-7 15SRB1-Y=F8219F



TE Part #7-2176070-1 3521 8K2 1% 2W






TE Part #5-102203-3 06 MODII HDR SRRA SHRD LF



TE Part #6-160430-6 187 FASTON REC 20-16 AWG BR



TE Part #5787956-1 SOCKET ASSY IEEE1394

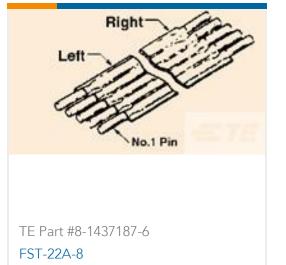





### **Documents**

**Product Drawings** 

FST-22A-5

English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English

Agency Approvals

**UL Report** 

English