
8-53406-1 O DO NOT USE FOR NEW DESIGN

PIDG

TE Internal #: 8-53406-1 Closed Ring Tongue Terminal, 22 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG View on TE.com >

Terminals & Splices > Ring Terminals > PIDG Radiation Resistant C Rings/Spades

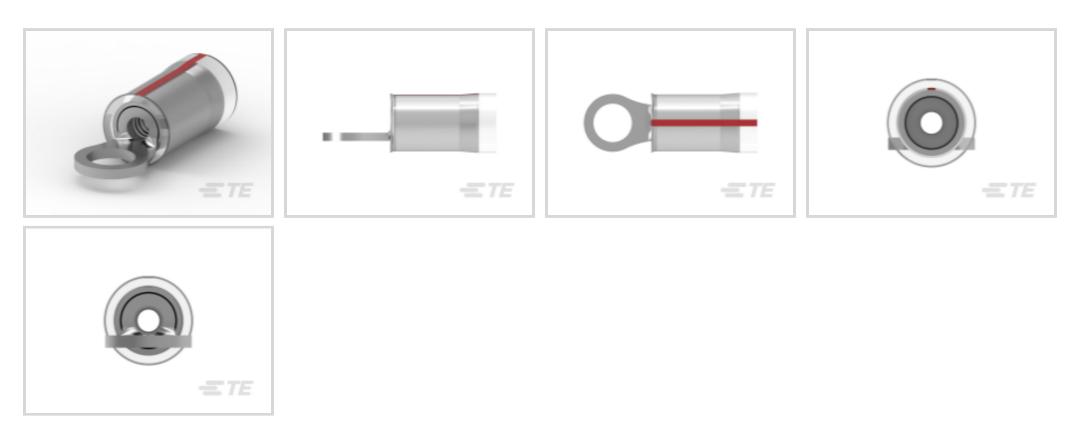

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: #6, M3.5

All PIDG Radiation Resistant C Rings/Spades (39)

Features

Product Type Features



Ring Terminal Product Type	Closed Ring Tongue Terminal				
Stud Size	#6, M3.5				
Sealable	No				
Wire Insulation Support Retention Type	Insulation Support				
Configuration Features					
Number of Holes	1				
Body Features					
Insulation Sleeve Color	Natural				
Contact Features					
Barrel Type	Closed				
Terminal Orientation	Straight				
Terminal Plating Material	Tin-Lead				
Mechanical Attachment					
Wire Insulation Support	With				

C For support call+1 800 522 6752

Closed Ring Tongue Terminal, 22 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



Dimensions

Wire Size	509 – 3260 CMA					
Stud Diameter	3.68 mm[.145 in]					
Tongue Thickness	.79 mm[.031 in]					
Product Length	17.07 mm[.672 in]					
Compatible Insulation Diameter (Max)	3.18 mm[.125 in]					
Compatible Insulation Diameter Range	2.03 – 3.18 mm[.08 – .125 in]					
Usage Conditions						
Insulation Option	Partially Insulated					
Operating Temperature Range	150 °C[302 °F]					
Operation/Application						
Compatible With Wire Base Material	Copper					
Compatible With Wire Plating Material	Tin					
Industry Standards						
Government Qualified Terminal	No					
Packaging Features						
Packaging Quantity	100					

Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant		
EU ELV Directive 2000/53/EC	Compliant with Exemptions		
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.		
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.		
Solder Process Capability	Not applicable for solder process capability		

C For support call+1 800 522 6752

Closed Ring Tongue Terminal, 22 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | PIDG



Compression Connectors(17)	Crimp Terminal Housings(1)	Crimp Wire Pins, Tabs & Ferrules(41)	Hand Crimping Tools(2)
		A CONTRACTOR OF	
Knife Disconnects(11)	PCB Terminals(7)	Quick Disconnects(49)	Ring Terminals(607)

Closed Ring Tongue Terminal, 22 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG




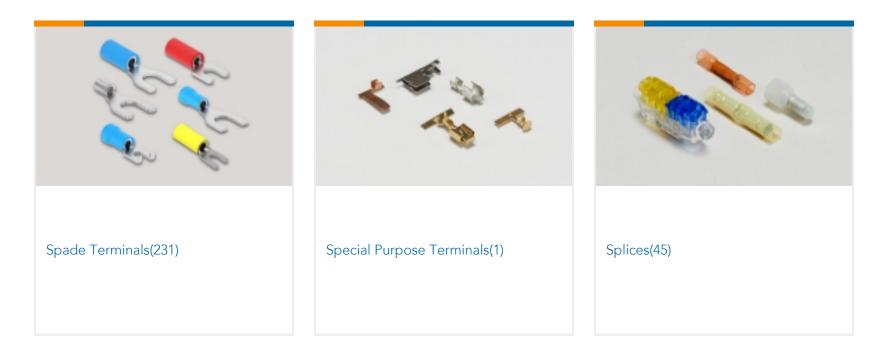

Customers Also Bought



06P EP-II HOUSING, NATURAL	EP-II CONTACT LANCELESS, 22-18	40 NOVO MIL/CTR 15DP, LEAD FREE	Std HDMI, Flag, T/H

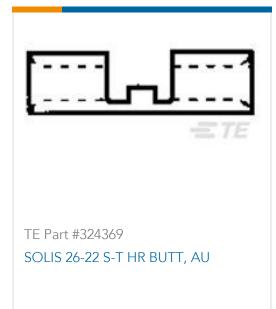

Documents

Product Drawings PIDG PVF2 R 22-16COM22-18MIL 6

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_8-53406-1_L.2d_dxf.zip

Closed Ring Tongue Terminal, 22 AWG, #6 / M3.5 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Tin-Lead, PIDG



English

Customer View Model ENG_CVM_8-53406-1_L.3d_igs.zip

English

Customer View Model

ENG_CVM_8-53406-1_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RADIATION_RESISTANT_PRE-INSULATED_TERMINALS_SPLICES

English

Product Specifications Application Specification

English