TE Internal #: 8-55824-2


Splices, Butt Splice, 22 – 18 AWG Wire Size, .3 – .9 mm² Wire Size, Sealable, .17 in [4.32 mm] Barrel Inside Diameter, 509 – 1900 CMA

Wire Size

View on TE.com >



Terminals & Splices > Splices

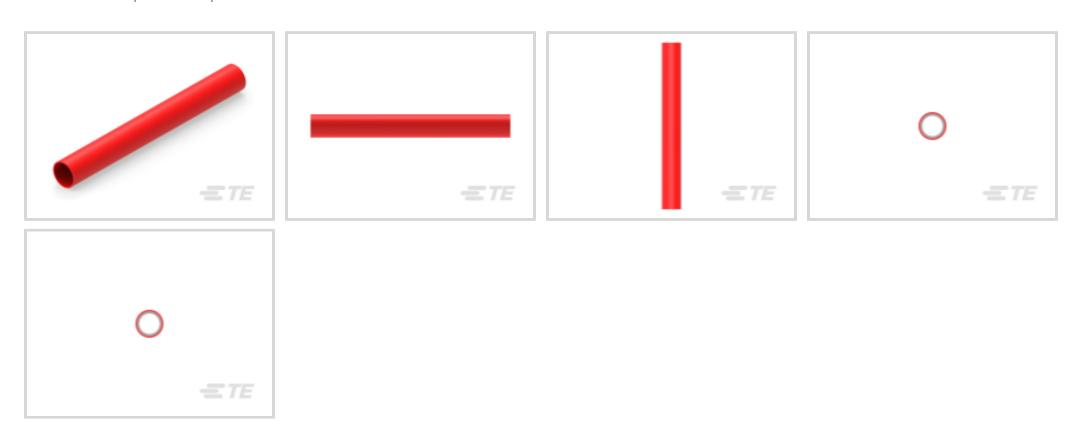

Wire Size: .3 – .9 mm²

Sealable: Yes

Compatible Insulation Diameter Range: 4.32 mm [.17 in]

Barrel Inside Diameter: 4.32 mm [.17 in]

Features

Product Type Features

Sealable	Yes
Splice Type	Butt Splice
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.002 g
Insulation Material	Polyolefin
Primary Product Color	Red

Contact Features

Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Mechanical Attachment



Wire Insulation Support	With
Dimensions	
Wire Size	509 – 1900 CMA
Compatible Insulation Diameter Range	4.32 mm[.17 in]
Barrel Inside Diameter	4.32 mm[.17 in]
Product Length	40.79 mm[1.606 in]
Usage Conditions	
Insulation Option	Fully Insulated
Insulation Option Operating Temperature Range	Fully Insulated -55 – 125 °C[-67 – 257 °F]
Operating Temperature Range	
Operating Temperature Range Industry Standards	-55 – 125 °C[-67 – 257 °F]
Operating Temperature Range Industry Standards Government Qualified Splice	-55 – 125 °C[-67 – 257 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



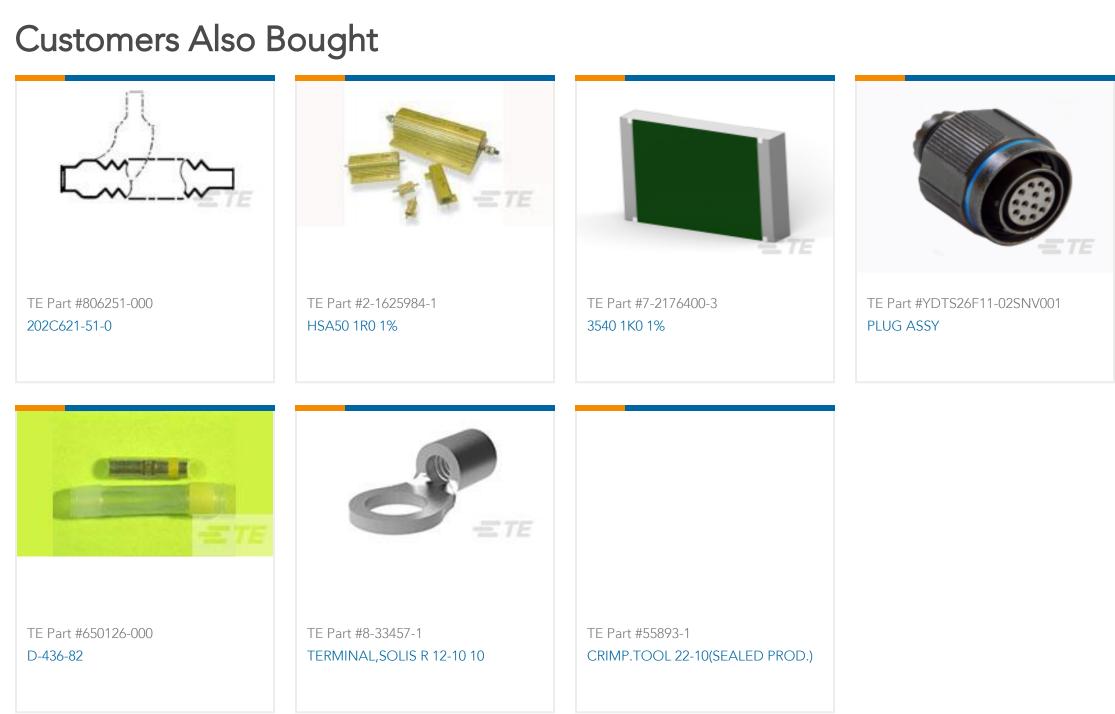

Documents

Product Drawings

22-18 PRE-INSUL SEALED SPLICE

English

CAD Files

Customer View Model

ENG_CVM_CVM_8-55824-2_G.2d_dxf.zip

English

3D PDF

3D

Customer View Model



ENG_CVM_CVM_8-55824-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-55824-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (U.S.)

English