8-968972-2 - ACTIVE

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 8-968972-2 Housing for Female Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP MCP Unsealed Connector Housings



Connector System: Wire-to-Wire

Number of Positions: **12**

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All AMP MCP Unsealed Connector Housings (197)

Features

Product Type Features

Mixed & Hybrid Connector	No			
Connector Shape	Rectangular			
Connector System	Wire-to-Wire			
Connector & Housing Type	Housing for Female Terminals			
Sealable	No			
Primary Locking Feature	On the Terminal			
Configuration Features				
Number of Positions	12			
Number of Rows	3			
Electrical Characteristics				
Operating Voltage	28 VDC			
Nominal Voltage Architecture	12 V, 24 V			
Body Features				
Cable Exit Angle	180°			
Primary Product Color	Gray			
Connector & Keying Code	A			
Contact Features				

Housing for Female Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



Contact Size	2.8mm	
Contact Type	Receptacle	
Mating Tab Width	2.8 mm[.11 in]	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	PBT GF	
Centerline (Pitch)	5 mm[.197 in]	
Dimensions		
Connector Height	24 mm[.945 in]	
Product Width	26 mm[1.024 in]	
Product Length	26 mm[1.024 in]	

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]	
Operation/Application		
Circuit Application	Signal	
Packaging Features		
Packaging Quantity	1500	
Packaging Method	Carton	
Other		
Serviceable	No	
Connector Position Assurance Capable	No	

Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Female Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid




EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

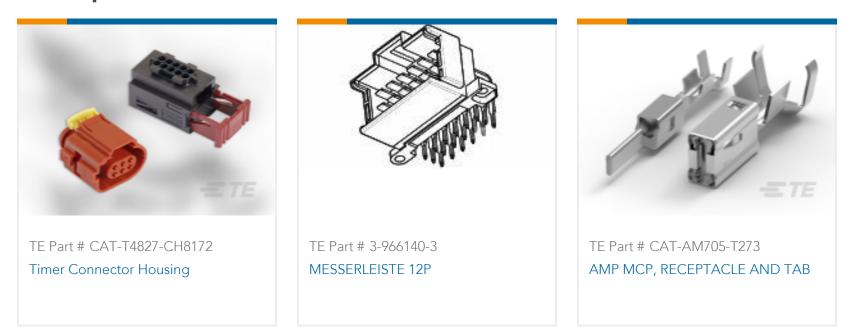

Also in the Series | AMP MCP 2.8

Housing for Female Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



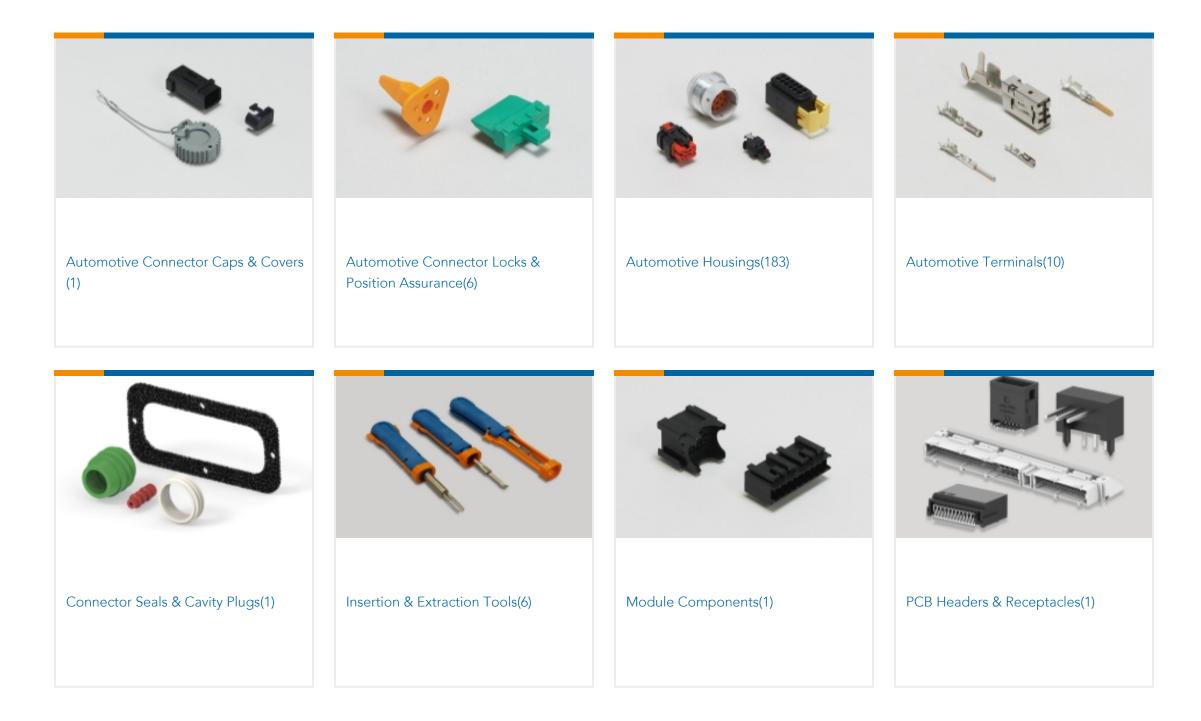

Also in the Series AMP MCP Connector System




Automotive Connector Caps & Covers (25)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(360)	Automotive Terminals(135)
Connector Seals & Cavity Plugs(6)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(3)	PCB Headers & Receptacles(30)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 12 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



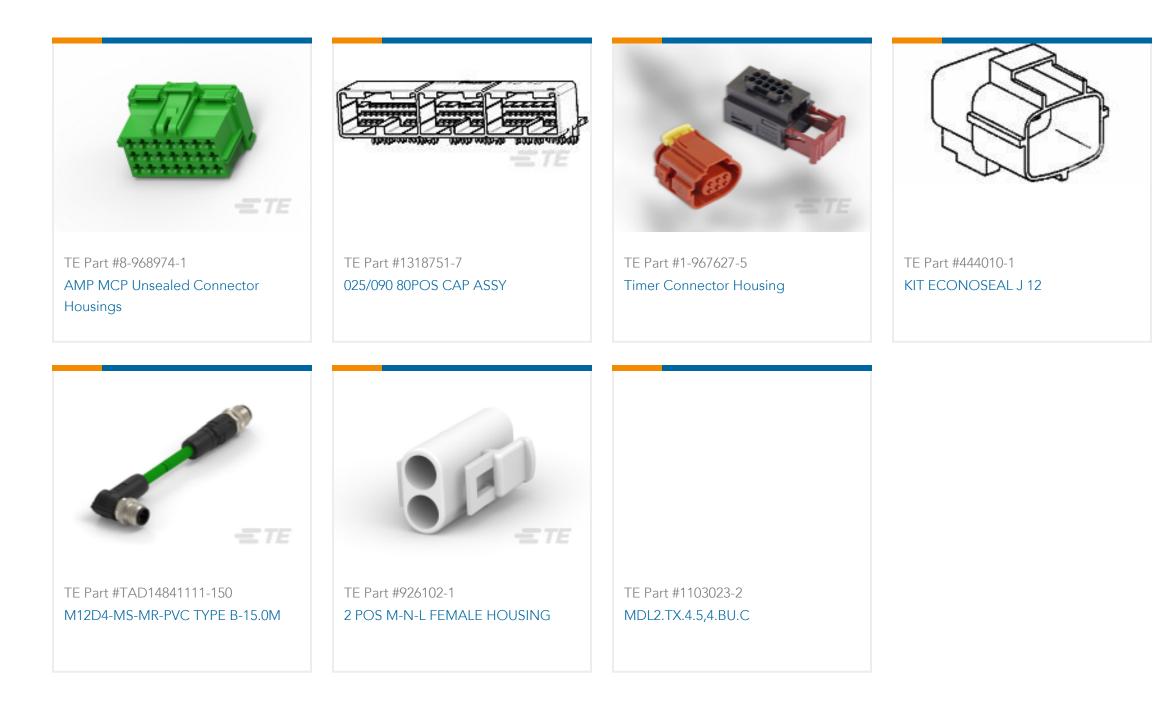

Documents

Product Drawings MCP2.8 GEH ASSY 12P English

MCP2.8 GEH ASSY 12P

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_8-968972-2_F.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_8-968972-2_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-968972-2_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English