

MEAS | MEAS 85 Series TE Internal #: 85-300G-0U TE Internal Description: 300 PSIG WELDABLE PRESSURE SENSOR Pressure Sensor, MV Output, 13 mm

View on TE.com >

Sensors > Pressure Sensors > Media Isolated Pressure Sensors > Pressure Sensor, MV Output, 13 mm



Pressure: [300 psi]

Media Isolated Pressure Sensor Type: Media Isolated mV Output Pressure Sensors

Media Isolated Pressure Sensor Style: Gauge

Output/Span: 100mV

Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

All Pressure Sensor, MV Output, 13 mm (5)

Features

Product Type Features

Media Isolated Pressure Sensor Type

Media Isolated Pressure Sensor Style

Media Isolated mV Output Pressure Sensors

Gauge



	. /	

C C		F .
Contio	Juration	Features

Electrical Connection	Wire Leads
Pressure Port/Fitting	Weldable (5/16-32 UNEF-3A Thread)
Electrical Characteristics	
Supply Current	1.5 mA
Dimensions	
Dimensions	Dia 15.85 x 9.3 mm[Dia .624 x .366 in]
Usage Conditions	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Proof Pressure Range	3X
	300 psi
Output/Span	100mV
Packaging Features	

C For support call+1 800 522 6752



Media Isolated Pressure Sensor Package	Threaded Process Fittings, Weldable
Other	
Non-Linearity	± .1 %
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | MEAS 85 Series


C For support call+1 800 522 6752

300 PSIG WELDABLE PRESSURE SENSOR



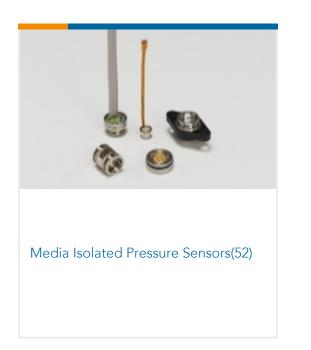

Customers Also Bought

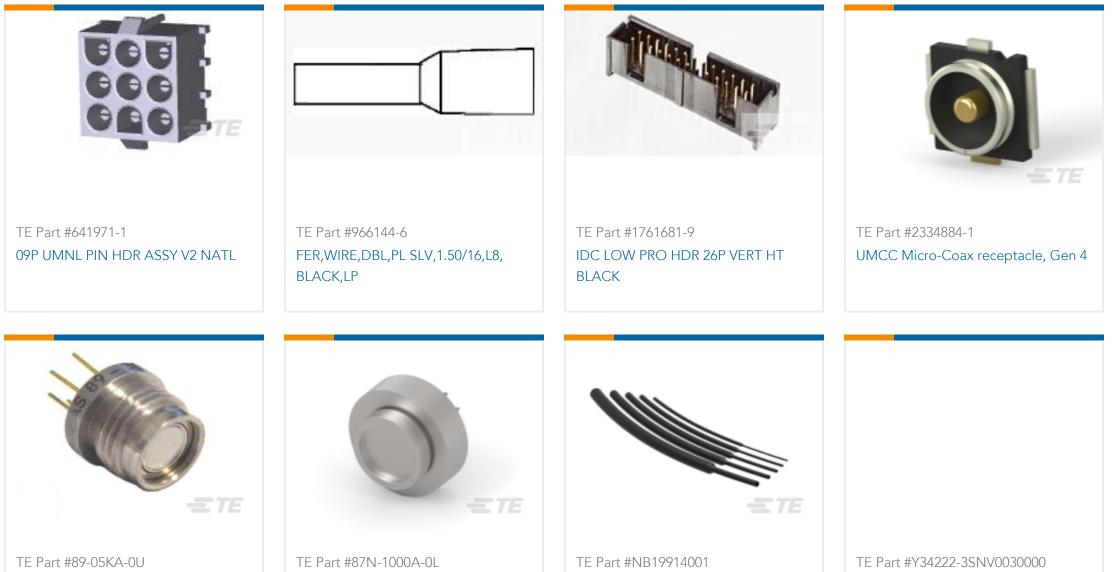

9MM MV OUTPUT PRESSURE SENSOR	1000PSIA MV PRESSURE SENSOR W /LEAD WIRES	VERSAFIT-1/16-0-SP	HERM RECP
TE Part #85-500G-0U NISO,NO FIT,UNCOMP			
Documents			
CAD Files			
3D PDF			
3D			
Customer View Model ENG_CVM_CVM_85-300G-0L	J_D.2d_dxf.zip		
English			

Customer View Model

ENG_CVM_CVM_85-300G-0U_D.3d_igs.zip



English

Customer View Model ENG_CVM_CVM_85-300G-0U_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

85U

English