

MEAS | MEAS 89 Series

TE Internal #: 89-05KS-4R

TE Internal Description: 5K PSIS 316L MV RIBBON PRESSURE

SENSOR

9MM MV OUTPUT PRESSURE SENSOR

View on TE.com >



Sensors > Pressure Sensors > Media Isolated Pressure Sensors > 9MM MV OUTPUT PRESSURE SENSOR



Pressure: [5000 psi]

Media Isolated Pressure Sensor Type: Media Isolated mV Output Pressure Sensors

Media Isolated Pressure Sensor Style: Sealed Gauge

Output/Span: 125 mV

Operating Temperature Range: -40 - 125 °C [-40 - 257 °F]

All 9MM MV OUTPUT PRESSURE SENSOR (11)

Features

Product Type Features

Media Isolated Pressure Sensor Type	Media Isolated mV Output Pressure Sensors
Media Isolated Pressure Sensor Style	Sealed Gauge

Configuration Features

Electrical Connection	Ribbon Cable
Pressure Port/Fitting	1/4-18 NPT (5/8 Hex)

Electrical Characteristics

Supply Current	1.5 mA	
----------------	--------	--

Dimensions

n]
ir

Usage Conditions

On a vating at Tarana a vaturus Danasa	40 105 905 40 057 951
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]

Operation/Application

Proof Pressure Range	3X
	5000 psi
Output/Span	125 mV



Packaging Features

Media Isolated Pressure Sensor Package	Threaded Process Fittings
Other	
Non-Linearity	± .25 %

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | MEAS 89 Series



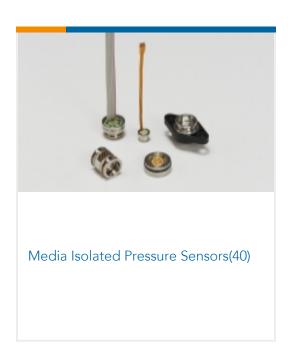

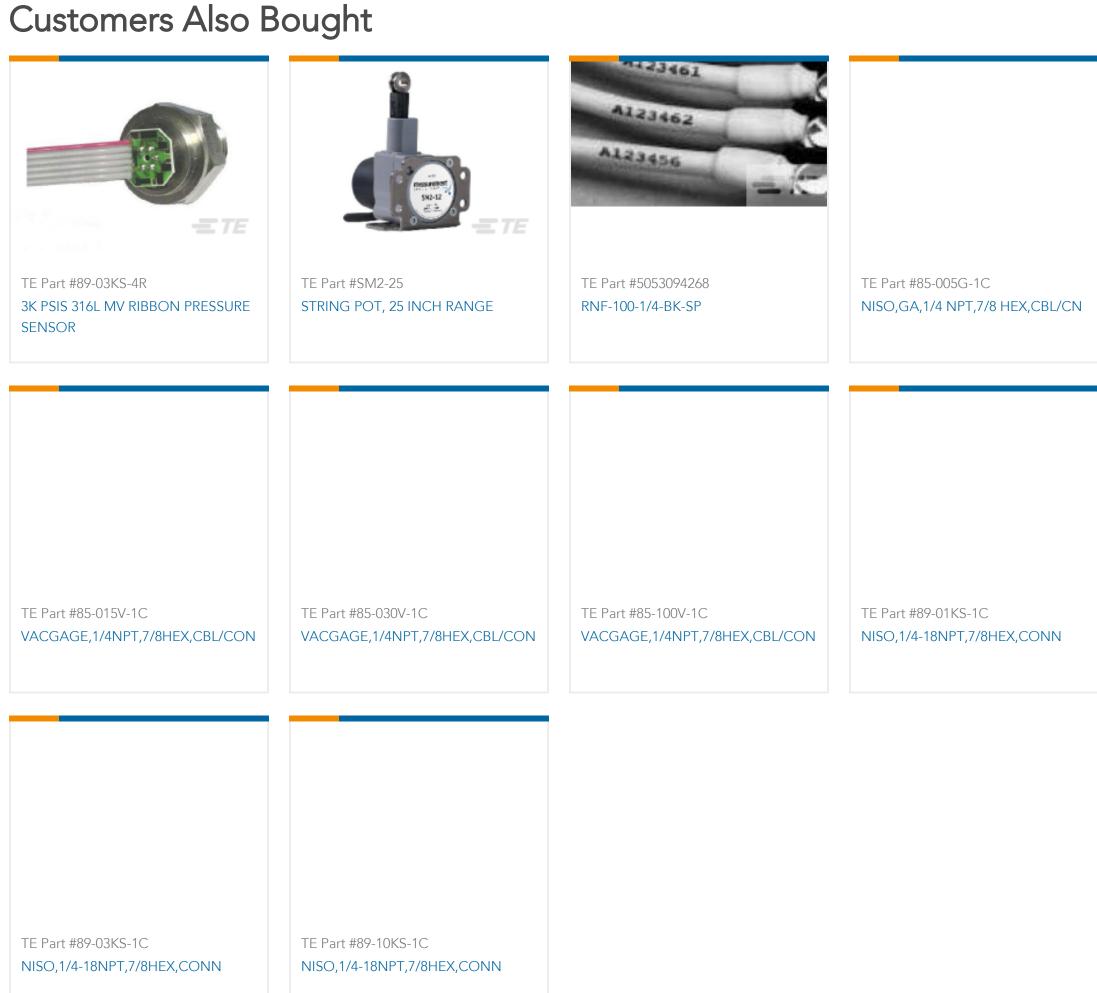

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_89-05KS-4R_B1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_89-05KS-4R_B1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_89-05KS-4R_B1.3d_igs.zip



English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

89C

English