
# 9-1377174-5 - ACTIVE

### PIDG

TE Internal #: 9-1377174-5 Quick Disconnects, Receptacle, 15.5 – 13.5 AWG Wire Size, 1.5 – 2.5 mm<sup>2</sup> Wire Size, 2960 – 4933 CMA Wire Size, Mating Tab Width 2.8 mm [.11 in], PIDG

#### View on TE.com >

Terminals & Splices > Quick Disconnects

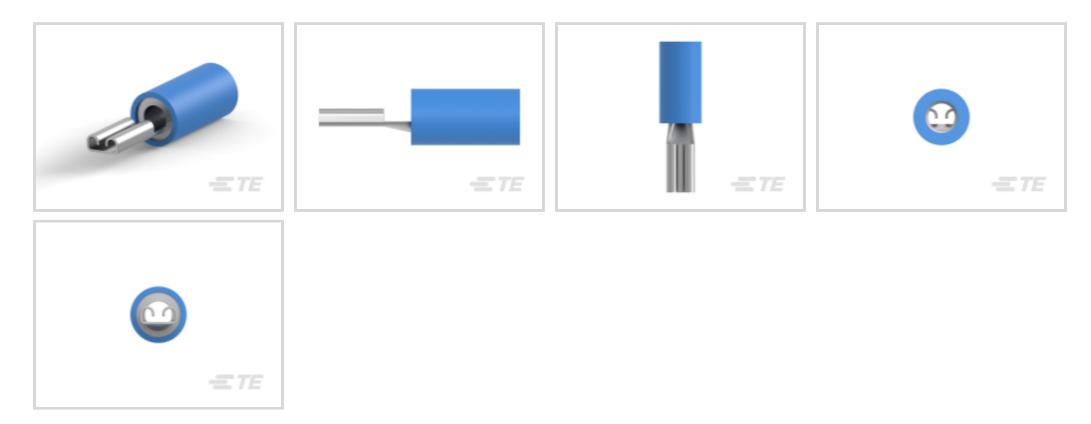

Quick Disconnect Terminal Type: Receptacle

Wire Size: 2960 – 4933 CMA

Mating Tab Width: 2.8 mm [.11 in ]

# Features

### **Product Type Features**

Insertion Force	Normal		
Electrical Characteristics			
Voltage Rating	300 V		
Body Features			
Insulation Material	Nylon		
Contact Features			
Quick Disconnect Terminal Type	Receptacle		
Mating Tab Width	2.8 mm[.11 in]		
Mating Tab Thickness	.51 mm[.02 in]		
Terminal Orientation	Straight		
Contact Base Material	Brass		
Terminal Plating Material	Tin		
Crimp Type	Compression		
Barrel Type	Closed		
Mechanical Attachment			



**C** For support call+1 800 522 6752

# 9-1377174-5

Quick Disconnects, Receptacle, 15.5 – 13.5 AWG Wire Size, 1.5 – 2.5 mm<sup>2</sup> Wire Size, 2960 – 4933 CMA Wire Size, Mating Tab Width 2.8 mm [.11 in], PIDG



Wire Insulation Support	With	
Mating Retention Type	Dimple	
Dimensions		
Compatible Insulation Diameter Range	4.29 mm[.169 in]	
Wire Size	2960 – 4933 CMA	
Usage Conditions		
Insulation Option	Partially Insulated	
Operating Temperature Range	105 °C[221 °F]	
Packaging Features		
Packaging Quantity	50	
Packaging Method	Box	
Other		
Barrel Color	Blue	
Terminals & Splices Comment	Bulk number 165616-2.	

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Colder Process Consolities	Not applicable for colder process capability	

#### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits as defined in the Annexes of Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

## 9-1377174-5

Quick Disconnects, Receptacle, 15.5 – 13.5 AWG Wire Size, 1.5 – 2.5 mm<sup>2</sup> Wire Size, 2960 – 4933 CMA Wire Size, Mating Tab Width 2.8 mm [.11 in], PIDG



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



# Also in the Series | PIDG




		and the second second	
Knife Disconnects(11)	PCB Terminals(7)	Quick Disconnects(49)	Ring Terminals(611)
and the second			
Spade Terminals(233)	Special Purpose Terminals(1)	Splices(46)	

Customers Also Bought

## 9-1377174-5

Quick Disconnects, Receptacle, 15.5 – 13.5 AWG Wire Size, 1.5 – 2.5 mm<sup>2</sup> Wire Size, 2960 – 4933 CMA Wire Size, Mating Tab Width 2.8 mm [.11 in], PIDG



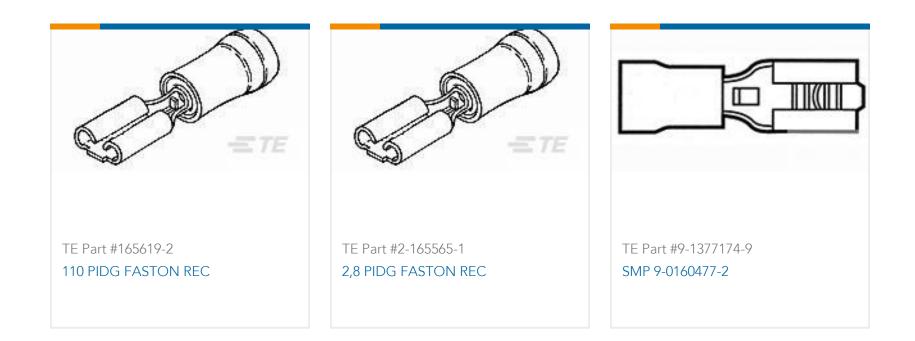

# Documents

# **Product Drawings** SMP 0-0165616-2

English

#### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_9-1377174-5\_C1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_9-1377174-5\_C1.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_9-1377174-5\_C1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages RADIATION\_RESISTANT\_PRE-INSULATED\_TERMINALS\_SPLICES

English

**Product Specifications** 

**Application Specification** 

English