

Neohm | Neohm ROX

TE Internal #: 9-2176415-3


200K Ω , Metal Oxide Film, General Purpose Resistor, 5 %, 41 x 8.5 mm, 2 Termination, Box, 8 W, ± 350 ppm/°C, Tinned Copper Leads

Termination, Neohm ROX

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors

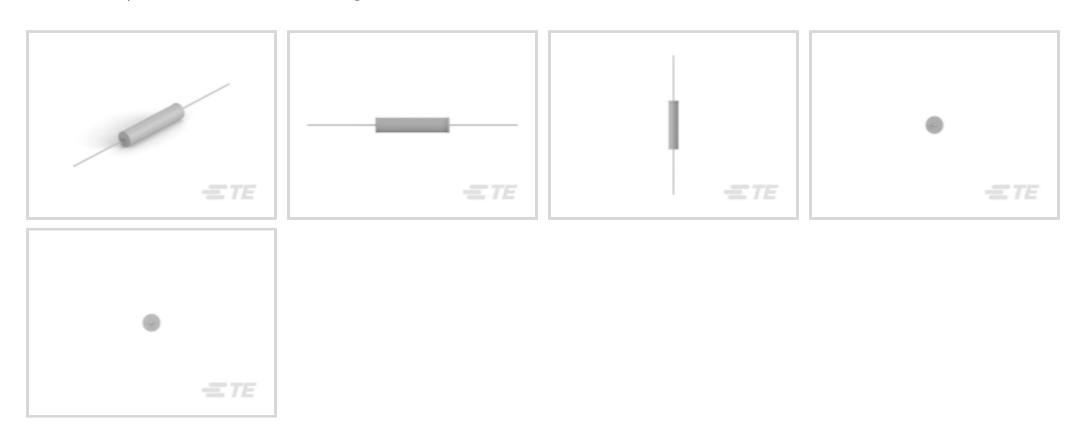

Resistor Type: General Purpose Resistor

Passive Component Dimensions: 41 x 8.5 mm

Number of Terminations: 2
Packaging Method: Box

Passive Component Tolerance: 5%

Passive Component Lead Type

Features

Product Type Features

Product TypeFixed ResistorResistor TypeGeneral Purpose ResistorElement TypeMetal Oxide FilmConfiguration FeaturesNumber of Resistors1Electrical CharacteristicsVoltage Rating750 VPassive Component Tolerance5 %Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200K \Omega$ Power Rating8 WBody Features		
Element TypeMetal Oxide FilmConfiguration Features1Number of Resistors1Electrical Characteristics750 VPassive Component Tolerance5 %Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200K\Omega$ Power Rating8 W	Product Type	Fixed Resistor
Configuration FeaturesNumber of Resistors1Electrical Characteristics750 VVoltage Rating750 VPassive Component Tolerance5 %Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200K\Omega$ Power Rating8 W	Resistor Type	General Purpose Resistor
Number of Resistors 1 Electrical Characteristics Voltage Rating 750 V Passive Component Tolerance 5 % Resistance Class $1 \text{k}\Omega - 1 \text{M}\Omega$ Resistance Value 200K Ω Power Rating 8 W	Element Type	Metal Oxide Film
Electrical CharacteristicsVoltage Rating 750 V Passive Component Tolerance 5% Resistance Class $1 \text{k}\Omega - 1 \text{M}\Omega$ Resistance Value $200 \text{K} \Omega$ Power Rating 8 W	Configuration Features	
Voltage Rating 750 V Passive Component Tolerance 5% Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200 \text{K} \Omega$ Power Rating 8 W	Number of Resistors	1
Passive Component Tolerance5 %Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200K \Omega$ Power Rating8 W	Electrical Characteristics	
Resistance Class $1k\Omega - 1M\Omega$ Resistance Value $200K \Omega$ Power Rating $8 \ W$	Voltage Rating	750 V
Resistance Value $200 \text{K}\Omega$ Power Rating 8W	Passive Component Tolerance	5 %
Power Rating 8 W	Resistance Class	1kΩ - 1MΩ
	Resistance Value	200Κ Ω
Body Features	Power Rating	8 W
	Body Features	

Axial-Leaded



Termination Features

Number of Terminations	2
Passive Component Termination Material Type	Tinned Copper Leads
Dimensions	
Passive Component Dimensions	41 x 8.5 mm
Usage Conditions	
Operating Temperature Range	-55 – 155 °C
Temperature Coefficient	±350 ppm/°C
Packaging Features	
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

200K Ω , Metal Oxide Film, General Purpose Resistor, 5 %, 41 x 8.5 mm, 2 Termination, Box, 8 W, ± 350 ppm/°C, Tinned Copper Leads Termination, Neohm ROX















Also in the Series | Neohm ROX

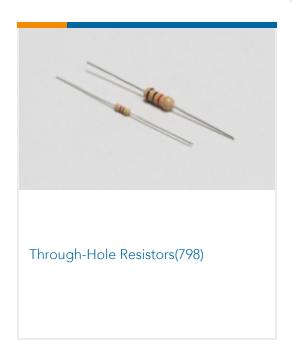

Customers Also Bought



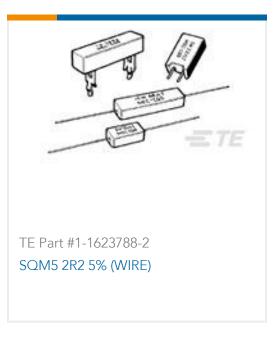









200K Ω , Metal Oxide Film, General Purpose Resistor, 5 %, 41 x 8.5 mm, 2 Termination, Box, 8 W, ± 350 ppm/°C, Tinned Copper Leads Termination, Neohm ROX



Documents

Product Drawings

8W STD M/OX 5% 200K

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_9-2176415-3_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_9-2176415-3_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_9-2176415-3_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Flame Proof Power Metal Oxide Film Resistors - Type ROX Series - Tyco Electronics Passives

English