9-6474612-4 - ACTIVE

TE Internal #: 9-6474612-4 Wire-to-Board Jumpers & Shunts, Wire-to-Board, 8 Position, .1 in [2.54 mm] Centerline, Length 50.8 mm [2 in], Printed Circuit Board, Power & Signal

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Jumpers & Shunts



Connector System: Wire-to-Board

Number of Positions: 8

Centerline (Pitch): 2.54 mm [.1 in]

Product Length: 50.8 mm [2 in]

Connector & Contact Terminates To: Printed Circuit Board

Features

Product Type Features

Compatible With Discrete Wire Type	Solid	
Connector System	Wire-to-Board	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Conductors	8	
Number of Rows	1	
Number of Positions	8	
Electrical Characteristics		
Impedance	117 Ω	
Operating Voltage	300 VAC	
Body Features		
Jumper Insulation Material	Nomex	
Contact Features		
Pin Arrangement (Left)	A	

9-6474612-4

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 8 Position, .1 in [2.54 mm] Centerline, Length 50.8 mm [2 in], Printed Circuit Board, Power & Signal



Pin Arrangement (Right)	A	
Contact Current Rating (Max)	3 A	
Housing Features		
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
Wire Size	.25 mm ²	
Product Length	50.8 mm[2 in]	
Usage Conditions		
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Calden Dragen Caracle iliter	

Solder Process Capability

China RoHS 2 Directive MIIT Order No 32, 2016

Not reviewed for solder process capability

No Restricted Materials Above Threshold


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

9-6474612-4

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 8 Position, .1 in [2.54 mm] Centerline, Length 50.8 mm [2 in], Printed Circuit Board, Power & Signal



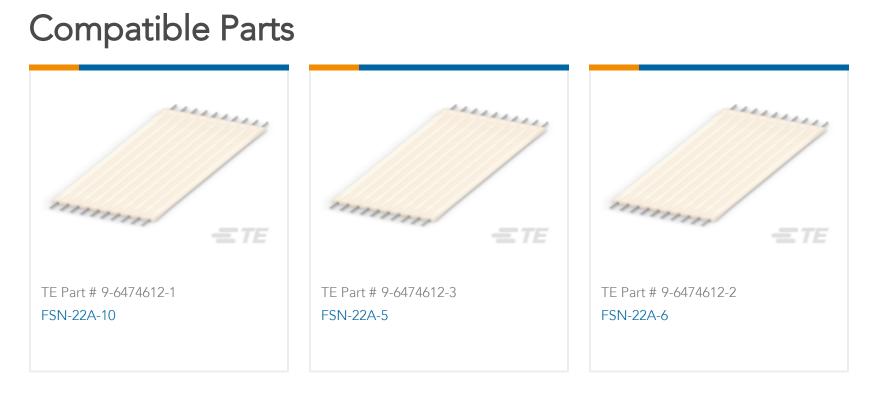

Customers Also Bought



TE Part #32205074	TE Part #7-1437166-4	TE Part #5-1437165-9	TE Part #160539-2	
GX518 1Pt100 W0.15 L5/D1.8mm	FSP-22A-8	FSP-21A-8	110 FASTON, REC., 20-17 AWG, TPBR	

TE Part #04ZZXLF015 /HYB/2x22+/SH/PVC/UL2549/GY/-/

Documents

Product Drawings

FSN-22A-8

English

Product Specifications

Product Specification

English

9-6474612-4

Wire-to-Board Jumpers & Shunts, Wire-to-Board, 8 Position, .1 in [2.54 mm] Centerline, Length 50.8 mm [2 in], Printed Circuit Board, Power & Signal



Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals

UL Report

English