

Positive Lock | Positive Lock 250

TE Internal #: 927389-2

Crimp Terminal Housings, Receptacle, Receptacle, 3 Position,

Straight, UL 94V-0, White, Polyamide 6.6, Mating Alignment,

Positive Lock 250

View on TE.com >



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings











Terminal Type: Receptacle

Connector & Housing Type: Receptacle

Number of Positions: 3

Terminal Orientation: Straight

UL Flammability Rating: UL 94V-0

Features

Product Type Features

Sealable	No
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Receptacle
Configuration Features	
Number of Positions	3
Body Features	
Primary Product Color	White
Contact Features	
Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	Without



Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Polyamide 6.6
Centerline (Pitch)	6.4 mm[.25 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	2000
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-154719-0 PL 250 REC HSG 1P NYLON NAT



TE Part # 1-174587-1
PL MK2 2P 187 HOUSING
RECEPTACLE NAT



TE Part # 926526-1
PL MKI 250 REC HSG 5P NYLON
BLACK



TE Part # 926319-1
PL 250 REC HSG 2P NYLON BLACK



TE Part # 927076-1
PL HOUSING 0.6 PA 6.6 + PE-GF13
BLACK



TE Part # 927389-1 PL 3P HOUSING PA66 BLACK



TE Part # 927422-1 POSITIVE LOCK 3P HOUSING PA6.6 BLACK



TE Part # 926646-8
PL 250 8P HOUSING PA6.6 ZYTEL 101
WHITE



TE Part # 1-154719-1
PL 250 REC HSG 1P NYLON NAT



2 POS POSITIVE LOCK (PL) HOUSING

Also in the Series | Positive Lock 250



Automotive Terminals(1)



Crimp Terminal Housings(193)




Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)



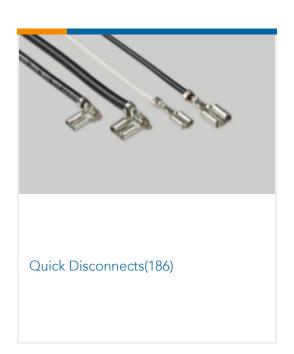

Customers Also Bought





















Documents

Product Drawings

POSITIVE LOCK 3P HOUSING PA 6.6 WHITE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_927389-2_A.2d_dxf.zip

Crimp Terminal Housings, Receptacle, Receptacle, 3 Position, Straight, UL 94V-0, White, Polyamide 6.6, Mating Alignment, Positive Lock 250



English

Customer View Model

ENG_CVM_CVM_927389-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_927389-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.