# AEGA047NN0000050A000 V ACTIVE

TE Internal #: AEA047N0000050A000 Standard Circular Connectors, Cable-to-Panel, 12 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 12 Signal Positions

#### View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Cable-to-Panel

Number of Positions: 12

Sealable: No

Circuit Application: Signal

Connector Mounting Type: Panel Mount

## Features

#### Product Type Features



| Connector SystemCable-to-PanelSealableNoCircular Connector TypeReceptacleShell TypeMetal |
|--|
| Circular Connector TypeReceptacleShell TypeMetal   |
| Shell Type Metal   |
|  |
| Configuration Features   |
|  |
| Number of Positions 12   |
| Number of Signal Positions 12  |
| Electrical Characteristics   |
| Operating Voltage 32 VAC   |
| Body Features  |
| Environmental Protection IP67  |
| Shell Plating Material Electrodeposited Nickel   |
| Shell Base Material Zinc Alloy   |

#### AEGA047NN0000050A000

Standard Circular Connectors, Cable-to-Panel, 12 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 12 Signal Positions



| Circular Connector Insulation Material Type | PBT GF                           |
|---|----------------------------------|
| Mechanical Attachment                       |                                  |
| Mating Retention Type                       | Speedtec (Triple Start Threaded) |
| Panel Mount Feature Type                    | Flange with Mounting Holes       |
| Connector Mounting Type                     | Panel Mount                      |
| Housing Features                            |                                  |
| Circular Connector Shell Size               | 17                               |
| Usage Conditions                            |                                  |
| Operating Temperature Range                 | -20 – 130 °C[-4 – 266 °F]        |
| Operation/Application                       |                                  |
| Durability Rating                           | 500 Cycles                       |
| Circuit Application                         | Signal                           |
| Shielded                                    | Yes                              |
| Industry Standards                          |                                  |
| UL Flammability Rating                      | UL 94V-0                         |
| Approved Standards                          | UL                               |

## Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU   | Compliant   |
|--|---|
| EU ELV Directive 2000/53/EC  | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016  | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006   | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content  | Not Yet Reviewed for halogen content  |
| Solder Process Capability  | Not reviewed for solder process capability  |
| Product Compliance Disclaimer<br>This information is provided based on reasonable inquiry of our suppliers and | •   |

based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

#### AEGA047NN0000050A000

Standard Circular Connectors, Cable-to-Panel, 12 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 12 Signal Positions



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## Compatible Parts



# Customers Also Bought





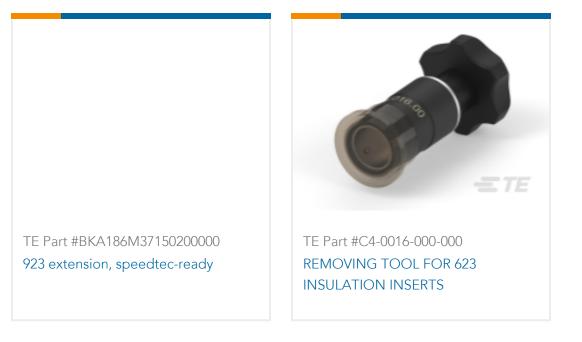

### Documents

#### **CAD** Files

**C** For support call+1 800 522 6752

#### AEGA047NN0000050A000

Standard Circular Connectors, Cable-to-Panel, 12 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 12 Signal Positions



#### 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_AEA047N0000050A000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_AEA047N0000050A000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_AEA047N0000050A000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages fuer Datenblaetter, die online konfigurierbar sind

German

617 Einbaudose, speedtec Flansch 21x21, 12-polig AEGA047NN0000050A000 DE/EN

German

AEA047N0000050A000

English