TE Internal #: AEA577N00000201000 Standard Circular Connectors, Cable-to-Panel, 17 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 17 Signal Positions

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Cable-to-Panel

Number of Positions: 17

Sealable: No

Circuit Application: Signal

Connector Mounting Type: Panel Mount

Features

Product Type Features

Connector SystemCable-to-PanelSealableNoCircular Connector TypeReceptacleShell TypeMetalConfiguration Features17Number of Positions17Number of Signal Positions17Electrical Characteristics125 VACOperating Voltage125 VACEnvironmental ProtectionIP67Shell Plating MaterialElectrodeposited NickelShell Base MaterialZinc Alloy	Product Type	Connector Assembly
Circular Connector TypeReceptacleShell TypeMetalShell TypeMetalConfiguration Features17Number of Positions17Number of Signal Positions17Electrical Characteristics125 VACOperating Voltage125 VACBody Features1967Environmental Protection1967Shell Plating MaterialElectrodeposited Nickel	Connector System	Cable-to-Panel
Shell TypeMetalConfiguration FeaturesNumber of Positions17Number of Signal Positions17Electrical CharacteristicsOperating Voltage125 VACBody FeaturesIP67Environmental ProtectionIP67Shell Plating MaterialElectrodeposited Nickel	Sealable	No
Configuration Features Number of Positions 17 Number of Signal Positions 17 Electrical Characteristics 17 Operating Voltage 125 VAC Body Features 1967 Environmental Protection 1P67 Shell Plating Material Electrodeposited Nickel	Circular Connector Type	Receptacle
Number of Positions17Number of Signal Positions17Electrical Characteristics12Operating Voltage125 VACBody Features125 VACEnvironmental Protection1967Shell Plating MaterialElectrodeposited Nickel	Shell Type	Metal
Number of Signal Positions17Image: Description of Signal Positions125 VACOperating Voltage125 VACImage: Description of Signal Protection1967Shell Plating MaterialElectrodeposited Nickel	Configuration Features	
Electrical Characteristics Operating Voltage 125 VAC Body Features Environmental Protection Shell Plating Material Intervine Protection Intervine Protection	Number of Positions	17
Operating Voltage125 VACBody FeaturesIP67Environmental ProtectionIP67Shell Plating MaterialElectrodeposited Nickel	Number of Signal Positions	17
Body Features Environmental Protection IP67 Shell Plating Material Electrodeposited Nickel	Electrical Characteristics	
Environmental Protection IP67 Shell Plating Material Electrodeposited Nickel	Operating Voltage	125 VAC
Shell Plating Material Electrodeposited Nickel	Body Features	
	Environmental Protection	IP67
Shell Base Material Zinc Alloy	Shell Plating Material	Electrodeposited Nickel
	Shell Base Material	Zinc Alloy

Standard Circular Connectors, Cable-to-Panel, 17 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 17 Signal Positions



Circular Connector Insulation Material Type	PBT GF
Mechanical Attachment	
Mating Retention Type	Screw
Panel Mount Feature Type	Flange with Mounting Holes
Connector Mounting Type	Panel Mount
Housing Features	
Circular Connector Shell Size	23
Alignment Keyed	0°
Usage Conditions	
Operating Temperature Range	-20 – 130 °C[-4 – 266 °F]
Operation/Application	
Durability Rating	500 Cycles
Circuit Application	Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94V-0
Approved Standards	UL

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

Standard Circular Connectors, Cable-to-Panel, 17 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 17 Signal Positions



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought

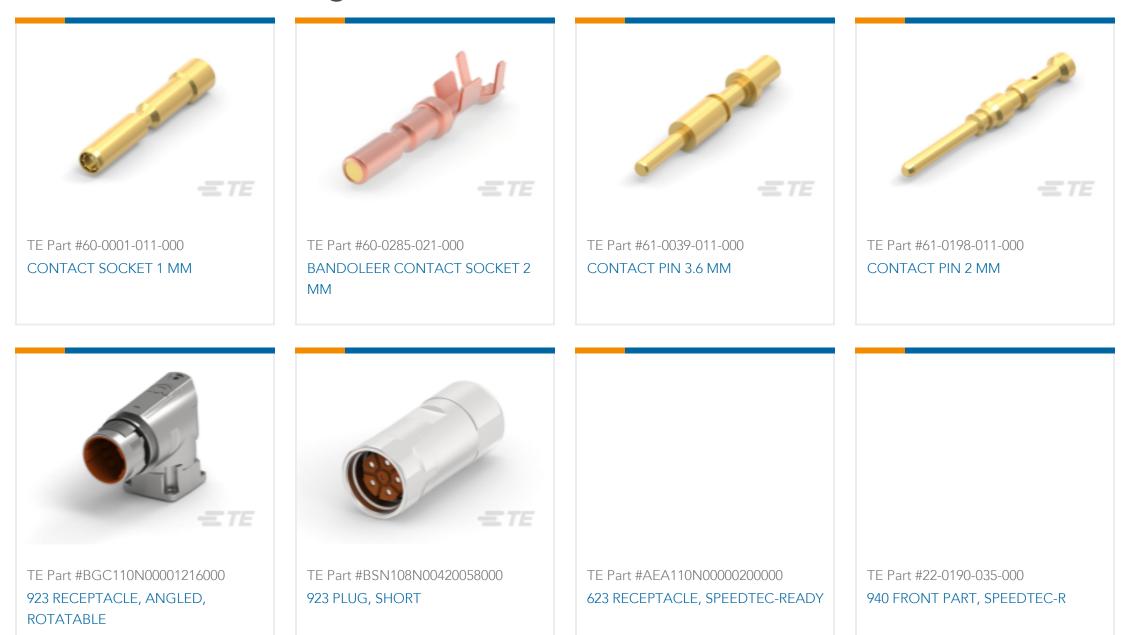



Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_AEA577N00000201000_A.2d_dxf.zip English Customer View Model ENG_CVM_CVM_AEA577N00000201000_A.3d_igs.zip English Customer View Model

C For support call+1 800 522 6752

Standard Circular Connectors, Cable-to-Panel, 17 Position, Signal, Panel Mount, Electrodeposited Nickel, Zinc Alloy, PBT GF, 17 Signal Positions



ENG_CVM_CVM_AEA577N00000201000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AEA577N00000201000

English

fuer Datenblaetter, die online konfigurierbar sind

German