ANT-916-MHW-SMA-S

TE Internal #: ANT-916-MHW-SMA-S Module Antenna, Single Band, LoRaWAN / LPWAN, Remote Mount, Adhesive, SMA, Omnidirectional, Single Port, Gain 3 < 6 dBi View on TE.com >



Antennas



Wireless Application: LoRaWAN, LPWAN, Wi-Fi

Mounting Location: Remote

Mounting Type: Adhesive

Antenna Termination: SMA

Antenna Type: Module

Features

Product Type Features

Antenna Termination	SMA
Configuration Features	
Antenna Style	Whip

Mounting Location	Remote
Antenna Type	Module
Band Type	Single Band
Port Configuration	Single Port
Electrical Characteristics	
VSWR (Max)	<1.9:1
Impedance	50 Ω
Signal Characteristics	
Gain (Max)	5.4 dB
Frequency Band	915 MHz
Nominal Frequency Range	902 - 930
Peak Gain	3 < 6 dBi
Body Features	
Product Weight	44 g[1.55202 oz]
Mechanical Attachment	
	00/00/2000 00 0

C For support call+1 800 522 6752

09/28/2023 08:06AM | Page 1

ANT-916-MHW-SMA-S

Module Antenna, Single Band, LoRaWAN / LPWAN, Remote Mount, Adhesive, SMA, Omnidirectional, Single Port, Gain 3 < 6 dBi



Polarization	Linear
Mounting Type	Adhesive
Dimensions	
Cable Length	2 m[6.56 ft]
Product Width	15.5 mm[.61 in]
Product Length	138 mm[5.43 in]
Product Height	9.7 mm[.38 in]
Operation/Application	
Directionality	Omnidirectional
Industry Standards	
Wireless Application	LoRaWAN, LPWAN, Wi-Fi
Primary Application	LoRaWAN, LPWAN
Product Compliance	

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

Compliant with Exemptions

Not Yet Reviewed

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

ANT-916-MHW-SMA-S


Module Antenna, Single Band, LoRaWAN / LPWAN, Remote Mount, Adhesive, SMA, Omnidirectional, Single Port, Gain 3 < 6 dBi



Compatible Parts



Customers Also Bought

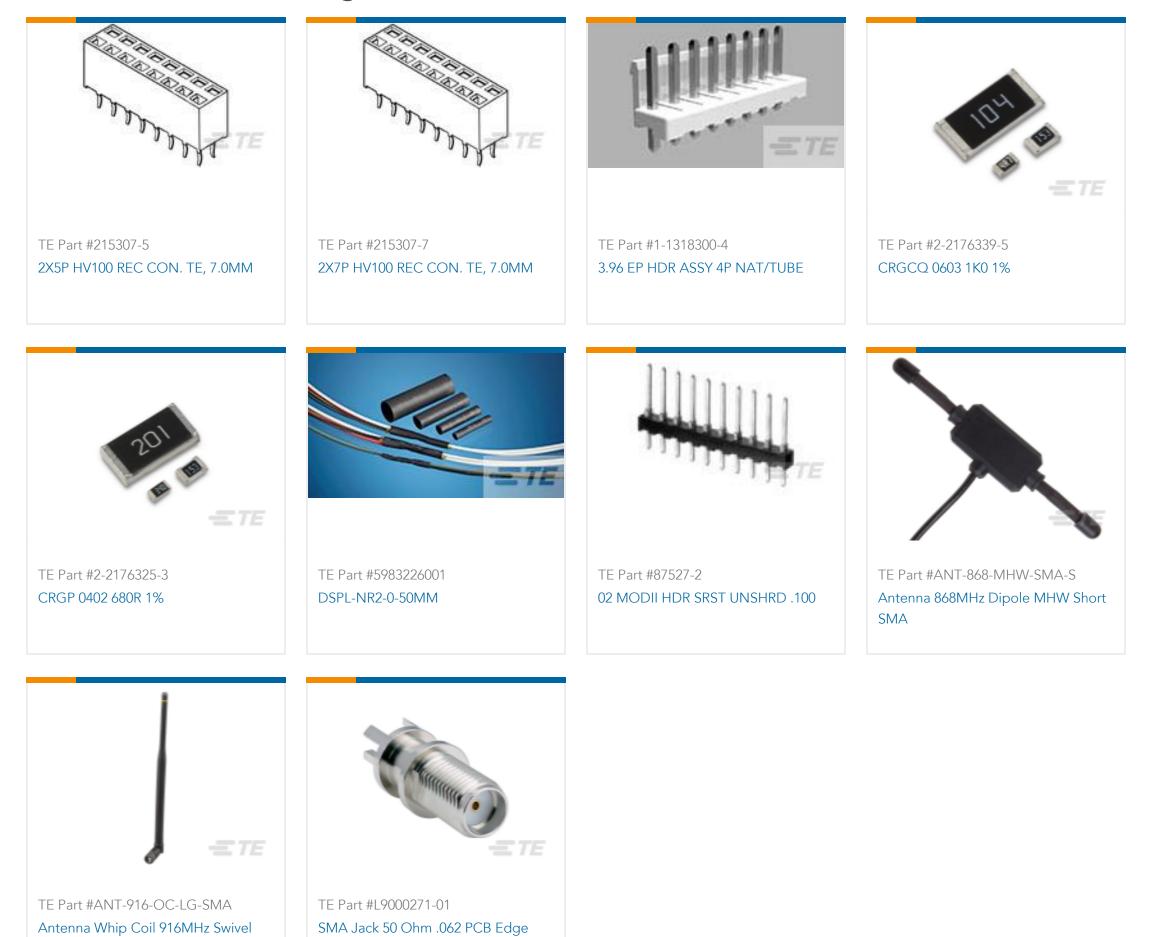

Documents

Product Drawings Antenna 916MHz Dipole MHW Short SMA

Mount

English

SMA

Datasheets & Catalog Pages ANT-916-MHW-xxx-x

English

ANT-916-MHW-SMA-S

Module Antenna, Single Band, LoRaWAN / LPWAN, Remote Mount, Adhesive, SMA, Omnidirectional, Single Port, Gain 3 < 6 dBi

